
Submitted Model No.: **Specific Features:**



▲ Designate proper finish suffix

Spray Patterns

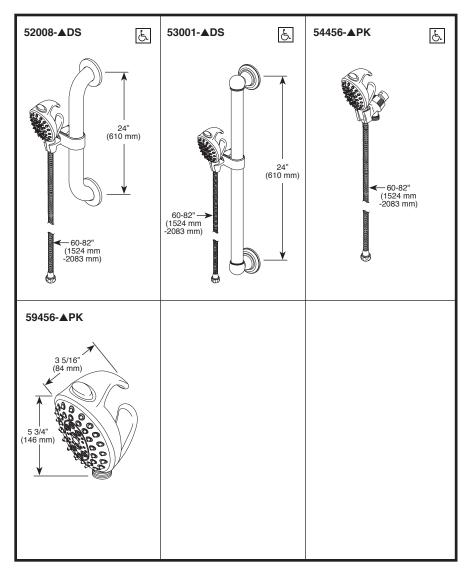

Full Body

Spray



Massage





w/Massage

Full Spray

Pause

♦ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

see what Delta can do

PALM® SHOWER

- Push Button Spray Selection
- 60-82" Stretchable Metal Hose

STANDARD SPECIFICATIONS:

- Maximum 2.5 gpm @ 80 psi, 9.50 L/min @ 550 kPa
- Change spray modes with push button
- 60-82" (1524 mm 2083 mm) stretchable hose (52008-△DS, 53001-△DS & 54456-△PK)
- Includes double check valves for backflow prevention
- ADA compliant grab bar with concealed screw mounting system: (52008-▲DS & 53001-▲DS)
- Hand held shower with four spray settings pause is a nonpositive shut-off

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- ASME A112.18.3

Indicates compliance to

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.