




## Vinyl Stair Nose Moulding Installation Instructions

The Project Source Vinyl flush mount stair nose is a moisture proof moulding that is suitable to finish step downs and stair installations. The Project Source Vinyl flush mount stair nose is designed for versatility and beauty. One moulding can accommodate a wide range of floor thicknesses, from 2mm up to 7.5mm in thickness. The width of the stair nose provides a more polished finished stair tread than other products. The longer length will accommodate more stairs and can be used on bull-nosed and squared-nosed stair installations. Just follow these simple steps.

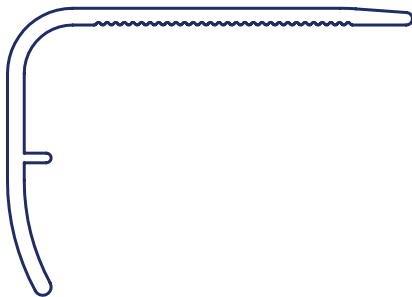

78-3/4 in · 2m

### Step 1: Measure and trim to fit.

- For flush installation, install matching shim to the edge of the stair tread.
- A shim is not required for overlap installation.

Flush mount with shim




Overlap without shim



## Vinyl Stair Nose Moulding Installation Instructions


### Step 2: Apply polyurethane adhesive to underside.

- “S” shaped bead on ribbed surface of nosing.
- Straight bead under stand-off elbow.

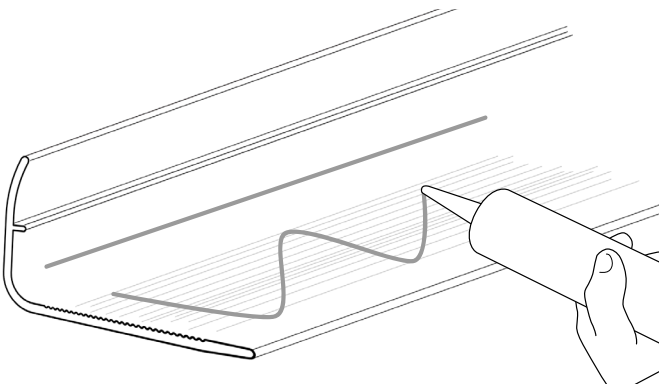


### Step 3: Carefully position the trim and press down firmly along the entire stair nose.

Flush mount with shim

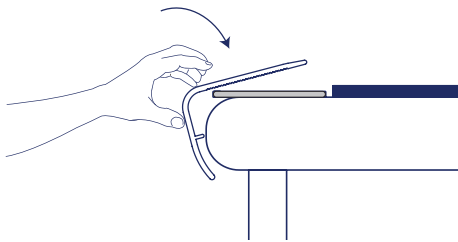

Overlap without shim

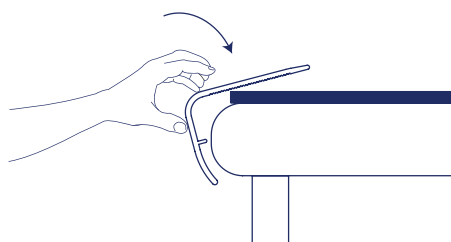

### Step 4: Let adhesive cure for at least 4 hours before walking on it.

- Wait 24–48 hours for full traffic exposure.