

Before you start

Set up your refrigerator

Remove tape and glue residue from surfaces before turning on the refrigerator. Choose a place near a grounded electrical outlet, allowing for clearances for ease of installation, proper circulation, and plumbing and electrical connections.

Before operating for the first time

After you remove all of the package materials, clean the inside of your refrigerator before using it. See **CARE AND CLEANING** in your Use & Care Manual.

You're in control




Your appliance control display*

We recommend you set your temperatures at 37°F (3°C) for the refrigerator compartment and 0°F (-18°C) for the freezer. After 24 hours, you can adjust the control as desired, allowing the temperature to stabilize. *Control display varies by model. See the Use & Care Manual for more detailed information about your appliance.

"Control display varies by model. See the Use & Care Manual for more detailed information about your applia

EXTERNAL DISPENSER CONTROL DISPLAY

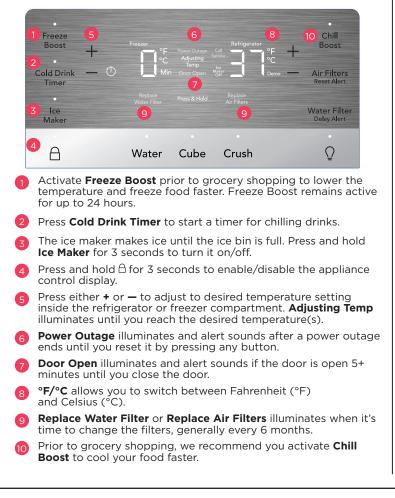

INTERNAL DISPENSER CONTROL DISPLAY



Use to lock the display. Press and hold a for 3 seconds to enable/disable. The indicator flashes and an alert sounds when **CONTROL LOCK** is enabled. You can't make changes on the display while the lock is engaged. Select compartment for temperature

 Select compartment for temperature change (FREEZER or REFRIGERATOR).
Press either the + or — to adjust to desired temperature setting.

Freezer temp - Control temperatures range from $-6^{\circ}F / -21^{\circ}C$ to $+6^{\circ}F / -15^{\circ}C$.

Refrigerator temp - Control temperatures range from $+34^{\circ}F / +1^{\circ}C$ to $+44^{\circ}F / +7^{\circ}C$. This unit is designed to operate at $37^{\circ}F$ Refrigerator/0°F Freezer. Temperatures should stabilize within 24 hours of installation.

Clear Alerts resets any alarms that are active and illuminated on the display (Door Open, High Temp, Power Outage).

Activate **Freeze Boost** prior to grocery shopping to lower the temperature and freeze food faster. Freeze Boost remains active for up to 24 hours.

°F/°C allows you to switch between Fahrenheit (°F) and Celsius (°C).

Press and hold for 3 seconds to enable/disable the water dispenser. When enabled, the LEDs above Water Dispenser illuminates.

Press and hold **Default Settings** for 3 seconds to reset to default settings.

Press and hold **Water Filter** or **Air Filters** for 3 seconds to reset after replacing the filter.

Keep it fresh




Frigidaire PureAir[®] RAF-2[™] Replacement Refrigerator Air Filter (1 included)

- More powerful than baking soda, the new PureAir RAF-2 Replacement Refrigerator Air Filter absorbs undesirable smells keeping your fridge fresher for up to 6 months.
- The air filter is located at the top center of the refrigerator compartment. To change your filter:
 - Remove the air filter cover by squeezing the top and bottom of the cover together and removing it from the liner.
 - 2. Remove the old filter and discard it.
 - 3. Unpack the new filter and snap it into the filter cover. Install the open face (carbon media) of the filter facing outward in the cover.
 - 4. Replace the air filter cover by squeezing the sides and snapping it back into place.
 - 5. To reset, after replacing the filter, press and hold Air Filter on the appliance control display for 3 seconds. The status will reset to GOOD.

Frigidaire PurePour Connect™ PWF-2™ Ice & Water Refrigerator Filter (1 installed)

- Makes safer water second nature certified to reduce contaminants and keep great-tasting water flowing for you and your family for up to 6 months.
- The water filter is located at the top right side of the refrigerator compartment.
- Before dispensing water for the first time, be sure to prime the water supply system:
 - 1. Press and hold a drinking glass against the water dispenser paddle until water comes out (it may take up to 1¹/₂ minutes).
 - 2. Run water through the dispenser for approximately 3 minutes (or 1.5 gallons) before use, and discard.



produce (2 included)

- 1. Remove the outer plastic wrapper.
- 2. Insert the unopened packets into the holder in the Crisper, as shown on the left.

For optimal results, replace your air and water filters every 6 months, and your Produce Keeper Plus every 12 months.

FAQs

How do I use the internal water dispenser?

Your internal water dispenser is located in the left hand refrigerator door. To use the dispenser simply hold the door with one hand while placing your cup under the nozzle and pushing the paddle to dispense water with your other hand. If your cup doesn't enable the water dispenser paddle due to size, use your finger to activate the paddle for dispensing.

Why does my refrigerator seem to run continuously?


Your refrigerator is equipped with an energy-efficient variable speed compressor. It actually saves energy running more frequently while maintaining even temperatures.

How does my CrispSeal® Fresh Crisper work?

Our crispers block out dry air and slow down the aging process of your produce by reducing ethylene gases, which cause produce to ripen faster.

Good news - no settings needed! CrispSeal Fresh crispers are equipped with an automatic humidity control membrane. We do not recommend replacing the auto-humidity membrane unless it becomes damaged or dirty. If the membrane requires cleaning, you can simply wash it with soap and water. Make sure you thoroughly dry the membrane before replacing in your refrigerator.

For more information refer to TROUBLESHOOTING in the back of your Use & Care Manual.



Let's make it official!

Take the first step to becoming a part of the Frigidaire family and discover more benefits by registering your multi-door refrigerator.

Look for the PhotoregistersM icon on your registration card or register via the Frigidaire App.



Have a question? Want help?



Need service?

Scan the QR Code to the right or visit frigidaire.com • frigidaire.ca for owner support









FRPAPK2RF™