



# USER MANUAL CL-BU-G150 | 15000 LUMEN LED GARAGE LIGHT WITH 4 PANELS

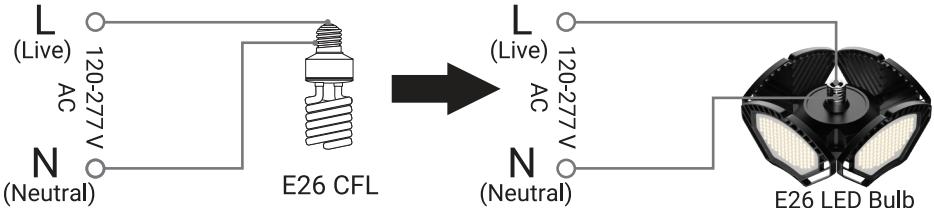

## CARE FOR YOUR PRODUCT:



Your product will last for many years with minimum care. Therefore, it is essential to clean the product periodically. Use a soft, non-abrasive cloth or a mild, non-abrasive glass cleaner. It is essential NOT to use any solvents or harsh cleaning agents. **When cleaning, make sure the power is OFF.** Do not spray liquid directly onto the product or wiring. Instead, spray or pour a small amount into the cloth and clean the product.

## TROUBLESHOOTING:

Problem	Possible Cause	Solution
The product does not turn on	The power is off	Check the power supply and make sure it is ON
	Bad connection	Check the wiring
	Faulty switch	Test and/or replace the switch
Circuit breaker trips or fuse blows when light is turned on	Discontinue use immediately	Call customer service 1-888-745-4837 Call an electrician

## EYES:



- **DO NOT** look directly at the LED lights.
- **DO NOT** remove the LED lights protective covering.

## CARE FOR YOUR PRODUCT:



This product has a **two-year limited warranty** from the date of purchase—this guarantees against failure due to factory defects, whether caused by materials or workmanship. The warranty is non-transferable and only pertains to the original purchaser. Proof of purchase is required for any repair or replacement, so please keep your proof of purchase receipt. This warranty does not cover normal wear and tear or damage due to misuse. Misuse of this product includes but is not limited to:

- Using outdoors in extreme weather conditions.
- Opening the product's housing.
- Any attempts to update, remodel or fix the unit yourself.

If you have questions or are missing parts, please contact customer service at 1-888-745-4837



**WARNING:**  
RISK OF ELECTRICAL SHOCK.  
TO AVOID ELECTRICAL SHOCK, MAKE SURE TO TURN  
OFF THE MAIN POWER SOURCE OR DISCONNECT POWER  
DURING THE INSTALLATION OR SERVICE  
OF THIS PRODUCT

# USER MANUAL CL-BU-G150 | 15000 LUMEN LED GARAGE LIGHT WITH 4 PANELS

Lumen: 15000LM  
Watts: 100W  
Equivalent: 900W Incandescent  
LED Lifespan: 30,000 Hours  
Operating Voltage: 120V  
CRI: 80  
Color Temp (CCT): 5000K Daylight  
Base: E26 / Standard Edison  
Damp Rated: Yes  
Operating Temperature: -4°F to 104°F  
(-20°C to 40°C)



**Ballast must be bypassed if present.**



## **WARNING:** YOU SHOULD ALWAYS FOLLOW BASIC PRECAUTIONS.

Read, follow, and understand all instructions and warnings before beginning any installation of this product. Failure to do so can result in electric shock, fire, or other injuries, including death. This product should be installed following these instructions, electrical codes, and by the National Electric Code (NEC). Save this user manual for instructions and warnings for possible future relocation and installation.



## **CAUTION:**

- This product is not waterproof and is designed for dry and damp use only.
- Avoid environments with extreme dust and/or humidity.
- **DO NOT** use on radiant heated surfaces.
- **DO NOT** remove the lens protecting the LED.
- **DO NOT** use near a gas source.
- **DO NOT** open the product. It is NOT possible to change the LED lights or source.
- This product is not intended for use in possible explosive areas. It should never be in an area of exposure to vapor elements.
- This product is NOT a toy and should stay out of children's hands.
- This product is not intended for use with emergency exits.



If you have questions or are missing parts, please contact customer service at 1-888-745-4837

## ADDITIONAL WARNINGS:

- **DO NOT** open the product. It is **NOT** possible to change the LED lights or source.
- **DO NOT** use this product in small enclosures. It is recommended for medium to large size rooms.
- Temperature rating is from -4°F to 104°F.
- This product is designed for dry/damp use and is not waterproof. Never use near standing water.
- Although this product is simply screwed into a socket, it is important to make sure no bare wires are exposed and that all wiring is insulated.
- This product is **NOT** to be used with dimmers. Dimmers can damage the product and usage of one will void the warranty.
- This product is not intended for use with emergency exits.



### WARNING:

RISK OF ELECTRICAL SHOCK.

TO AVOID ELECTRICAL SHOCK, MAKE SURE TO TURN OFF THE MAIN POWER SOURCE OR DISCONNECT POWER DURING THE INSTALLATION OR SERVICE OF THIS PRODUCT

# USER MANUAL CL-BU-G150 | 15000 LUMEN LED GARAGE LIGHT WITH 4 PANELS

## INSTALLATION INSTRUCTIONS:

1. Before installing, make sure to shut the power OFF at the circuit breaker. It is highly recommended that a surge protector is installed. **If Ballast is present, it must be bypassed.**
2. Remove the existing bulb by unscrewing in a counter-clockwise direction.
3. In a clockwise direction, screw in the unit. Do not overtighten as this may cause damage to the light and/or the socket. It may be necessary to pivot each light panel down before screwing in the unit.
4. Turn the power ON at the circuit breaker.
5. Turn the light switch ON. The LEDs will illuminate.
6. There are 4 adjustable light panels. Pivot each one to meet the desired light in the area. To protect your eyes, **never look directly into the LED lights** even when adjusting the panels.



This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that the interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and receiver. (3) Connect the equipment into an outlet on a circuit different from that of the receiver. (4) Consult the dealer or an experienced radio/TV technician for help.



If you have questions or are missing parts, please contact customer service at 1-888-745-4837



If you have questions or are missing parts, please contact customer service at 1-888-745-4837