

Features


- Compression molded from our exclusive solid Vikrell® material
- Modular 4-piece design
- Pivot "snap together" installation
- Caulkless installation
- Convenient shelves provide generous storage
- Durable high-gloss finish
- Lightly pebbled bottom surface for sure footing
- 10-year consumer/3-year commercial limited warranty
- Wall surround allows for attachment of grab bars
- 48-1/8" (107 cm) x 37-1/4" (94.6 cm) x 77" (195.6 cm) rough-in dimensions include nailing flange
- 42" (106.7 cm) x 36" (91.4 cm) x 71-1/4" (181 cm) complete unit finished dimensions

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- CSA B45

42" (106.7 cm) RECEPTOR AND SURROUND W/BACKER BOARDS 72250106

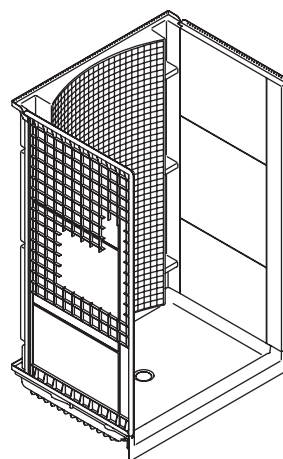

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
72250106	42" (106.7 cm) shower receptor and wall surround with backer boards	☐ 0	☐ Other_____

Model	Wall Component Description	Colors/Finishes	
72252100	42" (106.7 cm) Backwall	☐ 0	☐ Other_____
72251100	42" (106.7 cm) Receptor	☐ 0	☐ Other_____
72245106	Endwall set with backer boards	☐ 0	☐ Other_____

Technical Information

Model	door maximum width	door maximum height
72250106	38-5/8" (98.1 cm)	72" (182.9 cm)

Installation Notes

Install this product according to the installation guide.




Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for roofing nail use.

Receptor cannot be installed without the wall surround.

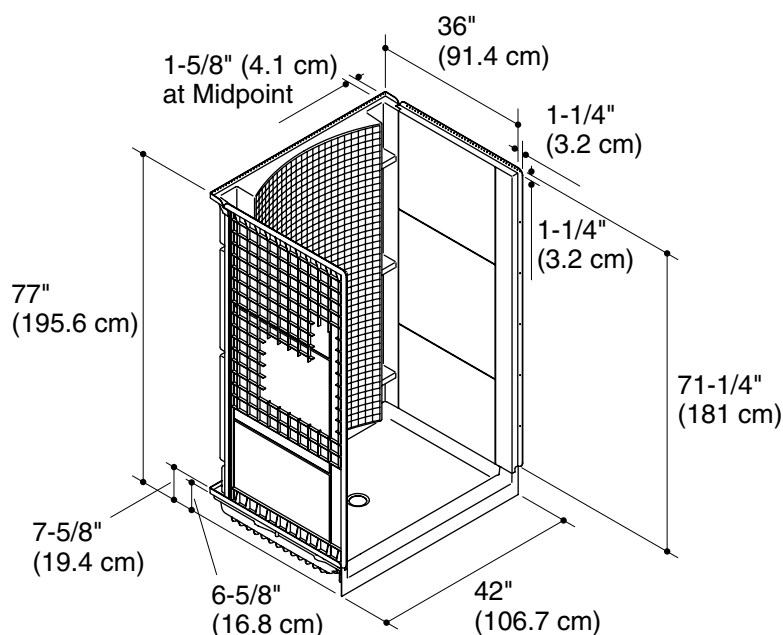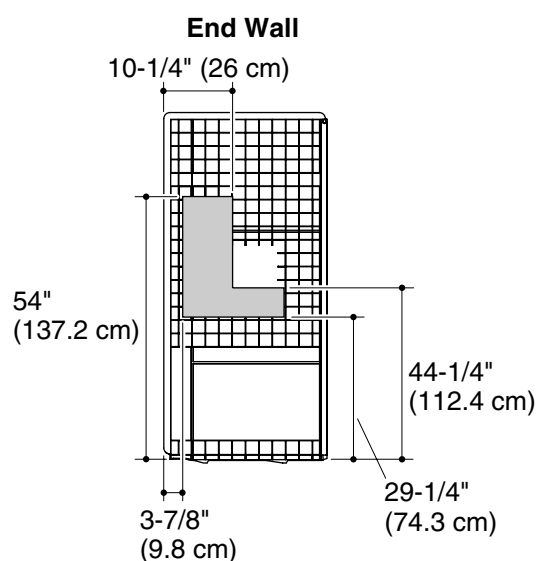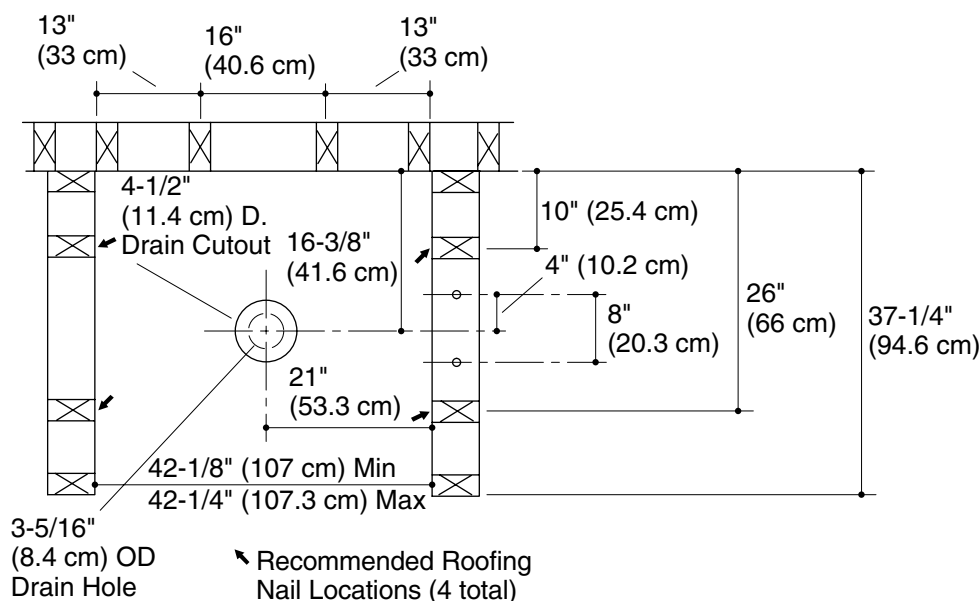

Product Diagram