TOTO_®

MS644114CEF(G)

Carolina® II One-Piece High-Efficiency Toilet, 1.28GPF

FEATURES

- Double Cyclone® flushing system, low consumption (1.28GPF/4.8LPF)
- Skirted design
- SanaGloss® ceramic glaze prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning (not avail on Ebony #51)
- Universal Height
- Decorative one-piece design with low-profile tank
- Elongated front bowl with SoftClose® seat (SS114)
- 12" Unifit rough-in (included), less supply
- Chrome trip lever

MODELS

- MS644114CEFG
 With SanaGloss ceramic glaze, SS114 SoftClose
 seat included
- MS644114CEF Less SanaGloss, SS114 SoftClose seat included (#51 only)

COLORS/FINISHES

#01 Cotton

#03 Bone

#11 Colonial White

#12 Sedona Beige

#51 Ebony (not available in SanaGloss)

OPTIONAL ROUGH-IN

10" rough-in TSU01W.1014" rough-in TSU01W.14

PRODUCT SPECIFICATION

The one-piece high-efficiency Double Cyclone flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall have optional SanaGloss ceramic glaze and be at Universal Height. Toilet shall have low-profile tank, elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS644114CEF_____.



SanaGloss

CACLONE

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)







Carolina® II One-Piece High-Efficiency Toilet, 1.28GPF

SPECIFICATIONS

Water Use
Flush System
Min. Water Pressure
Water Surface
Trap Diameter
1.28 GPF/4.8LPF
Bouble Cyclone®
8 psi (flowing)
6-7/8" x 9-3/4"
2-1/8"

Irap Diameter 2-1/8"
 Rough-in 12"
 Trap Seal 2-1/8"

• Warranty One Year Limited Warranty

Material Vitreous china

• Shipping Weight 108 lbs.


Shipping Dimensions 29-1/2" L x 18"W


 $\times 19-1/4$ " $H^1 \times 27-1/8$ " H^2


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

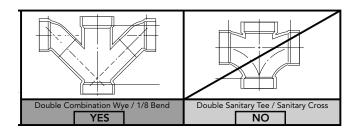

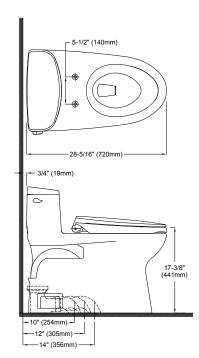





These dimensions and specifications are subject to change without notice