FORIOUS

You Can't Imagine that

WE ARE CHANGING THE WORLD !

www.forious.com

FORIOUS

INSTALLATION INSTRUCTIONS

Notice:

1.Cleaning
Before installation,shut off the water supply valves and clean up the water supply system.
Clean the area of the mounting holes before installation.

2. Mounting hole
Make sure the mounting hole size is between Ø1.30" - Ø 1.38" as shown in the diagram.

3.Parameter
Water pressure: Min: 0.05MPa Max: 0.75MPa
Temperature of water supply ≤ 85℃
Working temperature ≥ 20℃

Includes:

1. Faucet
2. Spray Head(for pull-out faucets only)
3. Mountng Hardware: rubber washer, metal washer, mounting nut and fixing nut
4. Counter Weight
5. Hoses
6. Deck Plate(optional part)

Installation Steps:

1. Take the faucet out of the packing box.
   A. For 1-hole sink, install the deck plate on the bottom of the faucet (if the base is not needed, skip this step), then fit the faucet to the mountIng hole on the sink.
   B. For 3-hole sin k, install the deck plate on the bottom of the faucet, then fit the faucet to the mountIng hole on the sink,cover the two holes next to the faucet.

2. Put the rubber washer, metal washer and fixing nut into the bottom of the faucet in turn.

3. Use a cross screwdriver to thread the 2 screws.

4. Connect the hot and cold water supply hose to the hot and cold water outlet of the faucet.

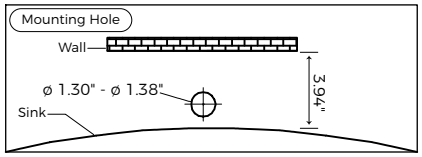

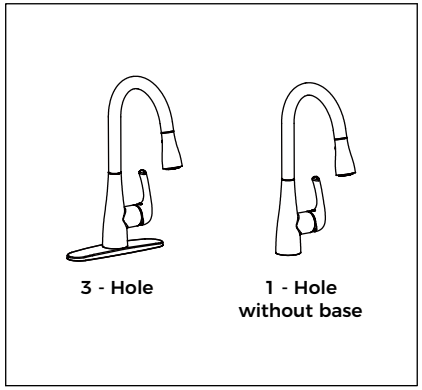

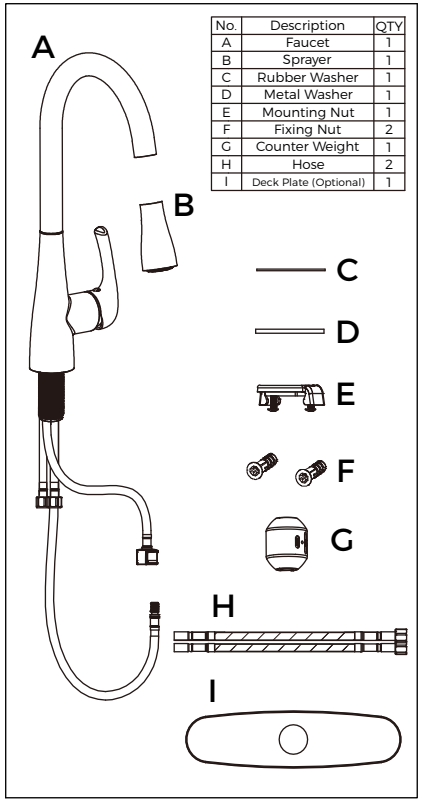

No.	Description	QTY
A	Faucet	1
B	Sprayer	1
C	Rubber Washer	1
D	Metal Washer	1
E	Mounting Nut	1
F	Fixing Nut	2
G	Counter Weight	1
H	Hose	2
I	Deck Plate (Optional)	1









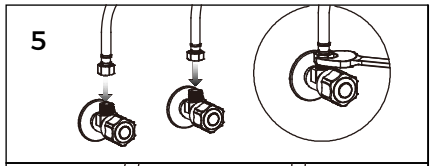

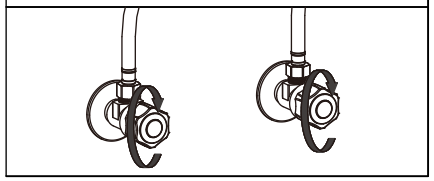

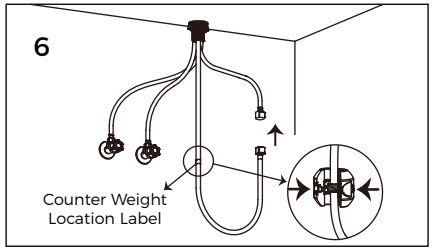

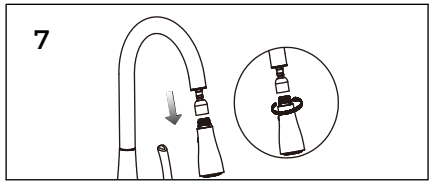

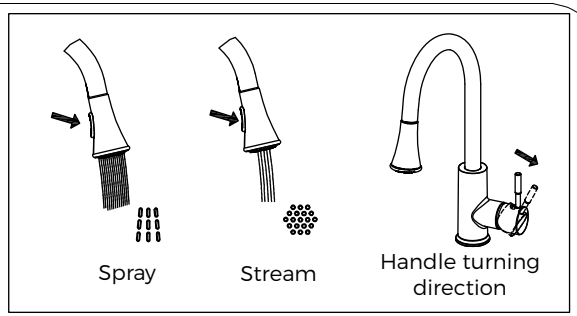

5. Connect the hot & cold supply hose onto the matching water valves and secure the connection with an adjustable wrench.

6. Connect the water outlet hose to the hose of the sprayer.Install the counterweight on the hose con nected to the sprayer.

7. Install the sprayer to the water outlet.

Maintenance:

1. Operate the faucet gently in order for a sustainable use.
2. Always blot dry any water from faucet surface. Clean with a damp non-abrasive sponge and wipe it with a clean soft cloth should be helpful to maintain good finish of the faucet. To remove water spots, please apply warm water and a damp soft cloth. Make certain to rinse thoroughly with water immediately after cleaner.
3. Although the finish is extremely durable, it can be damaged by some cleaners.Do not use detergent powder, polishing powder, granular detergent or nylon brush to clean.
4. Do not use acidic detergents.If happened,it must be rinsed properly and wiped dry with a soft cloth.
5. When the air temperature is below 0℃,a measure should be taken to keep the faucet working condition warm.
6. Shut off the water supply valves when the faucet wll not be in use for an extended amount of time.
7. We reserve the right to make revisions in the design of products without notice.