

ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 5002

For Wall Mount Light Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

MOUNTING THE FIXTURE

Installation (see fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the single bar.
2. Thread the nipple part way into the center hole of the single bar and secure with hex nut.
3. Attach the arm(C) part way onto the side hole of the back plate(D), then lock the washer and hex nut(F) until tight.
4. Attach the single bar to the junction box using two junction box screws. The side of the single bar marked "GND" must face out.
5. Follow wiring instructions carefully (see fig.2)
6. Place the fixture body (D) over the nipple then tighten it with the ball nut (E).
7. Attach the cover (B) onto the socket , Place the socket sleeve (A) over the socket.
8. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the single bar.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1

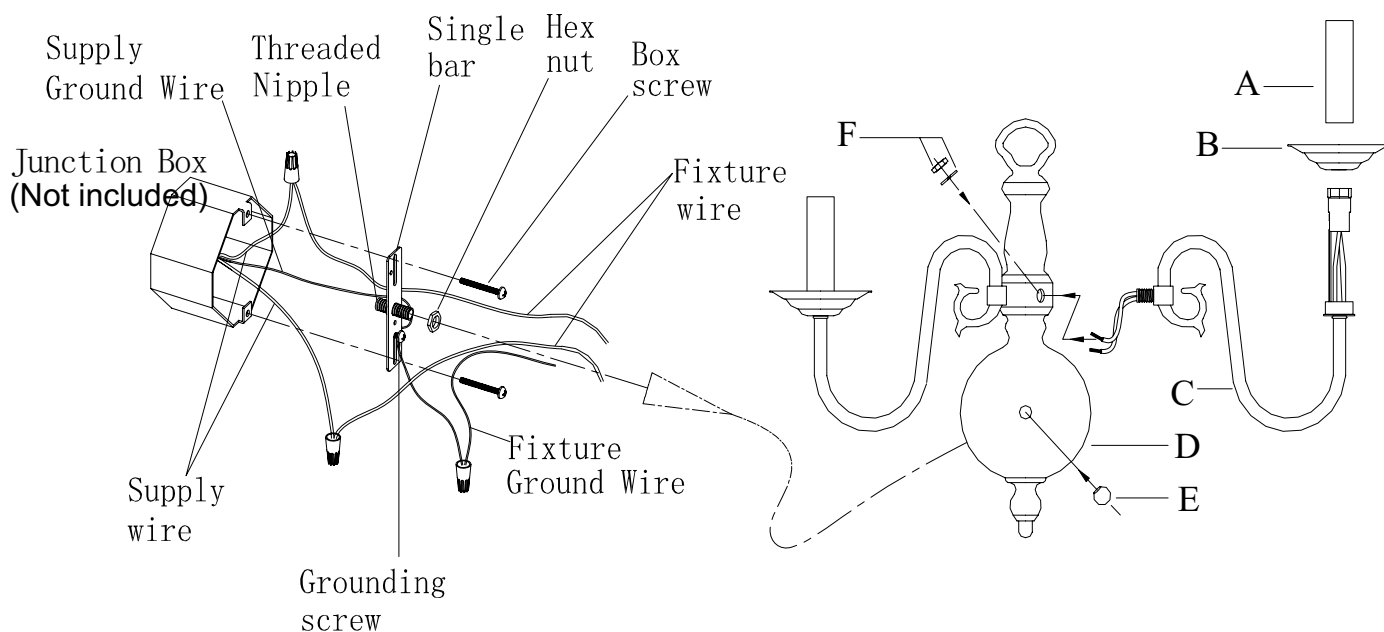


Fig.2

FIXTURE WIRES Black or Smooth	FIXTURE WIRES White or Ribbed	FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Black (Hot)	HOUSE WIRES White (Neutral)	HOUSE WIRES Green or Bare Copper (Ground)