


ASSEMBLY INSTRUCTIONS




**CAUTION**

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED

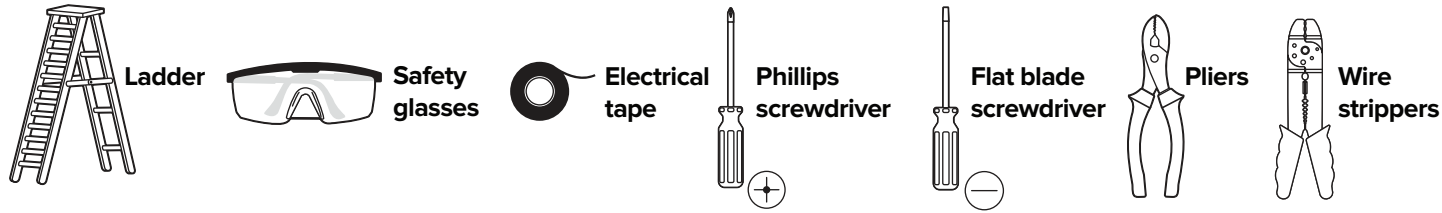


HARDWARE INCLUDED




\* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

EXPLODED PARTS

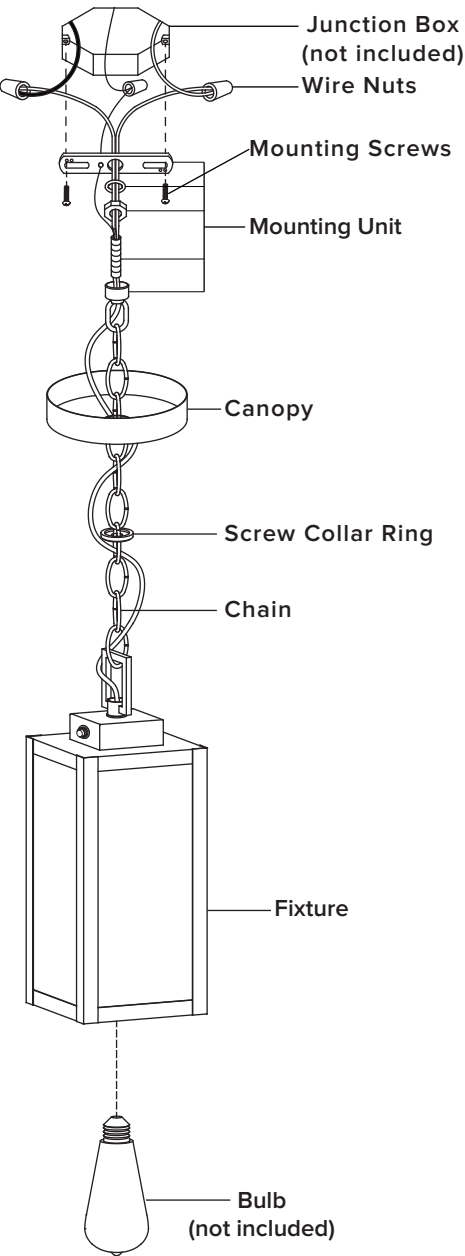


INSTALLATION  
STEP 1

1. Choose the length of the **chain** you need (Open the chain using a phillips screwdriver (not included) and pliers (not included). )
2. Attach the end of the **chain** to the loop on the **fixture**.

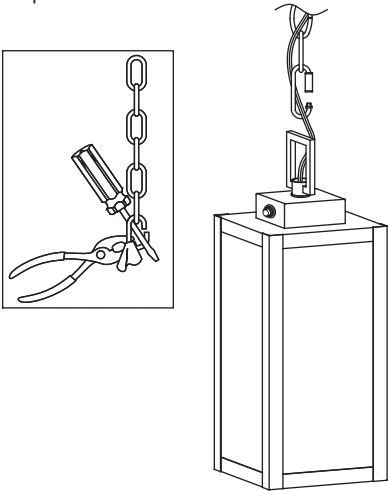


STEP 2

Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).

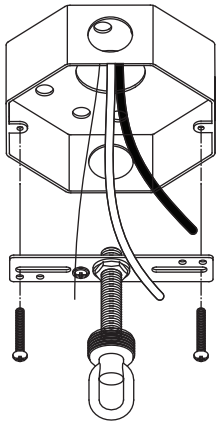



STEP 3

1. Pass the **chain** and the branch wires through the **screw collar ring** and **canopy**.
2. Attach the end of the **chain** to the **mounting unit**.
3. Feed the branch wires through the pipe nipple on the **mounting unit**.

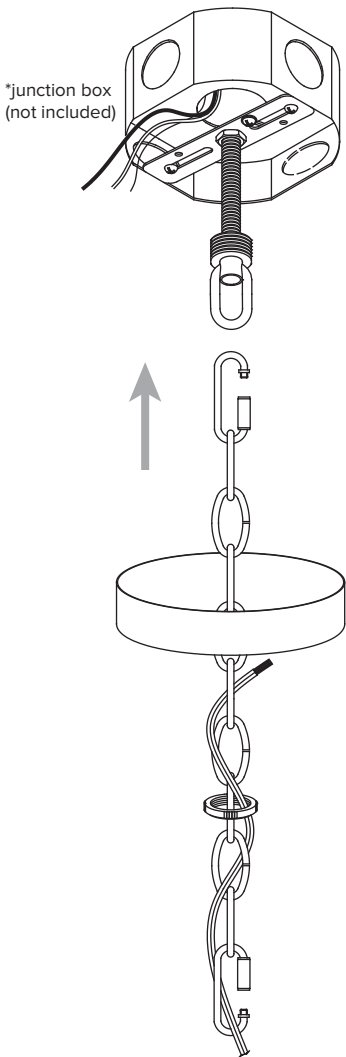

STEP 4


Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied **wire nuts**. Secure with electrical tape.

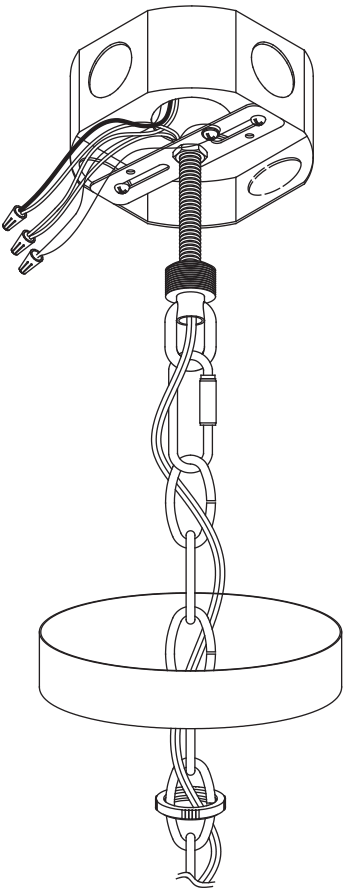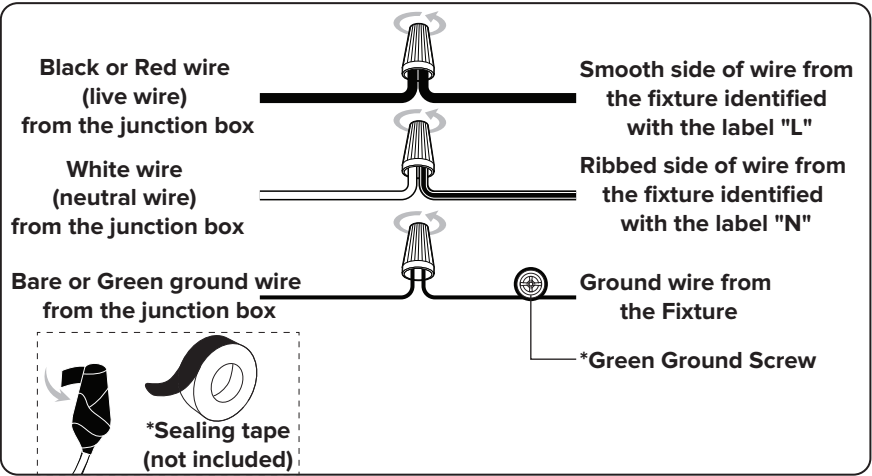

STEP 5

Secure the **canopy** to the **mounting unit** with the **screw collar ring**.

NOTICE: Before use, add silicone glass sealant between the ceiling and the canopy to completely cover the gap.

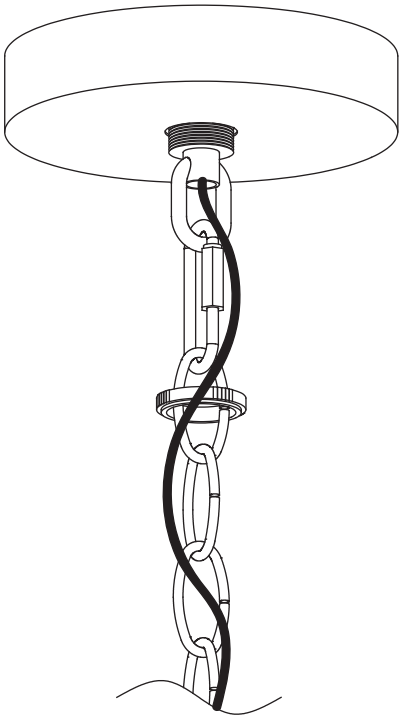

STEP 6

Install bulb (not included)

