




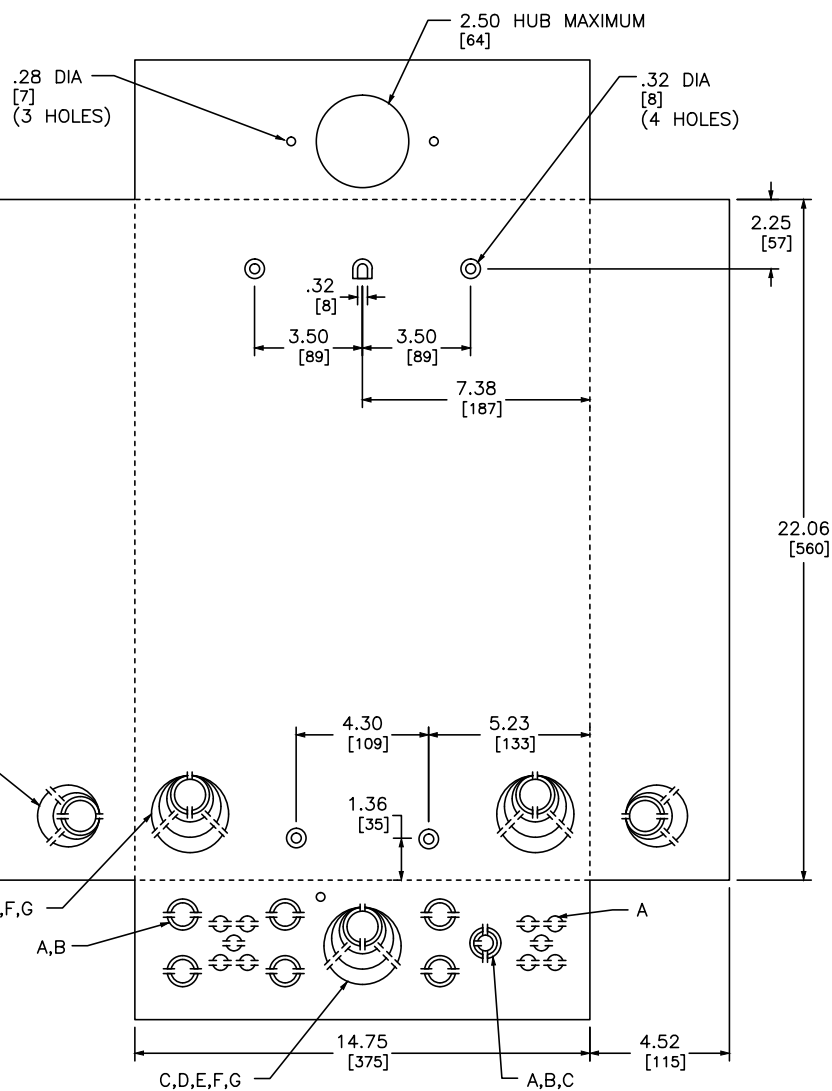

| KNOCKOUTS |     |     |      |      |      |      |      |
|-----------|-----|-----|------|------|------|------|------|
| SYMBOL    | A   | B   | C    | D    | E    | F    | G    |
| IN        | .50 | .75 | 1.00 | 1.25 | 1.50 | 2.00 | 2.50 |
| MM        | 13  | 19  | 25   | 32   | 38   | 51   | 64   |



HOM2040L125PRB



HOM2040M100PRB

DUAL DIMENSIONS: INCHES  
MILLIMETERS

| CATALOG NUMBER                   | MAXIMUM SYSTEM VOLTAGE | MAINS AMPERE RATING | SPACES | MAXIMUM NUMBER OF SINGLE POLE CIRCUITS | MAIN WIRE SIZE AWG AL/CU |
|----------------------------------|------------------------|---------------------|--------|----------------------------------------|--------------------------|
| HOM2040L125PRB<br>HOM2040M100PRB | 120/240 VAC<br>1Ø 3W   | 125<br>100          | 20     | 40                                     | #6-2/0 AL<br>#6-1 CU     |

NOTES:  
FINISH - GRAY BAKED ENAMEL ELECTRODEPOSITED OVER CLEANED PHOSPATIZED STEEL.  
UL LISTED - FILE E-6294  
NEUTRALS - INSULATED GROUNDABLE.  
WHEN MOUNTING THESE LOAD CENTERS, ALLOW 1.25/[32] INCHES OF CLEARANCE ON HINGED SIDE FOR THE DOOR TO OPEN.

HOMELINE LOAD CENTERS  
RAINPROOF NEMA TYPE 3R ENCLOSURE  
SIDE HINGED  
OUTDOOR



by Schneider Electric

DWG# PWFDS-SYRS-0071  
NO.