Assembly Instructions

Caution: You must read this before you proceed

Care & Maintenance



Not for commercial use. For residential use only.



 Furniture may scratch floors. We recommend using furniture pads to protect your floors.



Do not put hot items directly on furniture surface.



Do not clean furniture with harsh cleansers or polish.



Do not place furniture under direct sunlight.



Do not place furniture near heating or cooling vents.



 Do not write on furniture without a padded barrier to protect the surface.



• Do not place furniture outside . For indoor use only.



 Stains may be removed with mild soap solution and damp cloth.




Children should not climb or jump on the furniture.



 Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in Seat frame for hardware packs and legs. Sets often ship in multiple boxes and may arrive a day or two apart.

BARSTOOL

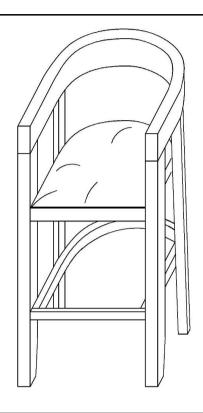

Parts List


Label	Picture	Description	QTY
А		Left front leg	1
В		Left hind leg	1
С		Right hind leg	1

D		Right front leg	1		
E		Armrest	1		
F		Seat cushion	1		
G		Bottom frame	1		
Hardware					
Label	Picture	Description	QTY		
Label ①	Picture	Description Allen Wrench (5mm)	QTY 1		
Label ①	Picture	Allen Wrench	QTY 1 7		
1		Allen Wrench (5mm) Short Bolt	1		
2		Allen Wrench (5mm) Short Bolt (M8x45mm) LONG Bolt	7		
① ② ③		Allen Wrench (5mm) Short Bolt (M8x45mm) LONG Bolt (M8x83mm) Spring Washer	7		

7	Screw (Ф9x45)	5
8	Screwdriver (not provided)	1

Assembly Preparation

Before Beginning Assembly:

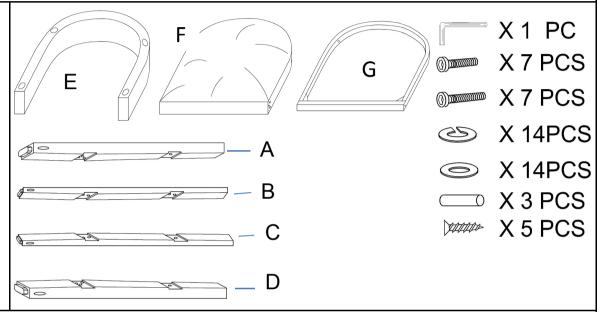



Read instructions, cover to cover-



· Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-




Assemble on a clean non-marring surface (packing foam)-




Save all packaging until finished-


Assembly Steps

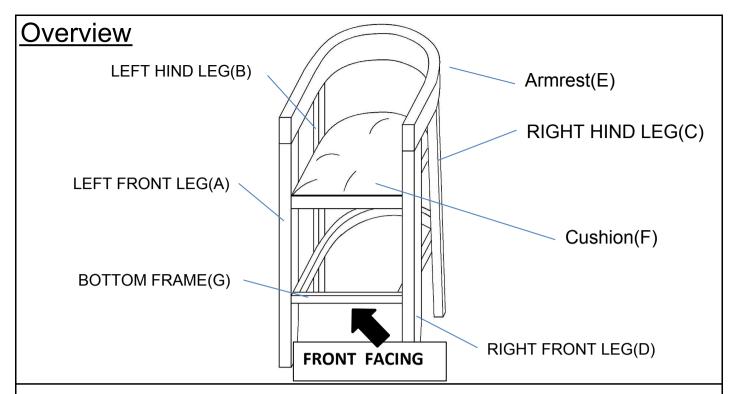

This Barstool has multiple parts and may require up to some 30 minutes to assemble. To give you an overview of the Barstool parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

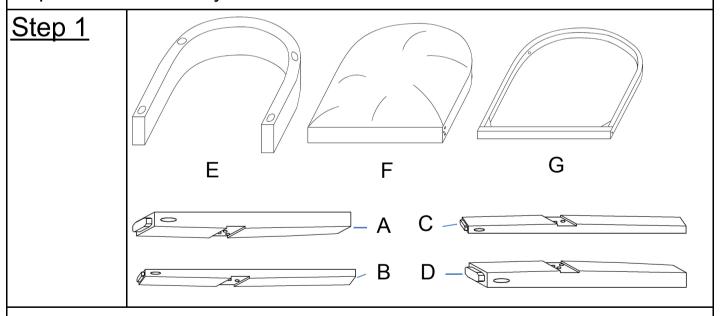


Step 2

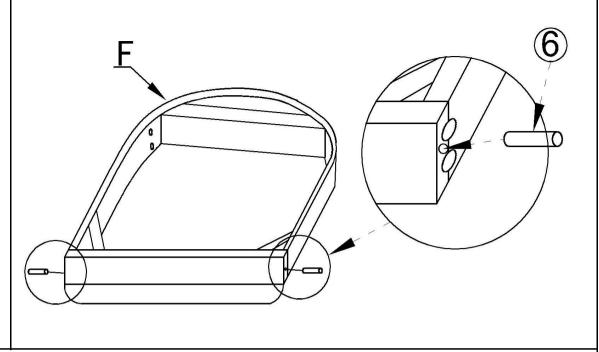


As shown in the picture, place the Wooden tenon (③) in the wooden tenon hole on the side of the Seat cushion (F). Place on a clean soft surface to avoid scratches or damage to the product.

Step 3

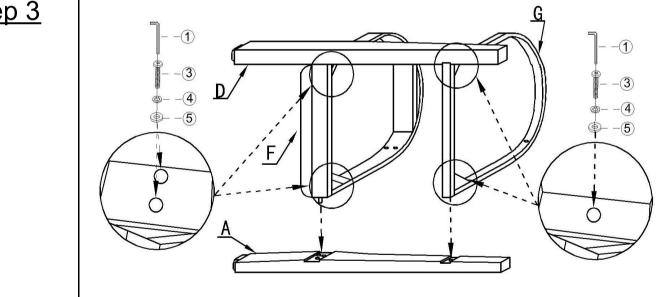


First of all, put the Left Front Leg (A) and Right Front Leg (D) on the Seat cushion (F) and the Bottom frame (G), connect with the wooden tenon, and then use Allen Key(1), LONG Bolts (3), Spring pad (4), Flat pad (5) to fix the Leg (A), Leg (D). Do not tighten the bolts as shown.

Step 4

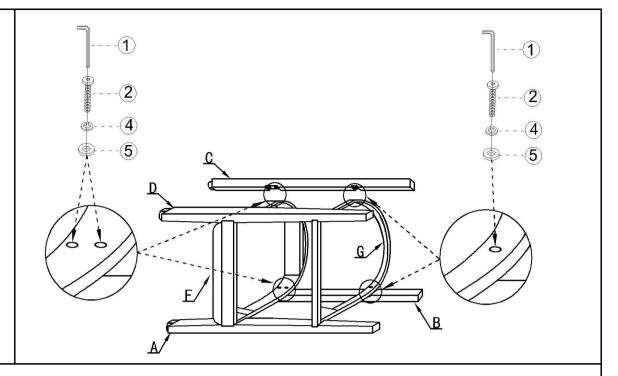


Left Hind Leg (B), Right Hind Leg(C) on the Seat cushion (F) and the Bottom frame (G), and then use Allen Key (1), Bolts (2), Spring Washer (4), Flat Washer (5) the Left Hind Leg (B), Right Hind Leg(C) fixed Legs. Do not tighten the bolts as shown.

Step 5

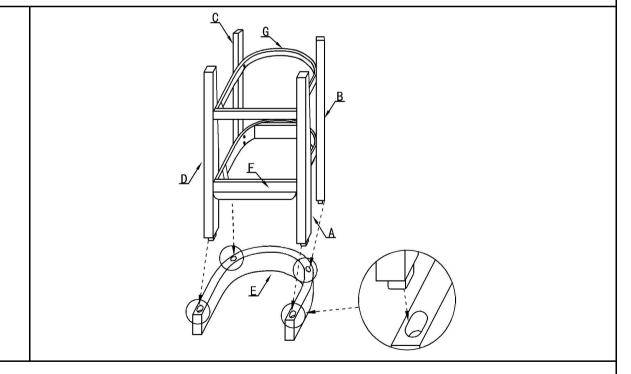

Insert the tenons on the legs (A), (B), (C) and (D) into the tenon slots of the Armrest (E), as shown in the picture.

Step 6

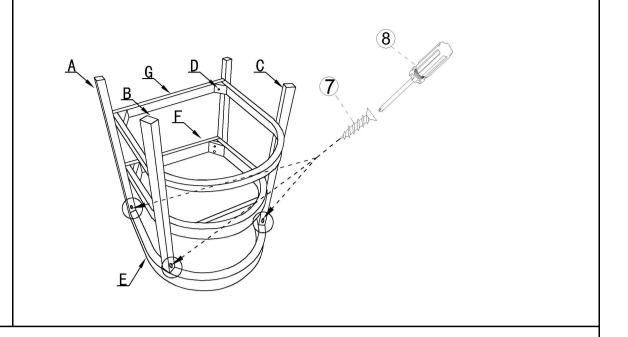

As shown in the picture, fix the Leg (A), (B), (C), (D) and Armrest (E) with Screwdriver (③) and Screw (⑦). Finally, tighten all the Screws and Bolts.

NOTE: The screws must be fastened!

Step 7 Test again If wobble 30cm 50cm

Place the Barstool on a level Surface to check for wobbles.

If it wobbles, lift the Barstool some 30cm to 50cm high from the ground.

Keep your feet and toes well away from the drop zone.

Drop the Barstool freely and vertically, with all four legs hitting the ground at the same time.

This Drop Test will help to ensure that all Bolts and gaps reach full alignment status.

Test again for evenness on a Level Surface.


If no wobbles are found, proceed to tighten all the Bolts.

When tightening the Bolts, tighten sequentially.

Do not fully tighten any Bolt fully and then move on towards the next one.

This may cause the frame to warp.

If there are still wobbles, loosen the Bolts and execute this same drop test.

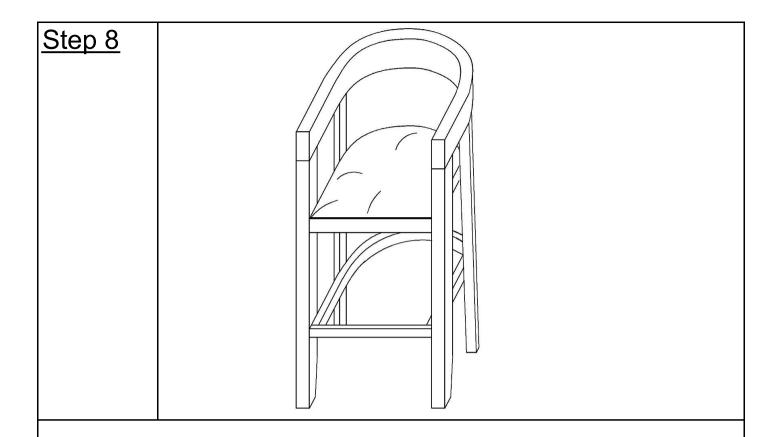

CAUTION 1: When tightening these screws, tighten sequentially.

If there is still wobbles, loosen the screws and execute this same process.

Ensure all screws are fully locked into position.

Caution 2: This can only be used on a flat, level surface.

Your Barstool is ready for use.

This Barstool can only be used on a flat, level surface.