

Ealing[™] Pull-down kitchen sink faucet with soap/lotion dispenser K-R28703-SD

Features

- Two-function pull-down sprayhead allows you to switch from aerated stream to Sweep[™] spray
- Sweep[™] spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean
- ProMotion[™] technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup
- High-arch spout offers vertical clearance for tall cookware and pitchers
- Single lever handle makes adjusting water temperature easy.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- Box includes: Assembled faucet, supply lines, soap/lotion dispenser, and escutcheon plate
- DockNetik[™] secure docking system locks sprayhead into place when not in use

Material

- Premium metal construction for durability and reliability
- Select KOHLER finishes feature ScratchShield[™] technology which withstands even the toughest daily use

Installation

- Installs with 1-, 2-, 3-, or 4-hole sinks
- Flexible supply lines and quick-connect fittings simplify installation
- Longer shank works with countertops up to 21/2" inches thick and is easy to install.





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.



Ealing™

KOHLER, Faucets

Pull-down kitchen sink faucet with soap/lotion dispenser K-R28703-SD

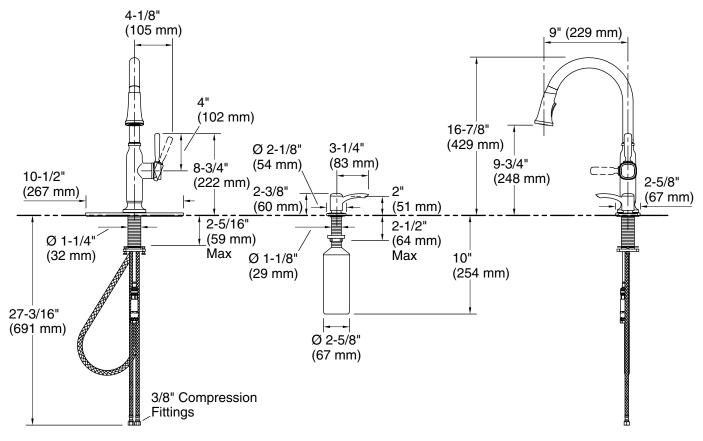

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 9-15/16" (253 mm)

Notes

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

