

EVOLUTION™ CORNER

Comfortable two person design with dual back support positions, integral seat and installed grab bar. **Includes factory installed E-Z-Install™ Whirlpool Heater.**

☐ **6060V (specify color)**

- Acrylic with fiberglass reinforcement
- 2.0 HP self-draining pump/motor
- Ten flow adjustable jets including:
 - Two adjustable Comfort Jets™ Hi Flo
 - Eight adjustable Comfort Jets™
- Three silent air volume controls
- Side-mounted On/Off control
- Complete factory installed and tested whirlpool system

☐ **6060VC (specify color)**

- Same as above with the EverClean™ whirlpool system featuring Antimicrobial AlphaSan®

Nominal Dimensions:

54-1/2" x 54-1/2" x 21-1/2"
(1384 x 1384 x 546mm)

Installed Size:

76-3/4" x 65-3/8" x 21-1/2"
(1949 x 1661 x 546mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS



Components Required:

- ☐ Bath Filler*: (specify finish)
- ☐ Bath Drain: 1573.272 Symphony Drain (specify color)


Custom Accessories Available:

- ☐ Corner Apron: CORNER-APRON (specify color)
- ☐ Tile Bead Kit: TILE-BEAD

* See American Standard Faucet Selector

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

NOTE: E-Z-Install™ Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

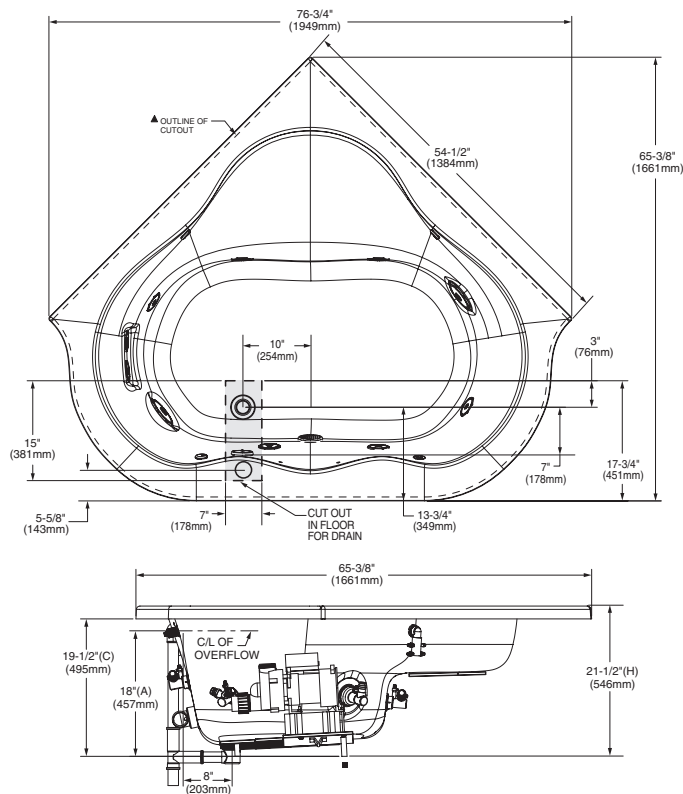

DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS Z124.1 AND A112.19.7.

GENERAL SPECIFICATIONS FOR 6060V WHIRLPOOL

INSTALLED SIZE _____ 76-3/4 x 65-3/8 x 21-1/2 In. (1949 x 1661 x 546mm)
 WEIGHT _____ 108 Lbs. (49 Kg.)
 WEIGHT w/WATER _____ 824 Lbs. (374 Kg.)
 GAL. TO OVERFLOW _____ 86 Gal. (325 L)
 WHIRLPOOL MIN. OPERATING VOL. _____ 71 Gal. (269 L)
 BATHING WELL AT SUMP _____ 48 x 26-1/2 In. (1219 x 673mm)
 BATHING WELL AT RIM _____ 63 x 50 In. (1600 x 1270mm)
 WATER DEPTH TO OVERFLOW _____ 15 In. (381mm)
 FLOOR LOADING _____ 24 Lbs./Sq.Ft. (116 Kgs./Sq.m)
 (PROJECTED AREA)

WHIRLPOOL ELECTRICAL SPECIFICATIONS

PUMP _____ 2.1 HP, 14.4 AMPS, 120V.
 E-Z INSTALL WHIRLPOOL HEATER _____ 12.0 AMPS, 120V.

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 2-WALL TILING BEAD KIT No.TILE-BEAD MUST BE ORDERED SEPARATELY.

▲ CUTOUT TEMPLATE PROVIDED IN SHIPPING BOX. MAY BE REQUESTED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.