



Shift®+ | K-21335

Round two-function handshower, 2.5 gpm

Features

- Advanced spray engine provides two spray experiences: full coverage and targeted massage
- Full coverage spray produces an encompassing spray ideal for everyday use
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Intuitive and easy push-button activation to switch between two sprays
- Ergonomic design is comfortable and easy to grip
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate
- Contains flow-regulating check valve for backflow prevention



Available Colors/Finishes

Color tiles intended for reference only.

- | | | |
|---|-----|--------------------------|
|  | SN | Vibrant Polished Nickel |
|  | AF | Vibrant French Gold |
|  | BV | Vibrant Brushed Bronze |
|  | BL | Matte Black |
|  | BGP | Vibrant Brushed Graphite |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 20:21 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

OBC compliant when installed to the specific requirements of these regulations.

OBC

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

OBC

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 2.5 gpm (9.5 l/min)

Flow:

Material

- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 20:21 - US-CA

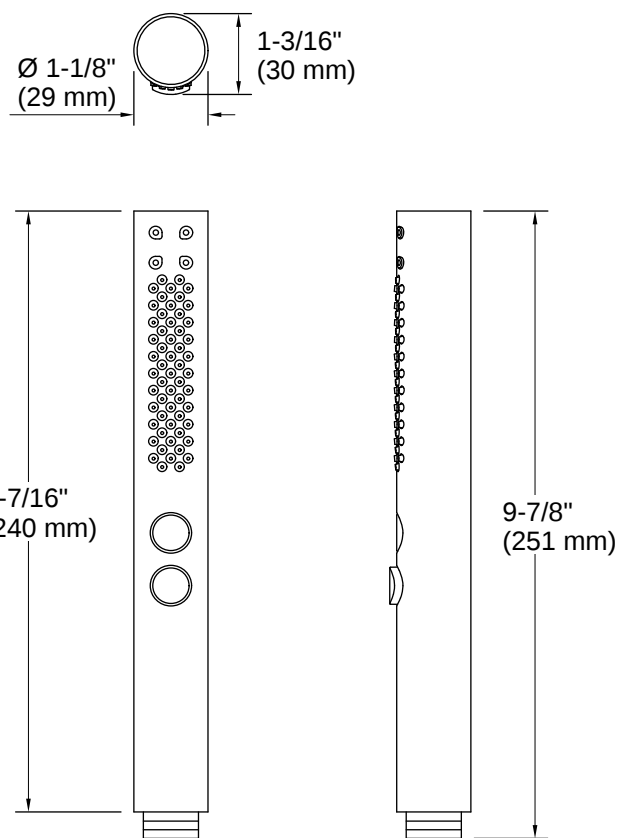

Installation

- Bracket or sidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 2.2 gal/min (8.3 l/min) or less.

Plumbing codes may require that a vacuum breaker be installed in-line to handshowers. Please consult local plumbing codes.

OBC compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

3-27-2026 20:21 - US-CA