MOEN

Buy it for looks. Buy it for life.®

FAUCET DESCRIPTION

- Versatile, hands-free convenience in the kitchen
 Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
- Powered by 6 AA batteries or optional AC power adapter
- Reflex[™] pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Hydrolock[®] quick connect installation
- Pulldown spray with 68" braided hose
- Valve flexible supply lines with 3/8" compression fittings
 Spout uses push-fit hose connections
- Spout uses push-fit hose connections
 High arc spout provides height and reach to fill or clean large
- Includes liquid soap dispenser

OPERATION

Lever style handle

- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi
CARTRIDGE

1255[™] Duralast[™] cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61 & 372
- Meets Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

WARRANTY

- · Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser
- 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations



Specifications


Delaney[™] MotionSense[™] Single Handle High Arc Pulldown Kitchen Faucet

Models: 87359E2 SERIES

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.



Close up view of Control Box

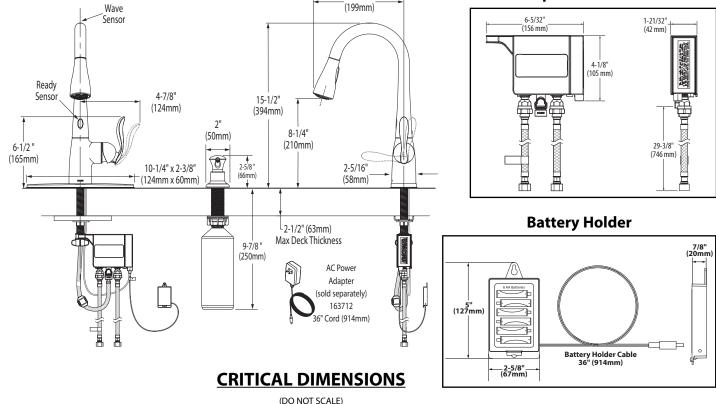

7-7/8"