

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

✉ If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers

HARDWARE INCLUDED



Fixture



Glass Shade




Hex Nut



Cap



Mounting Screws




Mounting Unit



Wire Nuts


*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

EXPLODED PARTS

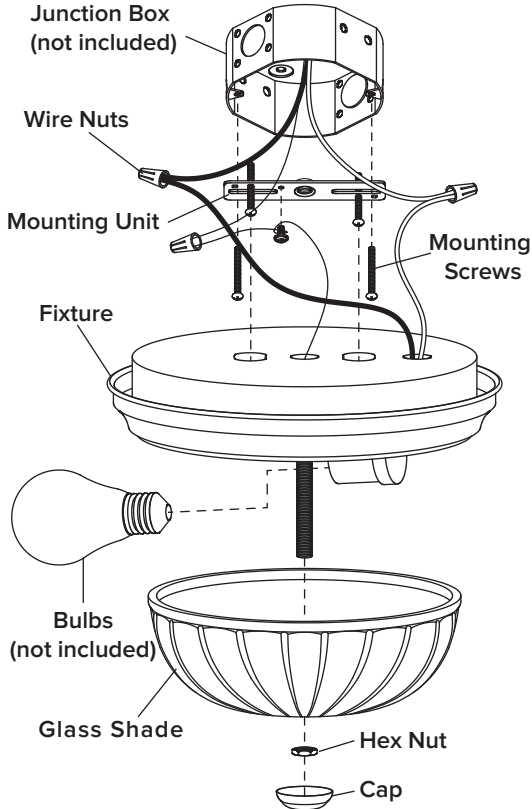



STEP 2

Disassemble the **glass shade** under the fixture by unscrewing **hex nut** and **cap**.

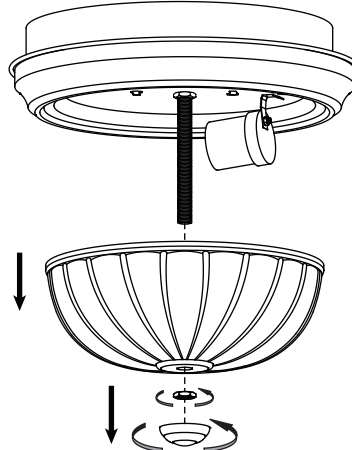


STEP 3

Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Next, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

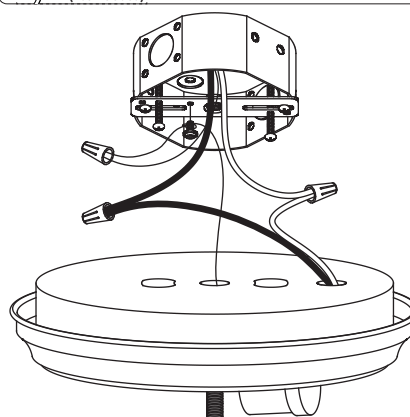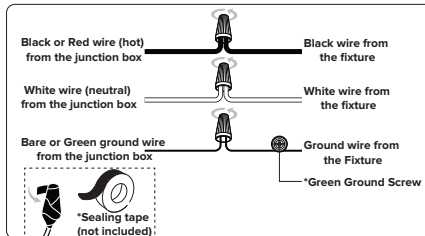


STEP 4

Attach the **fixture** to the **mounting unit** by inserting two fixture screws and rotating the **fixture** until it locks in place. Then tighten the fixture screws securely.

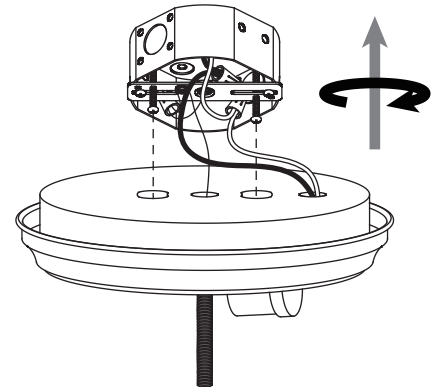


STEP 5

Install bulb (not included)

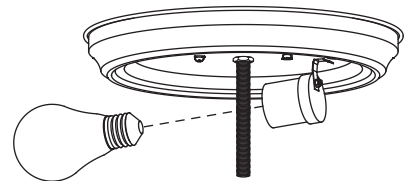

STEP 6

Place the **glass shade** onto the **fixture**, then secure with **hex nut** and **cap**.

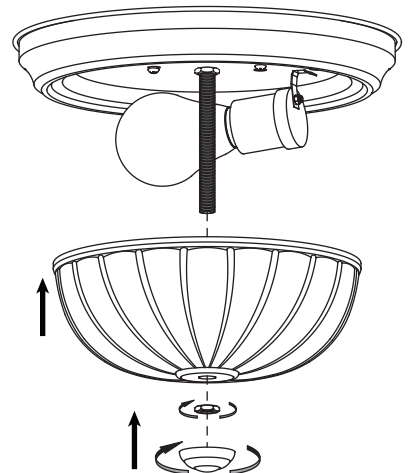

INSTALLATION

STEP 1

Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).

