

# PARTS & ASSEMBLY SHEET

Fixture Name: SMYTH 2073-M1L GMT










This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the Parts List and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

## PARTS LIST

Company Name: \_\_\_\_\_  
below to be filled out by retailer

Co Account#: \_\_\_\_\_

Mounting Strap Φ102 mm 1ea		Green Screw G8/32*H8 mm 1ea		Mounting Screws H32 mm 2ea H38 mm 2ea	
Wire Connectors Orange 3ea		Hex Nut G5/32*H4 mm 2ea		Deco Nut Φ12*12 mm 2ea	
Canopy L126*W126*H25 mm 1ea		12" Rod Φ12*L305 mm 3ea		6" Rod Φ12*L152 mm 1ea	

Part Needed \_\_\_\_\_ Quantity \_\_\_\_\_

Part Needed \_\_\_\_\_ Quantity \_\_\_\_\_

Reason why (missing, scratched, broken glass, bent, bad finish)

Comments \_\_\_\_\_

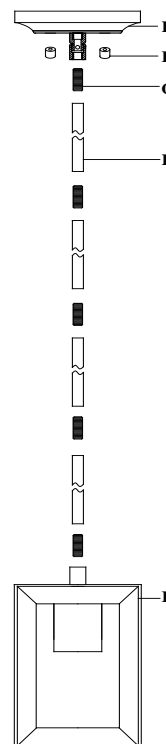
## FIXTURE ASSEMBLY INSTRUCTIONS

**Read and review installation instruction sheet before assembling the fixture**

1. Measure to determine the correct number of rods needed for proper hanging height. There are 3 optional 12" rods and a 6" rod included.
2. To shorten the fixture, trim the wires to the desired length and add at least 8-10 inches. You must use at least the 6" rod.
3. To lengthen the fixture, add additional rods. (ROD-12 CDB) is available. To purchase additional rods, please contact the retailer.
4. Pull the fixture's wires through the rods.
5. Place Washer (G) between Rod (H) and Frame (I). Thread Rod (H) into Frame (I) until tight.
6. Place Washer (G) between each rod and thread until tight.
7. Feed the fixture wires through Canopy (E) and pull the wires until taut.
8. Thread Canopy (E) into Rod (H) until tight.

2073-M1L GMT

Fig.1



# INSTALLATION INSTRUCTIONS

Fixture Name: SMYTH 2073-M1L GMT

Mini Pendant Light Fixture

## WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

### HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton as well as the yellow parts bag. Check that all parts are included as shown in the illustrations and the Parts and Assembly Sheet.
2. Shut off power at the circuit breaker and completely remove the old fixture from ceiling, including the old mounting strap.
3. The Mounting Strap (B) contains several pairs of threaded holes, find the pair of holes that matches the holes spacing in your fixture canopy (E). Thread Fixture Mounting Screws (A) half way into the Fixture Mounting Strap (B).
4. Place the Mounting Strap (B) over the Junction Box so that Mounting Screws (A) are vertical or horizontal, as required by the fixture type.
5. Attach the Fixture Mounting Strap (B) to the Junction Box using Mounting Screws (C). Tighten the screws securely with a screw driver.

### CONNECTING THE WIRES (Fig.2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
7. Ground Wire Connection: Connect the fixture ground wire to the supply ground wire (this usually has green insulation) with wire connector. If there is no supply ground wire at ceiling junction box then attach the fixture ground wire securely onto green grounding screw located at mounting bar.

**NOTE: Twist the wires together in the same direction you twisted the wire connector onto the wires.**

8. Tuck these wire connections neatly into the Junction Box.

### FINISHING THE INSTALLATION (Fig.3)

9. Place Canopy (E) over Mounting Screws (A) and secure Canopy (E) against the wall by threading Deco Nuts (F) over Mounting Screws (A) until tight as shown on Fig.3.
10. Install the light bulb in accordance with the fixture's specifications.

**YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.**

Fig. 1

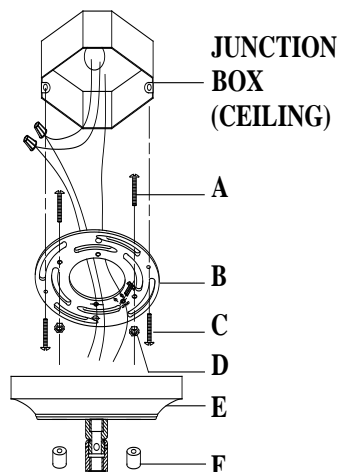


Fig.2

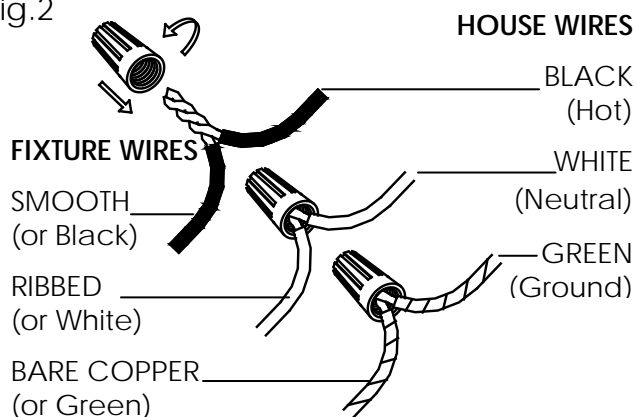


Fig.3

