



Battery Operated Carbon Monoxide Alarm

Model 9CO5-LP

Battery Operated (3AA's included)

Provides protection during power outage.


Green Alarm LED

Red Power LED

Test/Reset

Tests CO alarm circuit operation and allows you to immediately silence the alarm.

**Alerts user to replace CO alarm
after 7 years of operation**

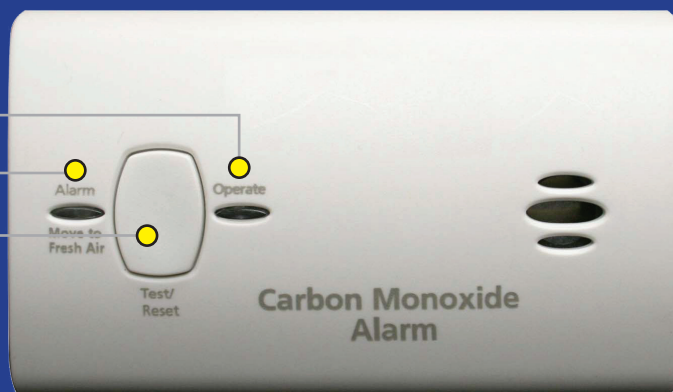

Description

The Kidde 9CO5-LP battery operated carbon monoxide alarm utilizes sophisticated electronic components to protect you and your family from the dangers of carbon monoxide. This alarm includes a slide-out battery door that gives immediate access to the batteries and a safety feature that makes it difficult to close the door without the batteries being installed. Inside cover of battery door features quick reference guide for what to do in case of an alarm. This easy-to-install alarm is suitable for all living areas and has a 7-year life and a 5-year limited warranty.

Consumer Benefits

The Kidde 9CO5-LP provides you and your family with a loud warning signal against the dangers of elevated carbon monoxide levels in your home. The battery operated CO alarm provides continuous monitoring of CO levels, even during power outages when AC-only units are not providing protection.

Features and Benefits

- **Battery Operated (3AA's included)** – Provides protection during power outage.
- **Battery Lockout System** – Deters covering battery compartment without installation of batteries.
- **Slide-out Battery Door Cover** – Gives immediate access to batteries.
- **Test/Reset Button**
 - Tests the unit for proper operation
 - Resets the Carbon Monoxide Alarm
- **Low Battery Signal** – Alerts user when the battery needs to be replaced.
- **Green LED** – Flashes every 30 seconds to indicate the unit is operating properly. The green LED will also flash before a CO reading is taken and when any button is pressed.
- **Red LED** – When a dangerous level of carbon monoxide is detected the red LED will pulse and a loud alarm pattern will sound. The carbon monoxide alarm pattern is 4 short beeps, followed by 5 seconds of silence, followed by 4 short beeps with a corresponding red LED flash. This cycle will continue for 4 minutes and then change to 1 cycle every minute until the device is reset or the CO is eliminated.



Architectural and Engineering Specifications

The carbon monoxide alarm shall be Kidde Model 9CO5-LP or approved equal. It shall be powered by three (3) AA batteries (included). The unit shall have a snap open cover that allows immediate access to batteries. The temperature operating range shall be between 40°F and 100°F (4°C and 38°C) and the humidity operating range shall be 5% - 95% relative humidity.

The CO sensor shall be of a fuel cell design and shall meet the sensitivity requirements of Underwriters Laboratories UL2034 Single and Multiple Station Carbon Monoxide Alarms.

The alarm can be installed on the surface of any wall or ceiling following the UL/NFPA/Manufacturer's recommended placement guidelines. The alarm shall include a battery lockout system that deters closure of battery door without using three batteries.

The alarm shall include a test button that will electronically simulate the presence of CO and cause the unit to go into alarm. This sequence tests the unit's electronics to ensure proper operation.

Per UL 2034 requirements, the CO sensor will not alarm to levels of CO below 30 ppm and will alarm in the following time range when exposed to the corresponding levels of CO.

70 ppm CO Concentration	60 – 240 minutes
150 ppm CO Concentration	10 – 50 minutes
400 ppm CO Concentration	4 – 15 minutes


The unit shall incorporate 2 LED's. A green LED will flash once every 30 seconds to indicate the alarm is operating properly when power is present. A red LED will pulse to indicate carbon monoxide has been detected until the device is reset or CO is eliminated.

The alarm shall include a piezoelectric horn that is rated at 85 decibels at 10 feet. When the unit detects carbon monoxide, the alarm pattern will be four (4) short beeps – followed by five (5) seconds of silence – followed by four (4) short beeps with a corresponding red LED flash.

It shall also include a 5-year manufacturer's limited warranty.

Technical Specifications

Power Source:	3 AA Batteries
Sensor:	Electrochemical
Audio Alarm:	85dB at 10ft
Temperature Range:	40°F (4.4°C) to 100°F (37.8°C)
Humidity Range:	5%-95% relative humidity (RH)
Size:	4.5" L x 2.75" H x 1.5" D
Weight:	.5lb
Wiring:	None
Interconnects:	No
Warranty:	5 year limited

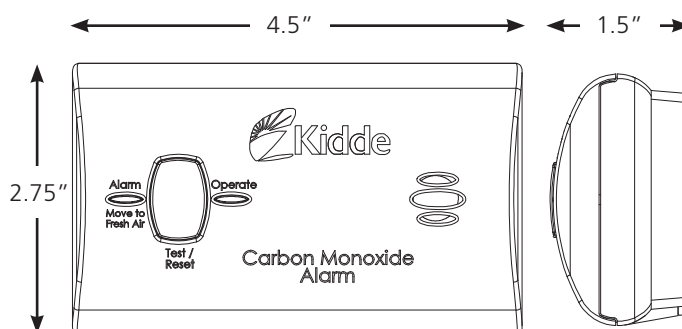

Ordering Information

Part Number	UPC	Pack Quantity	Dimensions	I 2 of 5	Weight	Items/Skid
21008872	0-47871-08872-0	Cut Case (3 units)	6.2" x 7.8" x 11.6"	100-47871-08872-7	2.55lb	387
21008900	0-47871-08872-0	Cut Case (20 units)	15.75" x 20.5" x 11.5"	300-47871-08872-1	17.7lb	360
21008908	0-47871-08908-6	Bulk Pack (6 units)	6.25" x 10.75" x 4"	100-47871-08908-3	5.5lb	280
21008899	0-47871-08872-0	Cut Case (8 units)	8" x 17.75" x 11.25"	200-47871-08872-4	7.12lb	288
21008912	0-47871-08912-3	Cut Case (3 twin pack units)	10.5" x 10.75" x 6.5"	100-47871-08912-0	4.62lb	252
21008904	0-47871-08872-0	Display (360 units)	40" x 48" x 48"	600-47871-08872-2	375lb	360
21008930	0-47871-08930-7	W/Smoke Model i9060 Cut Case (3 twin pack units)	6.5" x 10.75" x 10.5"	100-47871-08930-4	5lb	252



1016 Corporate Park Drive
Mebane NC 27302
1-800-880-6788
www.Kidde.com

Distributed by: