

QUESTIONS OR CONCERNS CONTACT CANARM AT:
1-800-265-1833 (English) 1-800-567-2513 (French)
Monday through Friday 8:00 AM to 5:00 PM E.S.T.



"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"
"READ ALL INSTRUCTIONS"

**"IMPORTANT SAFETY
INSTRUCTIONS"**
"SAVE THESE INSTRUCTIONS"

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Pliers



Wire Cutters



Wrench

Wiring supplies
as required by
the Canadian
Electrical Code
and/or the
Quebec
Electrical code


SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.


NOTE: Product May Not Look Exactly As Shown In Figures.

INSTALLATION:

STYLE#1



STYLE#2



1. Refer to the mounting bracket style that matches the bracket that is included with your fixture. Attach the mounting bracket to the outlet box using electrical box screws (not included).


Style#1 - Loosen hex nut "A" and "B". Adjust stud so it clears the fixture once assembled. Hold in place with "A" and lock in place with "B".

Style#2 (Threaded holes) Loosen "B". Adjust stud to desired length and lock in place with "B".

2. Screw lower downrod into the fixture. Install swivel to the rod, ensuring that the sleeve is at the swivel. Tighten the locking nut to secure rod to the fixture.

Note: Remove fixture pan, plate and rods if required (if you wish to change the downrod length). Install the length of rod that is required by threading wire through the rod and securing it to the fixture.

3. Connect the ground wires (bare copper or green) from your fixture to the ground wire (bare copper or green) or ground screw in the electrical outlet box. Connect the black wire (or wire with marking) from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.

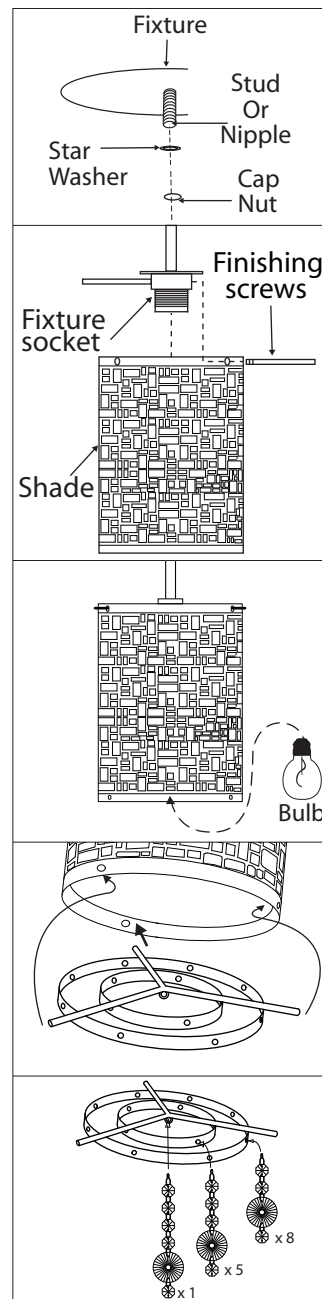

4. Once connections of wires are completed, carefully tuck wires and wire nuts into the outlet box making sure no bare wire (on the black and white) is visible at the wire nuts. Install the light fixture to the wall by aligning the hole(s) in the fixture with the studs or nipple. Secure in place with cap nut(s) and star washer(s).

5. Remove the finishing screws that are already on your fixture. Position glass in place and secure with finishing screws.

6. Install proper bulb type and wattage (not included).

7. Insert the hanger as shown.

8. Hang the lucite.