




# Technical Specifications

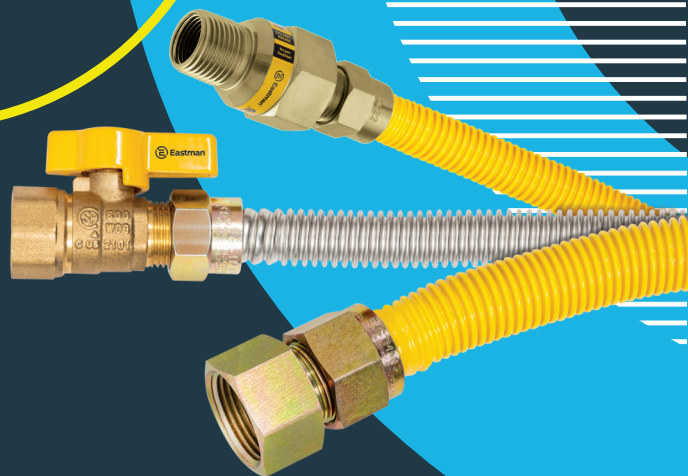

## Corrugated Stainless Steel

Provides superior flexibility over copper. Available with yellow and black epoxy coating for improved corrosion resistance. Easily identifiable as a gas connector.



## Many Configurations

Our connectors cover a range of connection types and BTUs up to 290,900.



## Easy to Install

Deep corrugations enhance flexibility.



## 100% Leak Tested

Factory tested for peace of mind.

## Materials

Tubing	Stainless Steel 304 (ASTM A240)
Coating	Yellow Epoxy / Black Epoxy / Stainless
Fittings	Zinc-Plated Steel S45C

## Specifications

Tubing Coating	-40° F to 150° F (-40° C to 65° C)
Fittings	0.5 psi

## Design Certifications And Approvals

ANSI Z 21.24 / CSA 6.10 Gas Appliances

ANSI Z 21.60 / CSA 6.16 Movable Gas Appliances

ANSI Z 21.74 / CSA 6.27 Outdoor Gas Appliances & Manufactured Homes

Commonwealth of Massachusetts Board of State Examiners (except 48", 60", 72")

City of New York-MEA #376-92-M



## Write in the Model Number

Refer to back for help

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------	----------------------	----------------------

Tube Size Tube Style Fitting 1 Fitting 2 Length

Job Name	Engineer / Architect:
Job Location:	Wholesaler:
Submittal Date:	Contractor:

# Selecting a Gas Connector

## Gas Connector Nomenclature



					Example					
					30	YE	51	VO	48	
Tube Size	Tube Style	Fitting 1	Fitting 2	Length	Tube Size	Tube Style	Fitting 1	Fitting 2	Length	

Tube Size	Tube Style	Fitting 1	Fitting 2	Length
10 3/8" OD	YE Yellow epoxy coated	50 1/2" MIP (tapped 3/8" FIP)	50 1/2" MIP (tapped 3/8" FIP)	12"
20 1/2" OD	BE Black epoxy coated	51 1/2" FIP	51 1/2" FIP	18"
30 5/8" OD	SS Stainless steel	52 3/8" MIP (tapped 1/4" FIP)	52 3/8" MIP (tapped 1/4" FIP)	24"
40 1" OD		53 3/8" FIP	53 3/8" FIP	30"
		54 3/4" MIP (tapped 1/2" FIP)	54 3/4" MIP (tapped 1/2" FIP)	36"
		55 3/4" FIP	55 3/4" FIP	48"
		56 1" MIP (tapped 3/4" FIP)	56 1" MIP (tapped 3/4" FIP)	60"
		57 1" FIP	57 1" FIP	72"
		61 1/2" FIP straight ball valve	61 1/2" FIP straight ball valve	
		63 3/4" FIP straight ball valve	63 3/4" FIP straight ball valve	
		71 1/2" FIP 90° ball valve	71 1/2" FIP 90° ball valve	
			V0 1/2" MIP (tapped 3/8" FIP) EFV	
			V1 1/2" FIP EFV	
			V2 3/8" MIP (tapped 1/4" FIP) EFV	
			V3 3/8" FIP EFV	
			V4 3/4" MIP (tapped 1/2" FIP) EFV	
			V5 3/4" MIP EFV	
			V6 1" MIP (tapped 3/4" FIP) EFV	
			V7 1" FIP EFV	

## BTU Capacities Chart

Capacities of Gas Connectors of Various Lengths in BTU/Hr for Natural Gas (Multiply by 1.6 for LP Gas)

OD (in)	ID (in)	Straight Length Capacity in BTU/HR							
		12"	18"	24"	30"	36"	48"	60"	72"
3/8"	1/4"	48,000	43,800	40,000	36,400	33,400	28,300	24,900	23,100
1/2"	3/8"	102,000	93,100	85,000	77,100	71,100	60,500	53,200	49,100
5/8"	1/2"	180,000	164,200	150,000	136,000	125,000	106,000	93,200	86,000
1"	3/4"			290,900	270,500	255,900	215,000	197,400	173,900

## AarmorBoost Excess Flow Chart

	3/8" OD	1/2" OD	5/8" OD	1" OD
Max flow capacity (BTU/h)	75,000	123,000	180,000	260,000
Max pressure drop @ max flow capacity (in. wc)	0.63	0.74	1.21	1.96
Flow capacity @ 5 in. wc pressure drop (BTU/h)	66,800	111,000	122,500	159,000
Trip flow rate @ 5 in. wc (BTU/h)	101,000	223,000	217,000	290,000
Max pressure drop @ trip flow (in. wc)	2.76	3.24	2.88	2.88

- \*Rated Trip Flow and Max Flow Capacity values are kBTU/h @ max. "w.c. PD (natural gas, 0.64 s.g., 1000 BTU/cu.ft.)
- A minimum of 5" w.c. inlet pressure is required with a maximum inlet pressure of 14" w.c. (1/2 psig).
- Installation orientation: Multi-poise (horizontal, vertical up, vertical down).
- EFV Type: EFVB (Bypass with automatic reset)

- Bypass rate: MAX 2.5 SCFH at 0.5 psi
- The maximum trip flow is 1.4 times the rated trip flow.
- Operating temperature: -40°F to 150°F (-40°C to 65°C)
- Reaction Temperature Range: 350°F to 425°F (176.7°C to 218.3°C)

For more information, please visit [ez-flo.net](http://ez-flo.net) Customer Service: 1-800-486-5256

