

### Features

- Advanced spray engine provides three alternative experiences: wide coverage, intense drenching, and powerful massage
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Powerful massage spray is a focused stream that targets sore muscles, or use as a utility spray to rinse kids, pets, and your shower
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup
- Single lever handle allows for both on/off activation and temperature setting

### Material

- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use
- Constructed with premium materials for durability and reliability.

### Technology

- Rite-Temp® technology automatically maintains water temperature within +/- 3°F for anti-scalding protection and precise control

### Water Conservation & Rebates

- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

### Adapters, Rough-in and Extension Kits

10350 Range: 3-1/2" (89 mm) -  
4-1/4" (108 mm)

### Recommended Products/Accessories

K-23723 Faucet cleaner



### Codes/Standards

ASME A112.18.1/CSA B125.1  
ASSE 1016/ASME A112.1016/CSA B125.16  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black

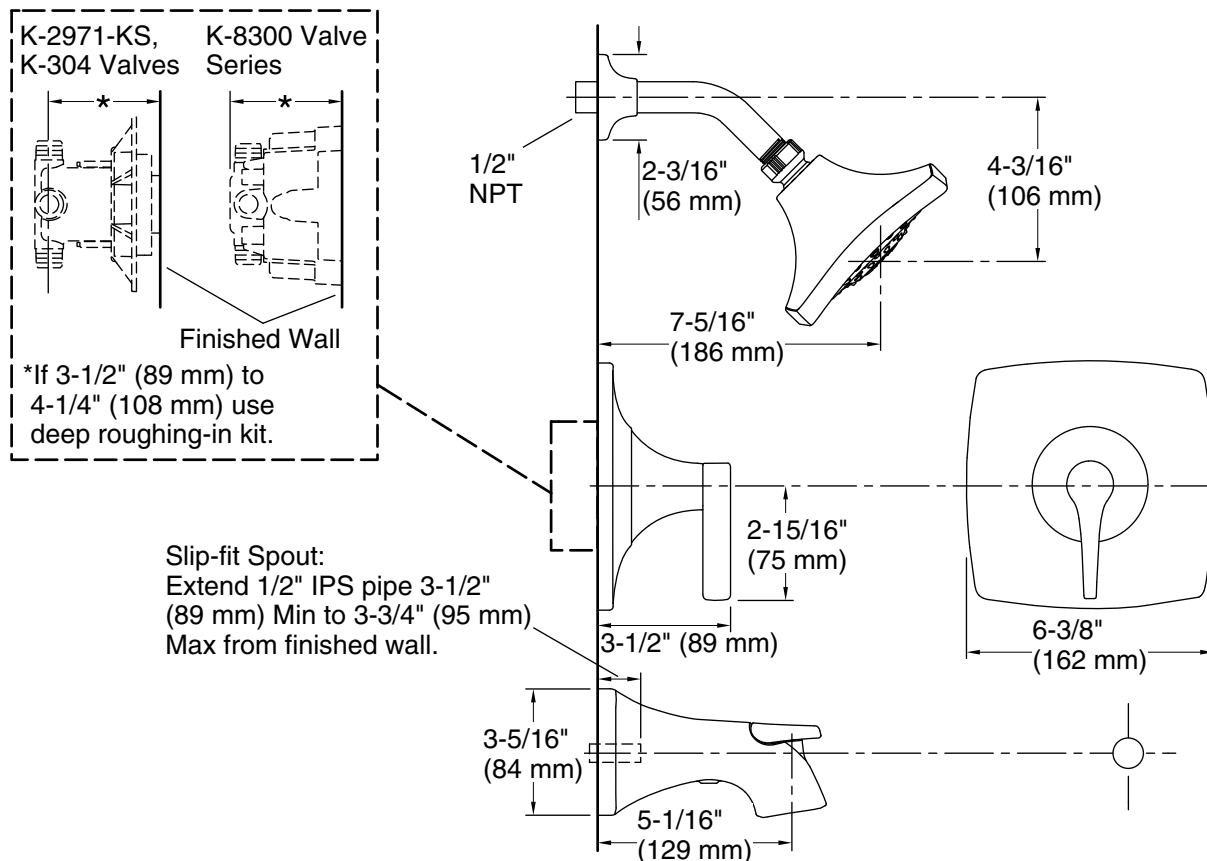

### Technical Information

All product dimensions are nominal.

#### Shower Valve:

Flow Rate (Max) @ 45 psi	5 gal/min (18.9 l/min)
Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Minimum (Operating) Pressure:	20 psi (1.4 bar)

Drain included: No

#### Showerhead/Body Spray:

Rated maximum flow:	1.8 gal/min (6.8 l/min)
Pressure:	80 psi (5.5 bar)

### Notes

For use with automatic compensating valves rated at 1.08 gal/min (4.1 l/min) or less.

Install this product according to the installation instructions.