

# INSTALLATION GUIDE




## **Packing Lists**

Be sure to check all packing materials carefully for small parts that may have come loose inside the carton during shipment. If parts are missing, contact us to obtain any missing parts.

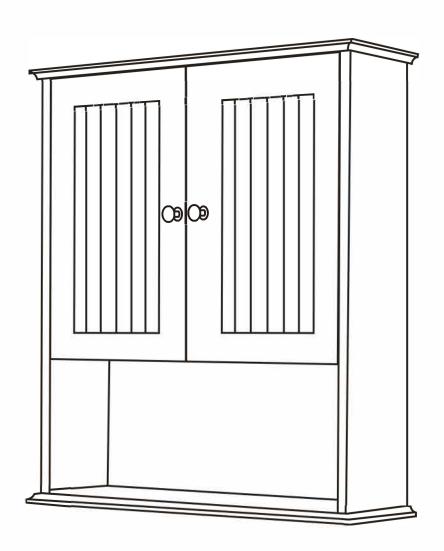

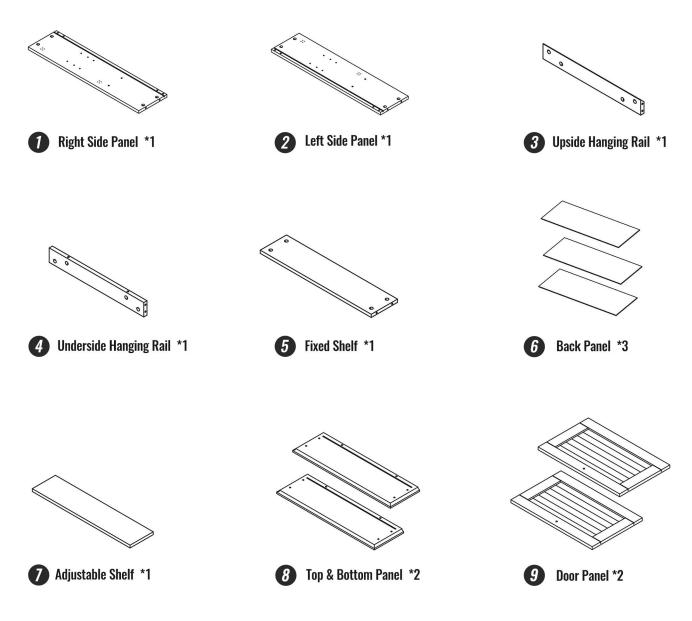

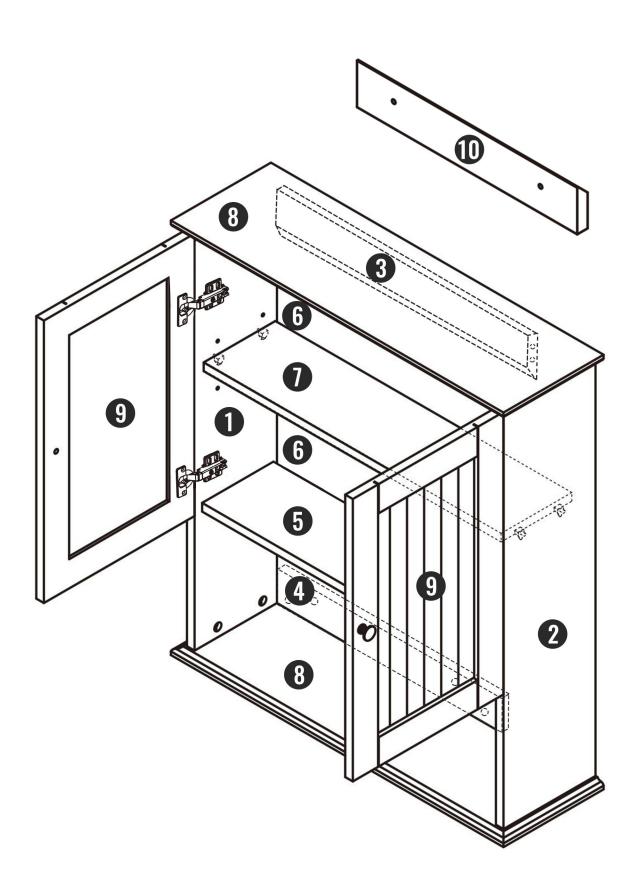

#### **Accessories**



Two in one screw \* 20



**f** Door hinge \* 4



**b** Eccentric gear \* 20



g Handle \* 2



**d** Tapping screw \* 24



h Expansion screw \* 2




€ Wooden pole \* 4




Panel support \*4


#### **Tools Required**










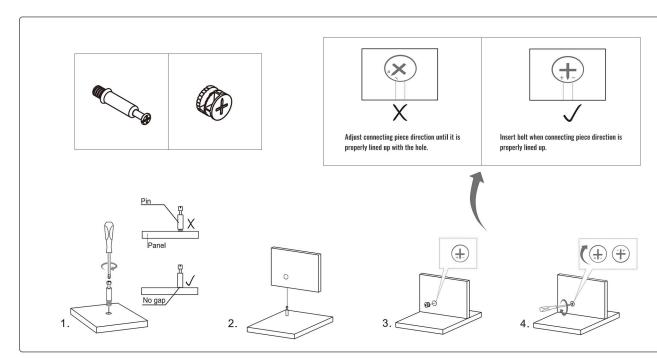






Install the Two in one screw, Wooden pole and Eccentric gear on Workpiece


















#### 2


#### Connect 3 to 1, 4 to 1.

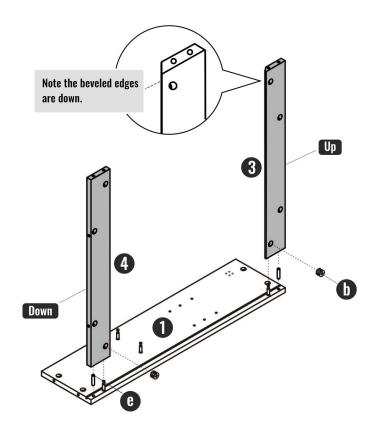






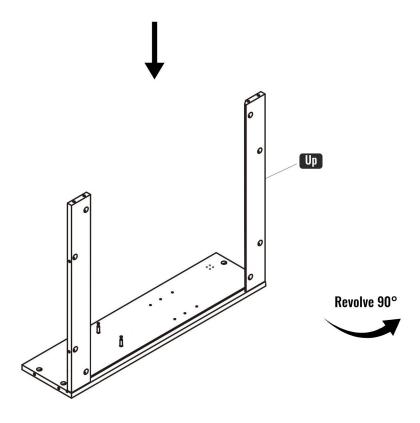

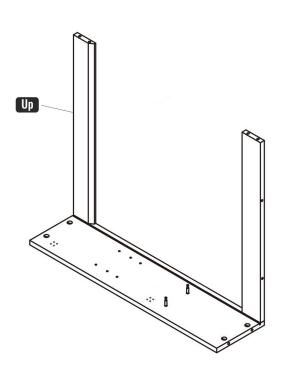


3


Connect 5 to 1.

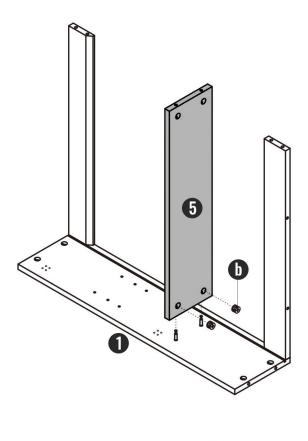



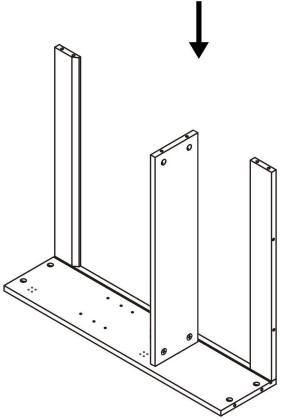




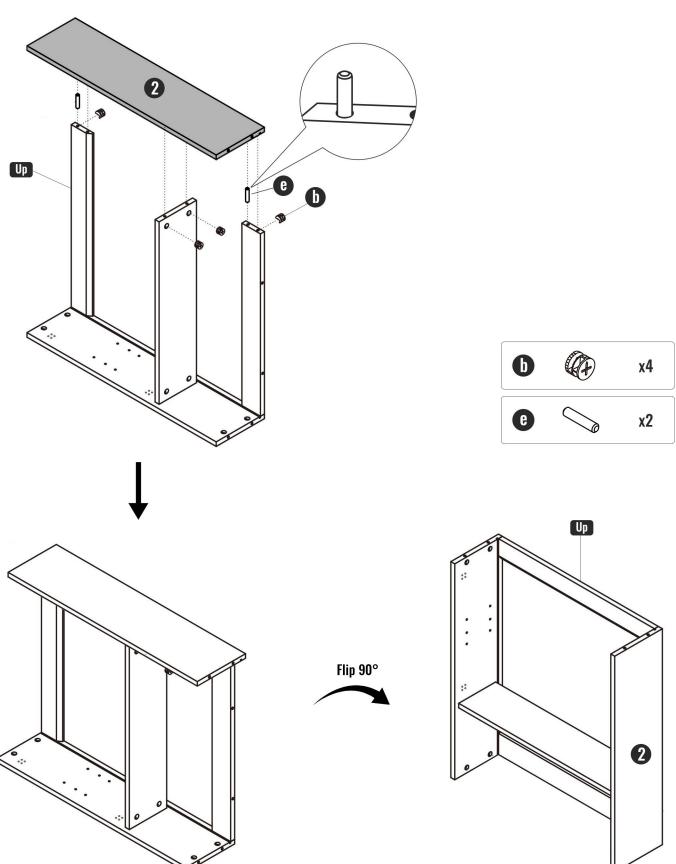

5


Install with the bottom panel  $\@3$ .

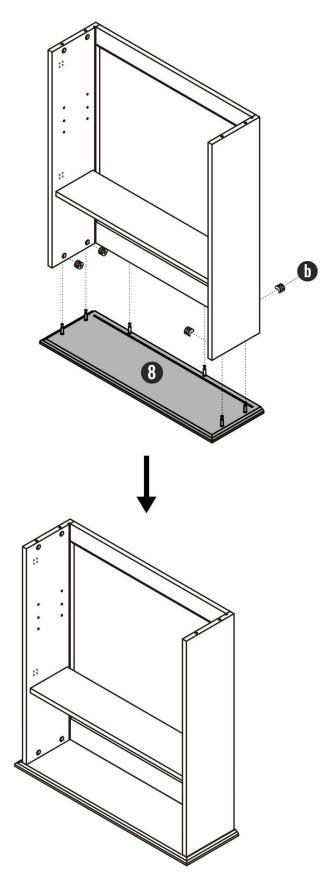





6

Insert 3 back panel 6.

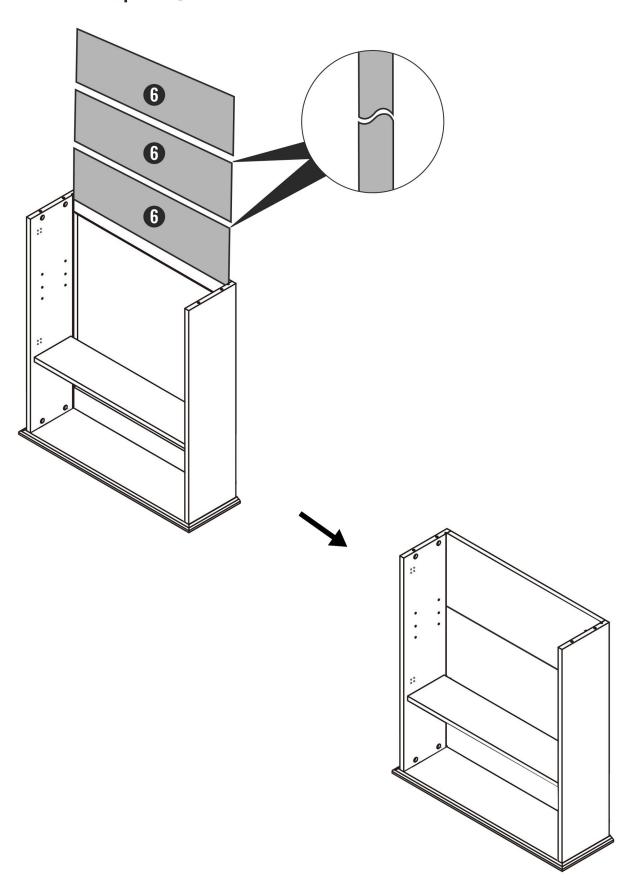

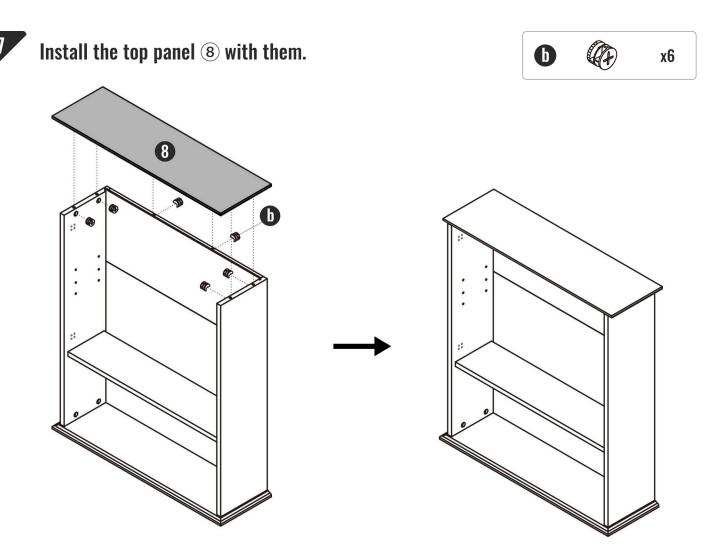


Fix the door hinges onto the doors 9.

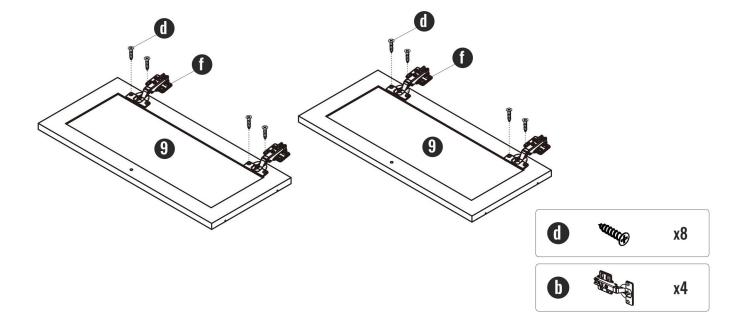

#### 9

#### Installation of cabinet doors and handles.

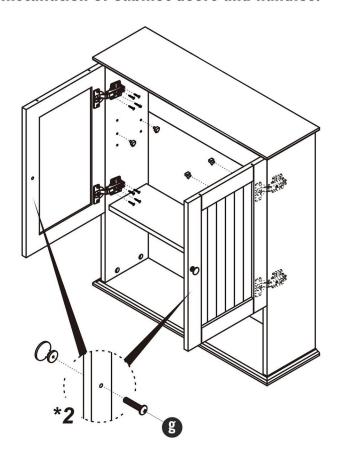






Tapping screw (lock the oval hole screws inside first to adjust the upper gap, after positioning, then lock the two screws at the front) Serew the screws on the hinge to get the doors perfectly fit.

#### [ Sketch Map For Adjusting Cabinet Door In Three Dimensions ]

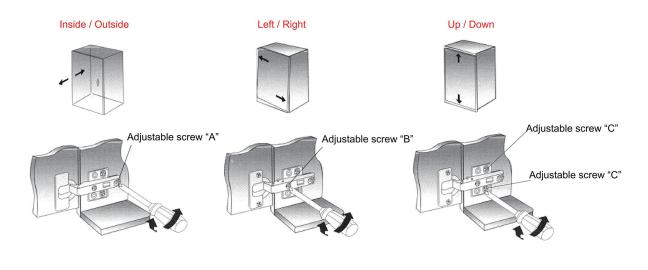

Front and rear adjustment in three dimensions. The clearance between door board and cabinet side board can be changed only by adjusting screw "A"


Adjustable screw "B"


Left and right adjustment in three dimensions


Vertical adjustment in three dimensions Verticality and clearance between top and bottom can be comected by adjusting screw "C" on hinge base board.

10

Install the Panel supports j on the cabinet,and put shelf  ${\ensuremath{ {\mathcal O}}}$  onto the Panel supports.

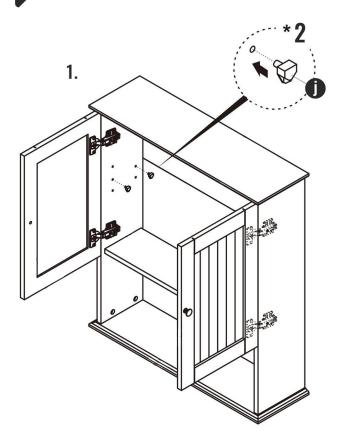

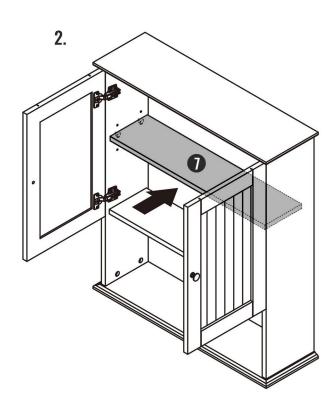

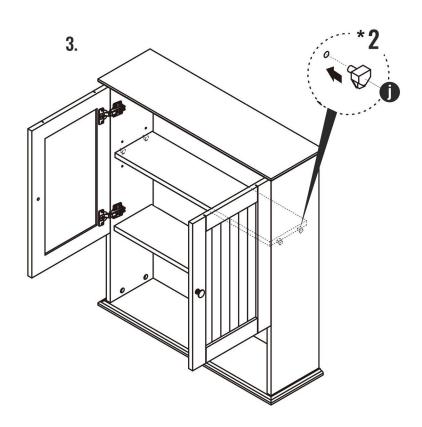






# Determine the desired mounting location, Fix the Wall Cleat on the wall and install the cabinet.

Note: Pay attention to the direction of the hanging panel (beveled edge upwards).

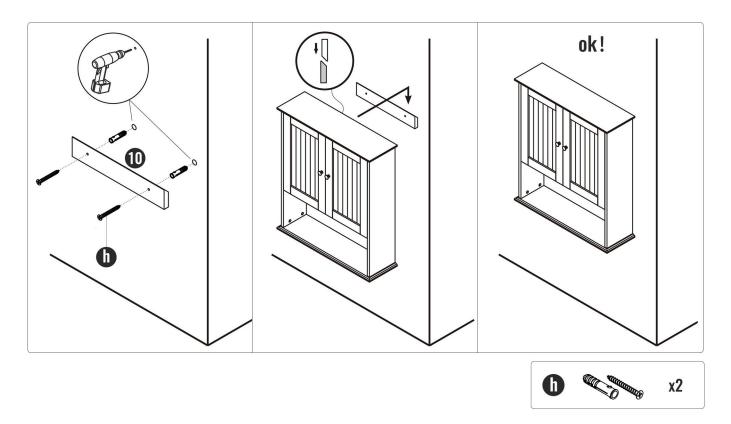

#### **Care and Maintenance**

- Cleaning with a dry cloth may be sufficient.
- For other stains or marks, wipe gently with a damp cloth.
- Do not use strong detergents or abrasive cleaners; they may damage the surface of the cabinet.
- As the product is sealed during transportation, please open the cabinet for several days after receiving the goods to ventilate the smell.