


Fixture Diagram

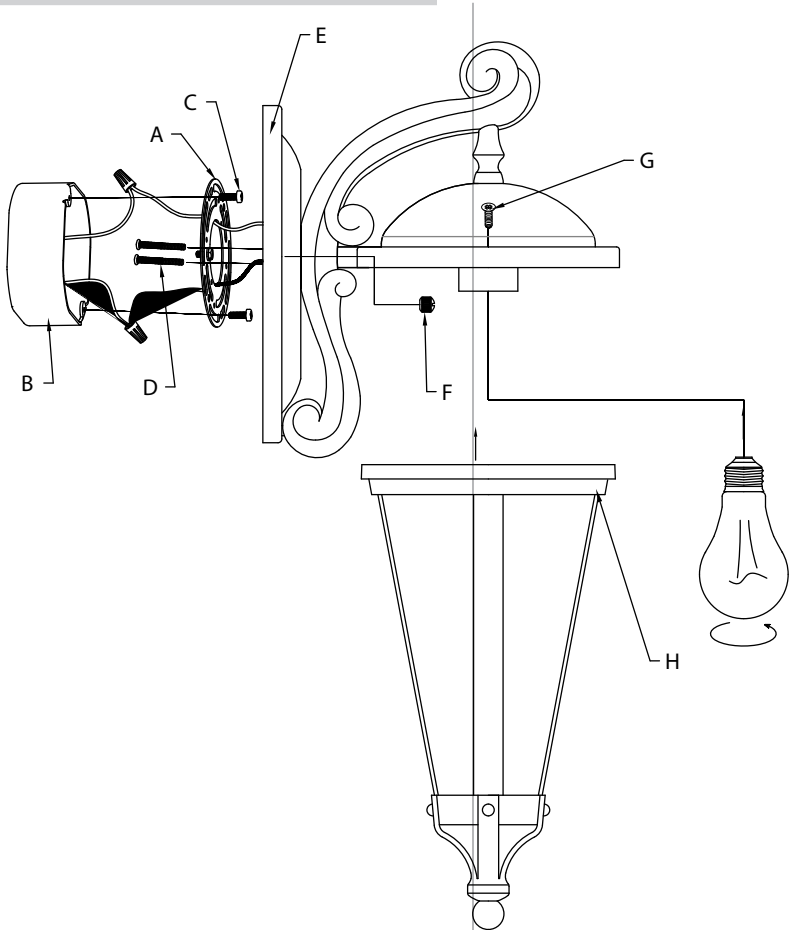

Parts List

- [A] Mounting Strap

[B] Outlet Box

[C] Strap Mounting Screws
- [D] Mounting Screws

[E] Canopy

[F] Ball Knobs

[G] Flat Head Screws
- [H] Bottom Assembly

Cautions

CAUTION – RISK OF SHOCK –
Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.

WARNING:
This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended.


INSTRUCTIONS FOR MOUNTING FIXTURE OUTDOORS AND/OR IN WET LOCATIONS.

- Mounting surface should be clean, dry, flat and 1/4" larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
- With silicone caulking compound, caulk completely around where back of canopy meets the wall surface to prevent water from seeping into outlet box.

Installation Instructions

- 1) Find the appropriate threaded holes on mounting strap[A] that align with hole distance in canopy[E]. Thread mounting screws[D] into threaded holes starting from outlet box[B] side.
- 2) Attach mounting strap to outlet box with strap mounting screws[C]. Mounting strap can be adjusted to suit position of fixture.
- 3) Grounding instructions: (See Illus. a or b).
 - a) On fixtures where mounting strap is provided with a hole and two raised dimples, wrap ground wire from outlet box around green ground screw, and thread into hole.
 - b) On fixtures where a cupped washer is provided, attach ground wire from outlet box under cupped washer and green ground screw, then thread into mounting strap.


If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector (Not provided) after following the above steps. Never connect ground wire to black or white power supply wires.

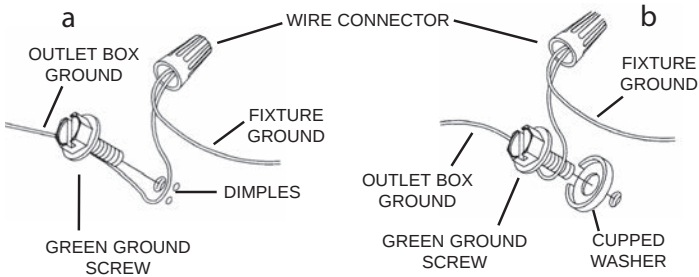

- 4) Make wire connections. Reference chart below for correct connections and wire accordingly.


Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without Tracer	Clear, Brown, Gold or Black with Tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wire (SPT 1 & SPT 2) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (See illus.)



- 5) Push fixture to wall over the protruding screws in the mounting strap. Be sure not to pinch wires between wall and canopy of fixture.
- 6) Screw on the two (2) ball knobs[F] to the canopy[E] Tighten to secure.
- 7) Insert recommended bulb(s). (Not supplied)
- 8) Raise the bottom assembly[H] up to the main body and secure into place using the two (2) flat head screws[G].

Diagrama de Accesorios

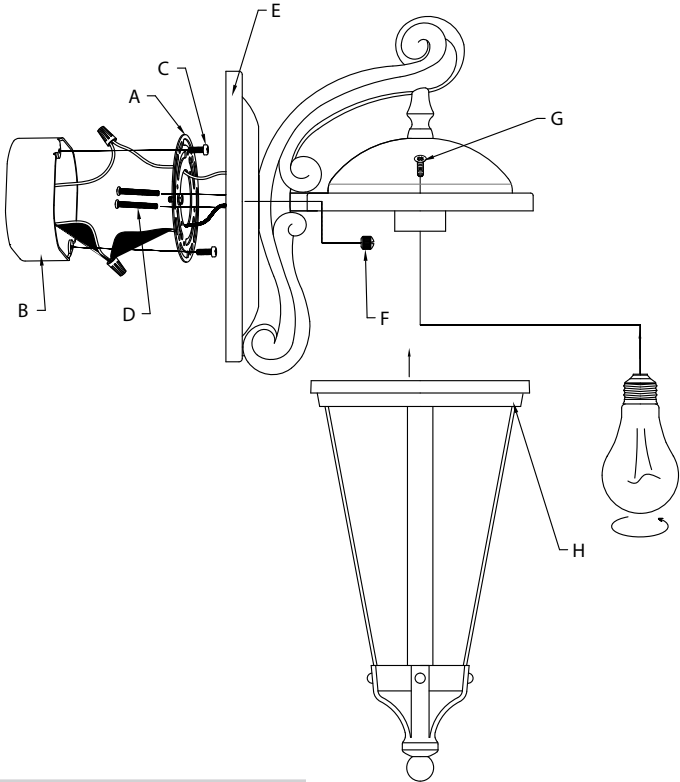

Lista de Partes

- [A]

Correa de Montaje
- [B]

Caja de Salida
- [C]

Tornillos de Fijación de la Correa
- [D]

Tornillos de Montaje
- [E]

La campana
- [F]

Perillas de bola
- [G]

Tornillos de
- [H]

cabeza plana
Ensamblaje inferior

Si la lámpara viene con alambre a tierra, conectar el alambre a tierra de la lámpara al alambre a tierra de la caja tomacorriente con un conector de alambres (No incluido) espues de seguir los pasos anteriores. Nunca conectar el alambra a tierra a los alambres eléctros negro o blanco.

Precauciones

PRECAUCIÓN – RIESGO DE DESCARGA ELÉCTRICA – Desconecte la electricidad en el panel principal del interruptor automático o caja principal de fusibles antes de comenzar y durante la instalación.

ADVERTENCIA:
Este accesorio está destinado a la instalación de acuerdo con el National Electrical Code (NEC) y todas las especificaciones del código local. Si no está familiarizado con los requisitos del código, la instalación se recomienda un electricista certificado.

INSTRUCCIONES PARA EL MONTAJE DEL ARTEFACTO AL AIRE LIBRE Y/O EN UN LUGAR MOJADO.


- La superficie de montaje debe estar limpia, seca, ser plana y 1/4” más grande que el esdudete en todos los bordes. Cualquier espacio libre entre la superficie de montaje y el escudete que exceda de 3/16” debe corregirse según se requiera.
- Calafatee totalmente con compuesto de calafatear de silicona alrededor donde el escudete sienta en la superficie de la pared para impedir la entrada de agua en la caja de conexiones.

Instrucciones de Instalación

- 1) Encuentre los orificios roscados adecuados en la correa de montaje[A] que se alinean con la distancia del agujero en el dosel[E]. Enrosque los tornillos de montaje[D] en los orificios roscados desde el lado de la caja de salida[B].
- 2) Fije la correa de montaje a la caja de salida con los tornillos de fijación de la correa[C]. La correa de montaje se puede ajustar para adaptarse a la posición del aparato.
- 3) Instrucciones de conexión a tierra solamente para los Estados Unidos. (Vea la ilustracion a o b).

a) En las lámparas que tienen el fleje, de montaje con un agujero y dos hoyuelos realzados, enrollar el alambre a tierra de la caja tomacorriente alrededor del tornillo verde y pasarlo por el aquiero.


b) En las lámparas con una arandela acopada, fijar el alambre a tierra de la caja tomacorriente del ajo de la arandela acoada y tornillo verde, y paser por el fleje de montaje.

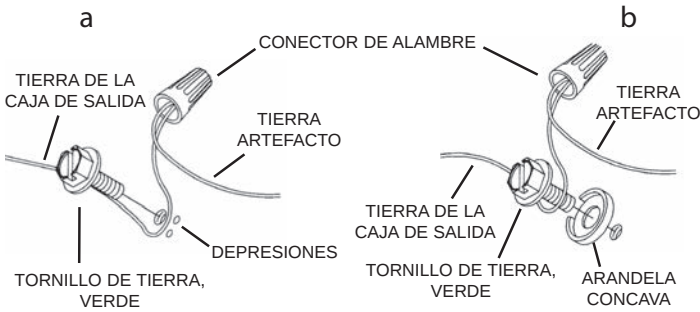

- 4) Haga las conexiones de los alambres. La tabla de referencia de abajo indica las conexiones correctas y los alambres correspondientes.

Conectar el alambre de suministro negro o rojo al	Conectar el alambre de suministro blanco al
Negro	Blanco
*Cordon paralelo (redondo y liso)	*Cordon paralelo (cuadrado y estriado)
Claro, marrón, amarillio o negro sin hebra identificadora	Claro, marrón, amarillio o negro con hebra identificadora
Alambre aislado (diferente del verde) con conductor de cobre	Alambre aislado (diferente del verde) con conductor de plata


*Nota: Cuando se utiliza alambre paralelo (SPT 1 y SPT 2). El alambre neutro es de forma cuadrada o estriada y el otro alambre será de forma redonda o lisa. (Vea la ilustración).



Hilo Neutral

- 5) Empuje el accesorio a la pared sobre los tornillos sobresalientes en la correa de montaje. Asegúrese de no pellizcar los cables entre la pared y la cubierta del accesorio.
- 6) Atornille las dos (2) perillas de bola [F] a la campana [E] Apriete para asegurar.
- 7) Inserte las bombillas recomendadas. (No incluido)
- 8) Levante el ensamblaje inferior [H] hasta el cuerpo principal y asegúrelo en su lugar utilizando los dos (2) tornillos de cabeza plana [G].

Fixture Diagram

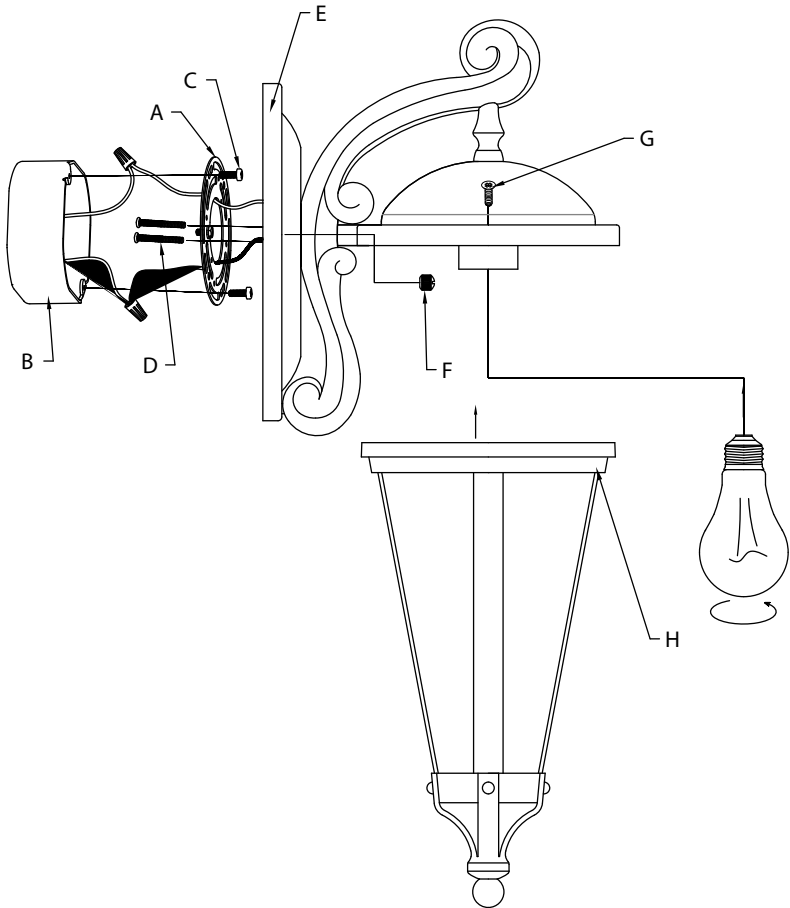

Parts List

- | | | |
|---------------------------|----------------------|---------------------|
| [A] Mounting Strap | [D] Mounting Screws | [H] Bottom Assembly |
| [B] Outlet Box | [E] Canopy | |
| [C] Strap Mounting Screws | [F] Ball Knobs | |
| | [G] Flat Head Screws | |

Cautions

CAUTION – RISK OF SHOCK –
Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.

WARNING:
This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended.


INSTRUCTIONS FOR MOUNTING FIXTURE OUTDOORS AND/OR IN WET LOCATIONS.

- Mounting surface should be clean, dry, flat and 1/4" larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
- With silicone caulking compound, caulk completely around where back of canopy meets the wall surface to prevent water from seeping into outlet box.

Installation Instructions

- 1) Find the appropriate threaded holes on mounting strap[A] that align with hole distance in canopy[E]. Thread mounting screws[D] into threaded holes starting from outlet box[B] side.
- 2) Attach mounting strap to outlet box with strap mounting screws[C]. Mounting strap can be adjusted to suit position of fixture.
- 3) Grounding instructions: (See Illus. a or b).
 - a) On fixtures where mounting strap is provided with a hole and two raised dimples, wrap ground wire from outlet box around green ground screw, and thread into hole.
 - b) On fixtures where a cupped washer is provided, attach ground wire from outlet box under cupped washer and green ground screw, then thread into mounting strap.


If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector (Not provided) after following the above steps. Never connect ground wire to black or white power supply wires.

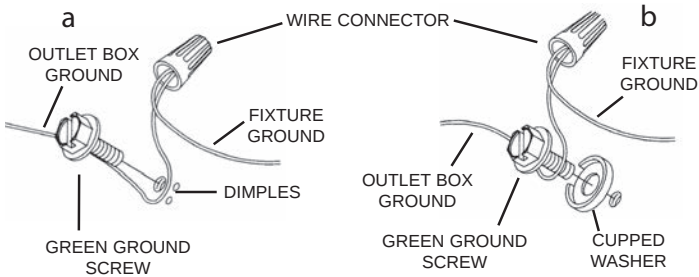

- 4) Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without Tracer	Clear, Brown, Gold or Black with Tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor


*Note: When parallel wire (SPT 1 & SPT 2) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (See illus.)



Neutral Wire

- 5) Push fixture to wall over the protruding screws in the mounting strap. Be sure not to pinch wires between wall and canopy of fixture.
- 6) Screw on the two (2) ball knobs[F] to the canopy[E] Tighten to secure.
- 7) Insert recommended bulb(s). (Not supplied)
- 8) Raise the bottom assembly[H] up to the main body and secure into place using the two (2) flat head screws[G].

Diagramme d'appareils

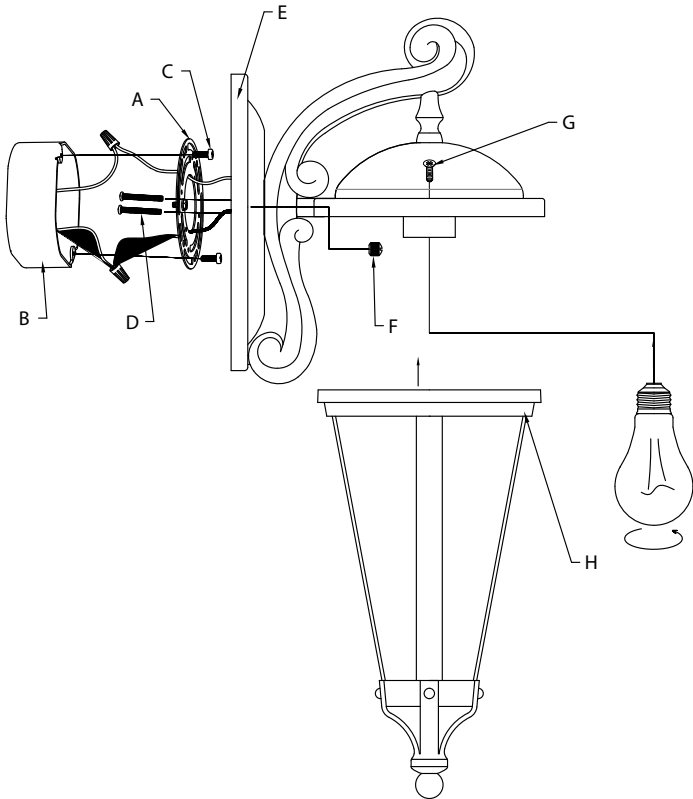

Liste des Pièces

- [A]

Sangle de Montage
- [B]

Côté Sortie
- [C]

Vis de Fixation de la Sangle
- [D]

Vis de Montage
- [E]

Couvert
- [F]

Boutons à rotule
- [G]

Vis à tête plate
- [H]

La partie inférieure

Précautions

ATTENTION – RISQUE DE DÉCHARGES ÉLECTRIQUES -
Couper le courant au niveau du panneau du disjoncteur du circuit principal ou de la boîte à fusibles principale avant de procéder à l’installation.

ATTENTION:
Ce luminaire doit être installé conformément aux codes d’électricité nationaux (NEC) et satisfaire toutes les spécifications des codes locaux. Si vous ne connaissez pas les exigences de ces codes, il est recommandé de confier l’installation à un électricien certifié.

INSTRUCTIONS DE MONTAGE DE LUMINAIRE À L’EXTÉRIEUR ET/OU DANS DES LIEUX HUMIDES.


- La surface de montage doit être propre, sèche, plate et de 0,6 cm plus épaisse que le cache sur tous les côtés. Tout écart entre la surface de montage et le cache dépassant de 0,5 cm doit être rectifié selon les besoins.
- À l’aide de matériaux d’étanchéité à la silicone, calfeutrer bien autour où l’arrière du cache entre en contact avec le mur pour empêcher l’eau de passer dans la boîte de raccordement.

Instructions d’installation

- Trouvez les trous filetés appropriés sur la sangle de montage[A] qui s’alignent avec la distance du trou dans le couvert[E]. Vis de montage[D] du filetage dans les trous filetés à partir du côté sortie[B] côté.
- Fixez la sangle de montage à la boîte de sortie avec les vis de fixation de la sangle[C]. La sangle de montage peut être réglée en fonction de la position du luminaire.
- Connecter les fils. Se reporter au tableau ci-dessous pour faire les connexions.

Connecter le fil noir ou rouge de la boîte	Connecter le fil blanc de la boîte
A Noir	A Blanc
*Au cordon parallèle (rond et lisse)	*Au cordon parallèle (à angles droits el strié)
Au transparent, doré, marron, ou noir sans fil distinctif	Au transparent, doré, marron, ou noir avec un til distinctif
Fil isolé (sauf fil vert) avec conducteur en cuivre	Fil isolé (sauf fil vert) avec conducteur en argent

*Remarque: Avec emploi d’un fil parallèle (SPT 1 et SPT 2). Le fil neutre est à angles droits ou strié et l’autre fil doit être rond ou lisse (Voir le schéma).



Fil Neutre

- Poussez le projecteur sur le mur par-dessus les vis en saillie de la sangle de montage. Assurez-vous de ne pas pincer les fils entre le mur et le toit du luminaire.
- Visser les deux (2) boutons à rotule [F] sur le baldaquin [E]. Serrer pour fixer.
- Insérer l’ampoule recommandée. (Non fourni)
- Soulevez la partie inférieure [H] du corps principal et fixez-la à l’aide des deux (2) vis à tête plate [G].