DOUBLE OFFSET BATH SUPPLIES

Cat.No. 5576





H: 24"

OD: ½"

Features:

- ▶ For use with faucets mounted to the tub wall
- ► No Stops
- ▶¹/₂" Compression inlet
- ▶¾" Compression outlet
- ▶ 0.500" Outer diameter
- ▶ 0.440" Inner diameter
- ▶ 0.030" Thickness of the wall
- ► Availble in 5 finishes


Compliance Certification

Meets or exceeds the following specifications: ASME-A112 (and 19.6M) for Vitreous china fixtures. ASME 112.19.9M for fire clay fixtures.

Finishes:

CP Polished ChromePB Polished BrassORB Oil Rubbed Bronze

PN Polished NickelBN Brushed Nickel

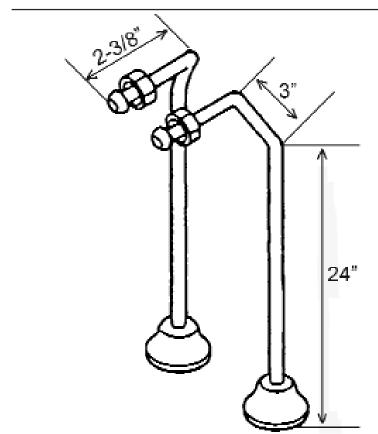

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions and specifications subject to change without notice.