



Project Name: _____


Location: _____

Item #: _____ Qty: _____

Model: _____

UNDERCOUNTER GLASSWASHER

MODEL: G-3000-1 G-3000-3

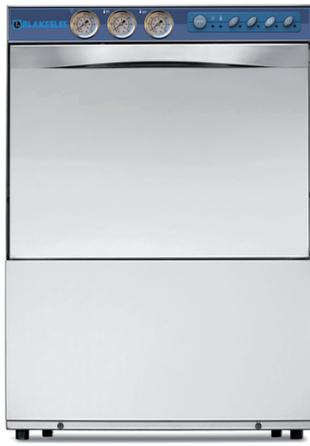

G-3000-1 / G-3000-3

RACK SIZES:

Dish Rack	20 in x 20 in	508mm x 508mm
Dish Max Height	12.625 in	317.5mm
Plates Diameter	13.625 in	345mm

WATER CONSUMPTION

Per Rack	0.60 – 0.74 (gal)	2.27 – 2.8 (L)
----------	-------------------	----------------

OPERATING CYCLE:

1 Total Cycle	120 sec
---------------	---------

OPERATING CAPACITY

Racks per hour	30
Wash Tank Capacity	7.6 (gal) 28.76 (L)
Booster Capacity	1.5 (gal) 5.68 (L)

CYCLE TEMPERATURES

Wash	160°F	71.1°C
Rinse	185°F	85°C

WATER REQUIREMENTS

Inlet Temperature	140°F	60°C
Inlet Water Pressure	25-60psi	1.8 – 4.2kg/cm ²
Flow Pressure	15-25psi	1.0 – 1.8kg/cm ²

All specifications are dependent on water pressure and temperature

Blakeslee's undercounter glasswasher is ideal for bars, pubs, restaurants and hotels. A beautifully redesigned machine at a reasonable price.

FEATURES AND CONSTRUCTION

- 30 rack per hour / 2 minute cycle
 - Built-in 6.5 kW booster
 - 2.9 kW wash tank heater
 - 185-degree sanitizing rinse every cycle
 - Cold rinse cycle
 - Built-in detergent and rinse aid dispensers with hook-up provided
 - Removable wash and rinse arms (upper and lower)
 - Triple filtering system to capture soil and debris
 - Top mounted controls
 - Easy to read and simple to operate
 - Double skin stainless steel door with security micro-switch
 - Deep formed rack supports
 - Internal cavity – 304 stainless steel
 - Noise – 63 dB(A)
 - Built in drain pump provides versatility for installation locations
43W hMAX 31 1/2" (10, 56 gal(US)/min**)
 - Pump Power 0.75 HP/ 560W (89.8 gal (US) / min***)
- ** Maximum Flow Rate
- *** Maximum Flow Rate


3RD PARTY APPROVALS



BLAKESLEE WARRANTY (USA / CANADA)

Blakeslee dishwashers are warrantied for one year from date of installation against defective materials and workmanship.

Contact Blakeslee USA for details at service@blakesleeinc.com or 630.532.5021

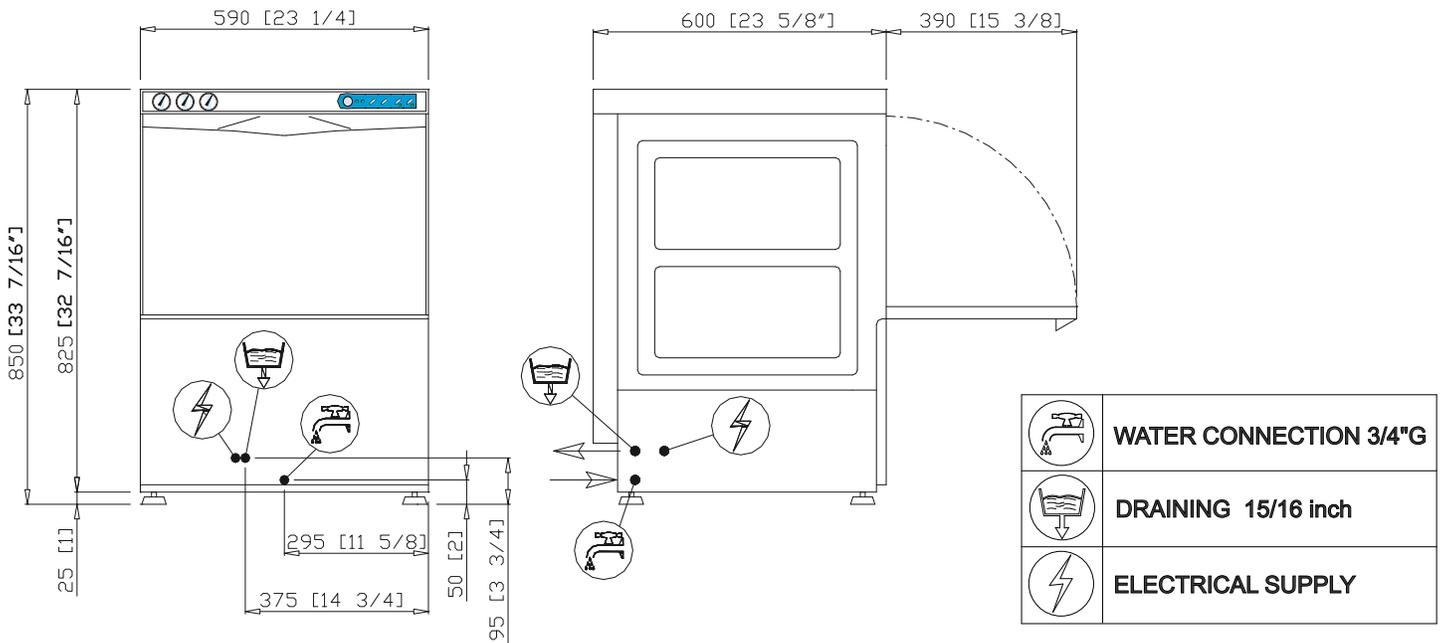

MODEL	SHIPPING DIMENSIONS	RACK SIZE	RACKS PER HOUR	ELECTRICAL	KW POWER	SHIPPING WEIGHT
G-3000-1	34" x 30" x 44" (836 x 762 x 1118 mm)	20" X 20" (500 X 500mm)	30	220-240V/60Hz/1Ph	29.5A - 32.2A / 7,060 Watts	190 lbs (86.18 kg)
G-3000-3	34" x 30" x 44" (836 x 762 x 1118 mm)	20" X 20" (500 X 500mm)	30	220-240V/60Hz/3Ph	17.1A - 18.6A / 7,060 Watts	190 lbs (86.18 kg)

All specifications are dependent on water pressure and temperature

*Other voltages available - contact factory