

Bike Rack

Garage Organization

	DESCRIPTION	QTY.
Α	Side Frames	2
В	Bottom Frame	1
С	Tray	1
D	Square Spreader	1
E	Round Spreader	1
F	Vertical Poles	6
G	Hooks	4
Н	Adjustable Feet	4
	M6 Bolts	24

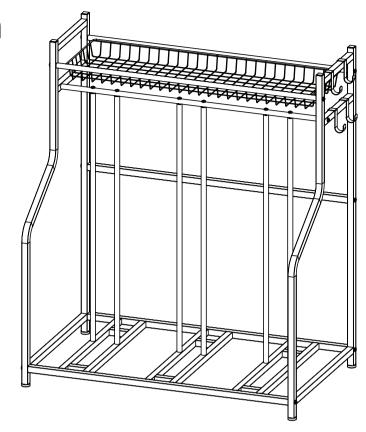

PARTS_

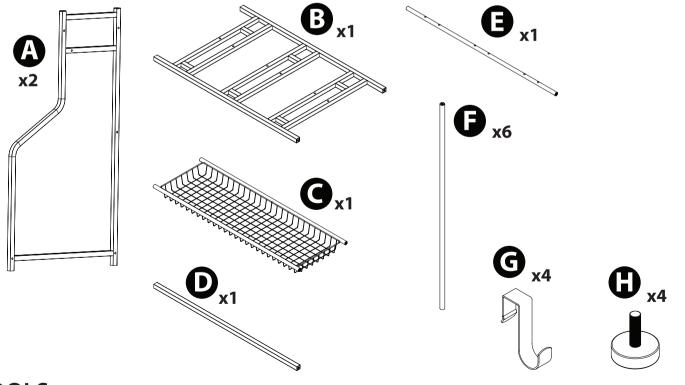



Use #2 Phillips screwdriver or power drill with #2 drive bit for assembly

MARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ASSEMBLY

NOTE: Assemble with the bolts loosely attached, tighten all bolts completely when the unit is fully assembled. Start by inserting the feet (**H**) into the bottom of the side frames (**A**). Align the bottom frame (**B**) to the side frames (**A**) and insert the bolts from both sides.

Next insert bolts through both side frames (A) into the square spreader (D). With the rack on its back, insert bolts from the under the bottom frame (B) into the vertical poles (F).

With the rack upright align the round spreader (E) and insert the bolts into the upright poles (F) and then insert bolts through the side frames (A) into (E). Position tray (C) between side frames (A) and insert bolts. Now, you can tighten all the bolts fully. Attach the hooks (G) at the desired locations by snapping onto the top horizontal tubes on side frames (A).

