

DEWA

# up 300 to 300 MINUTES RUNTIME\*\*

# DCE6820B 20V MAX\* POWERED WATER TANK (BARE TOOL)

A convenient way to provide a non-potable water supply to the jobsite. (Battery and charger sold separately.)

\*Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18. \*\*Per charge, using a DCB205 5.0 Ah Battery (sold separately). DEWALT PERFORM & PROTECT™ line of tools is designed to provide a high level of one or more of the following: dust containment, control, or low vibration, without sacrificing performance.



### **GUARANTEED TOUGH**:

### DCE6820BSS

MEAN

## **20V MAX\* POWERED WATER TANK (BARE TOOL)**



#### **SPECIFICATIONS**

MAX PSI (BAR)	23 PSI (1.6 Bar)
FLOW RATE	0.74 Gal./Min.
/OLTAGE	20V MAX*
TANK CAPACITY	4 Gallons (15 Liters)
.PA (emission sound pressure level)	65 dB(A)
DIMENSIONS	16.1 x 11 x 13 in.
IP RATING	IPX4

#### **TOOL WARRANTY**



#### **RELATED PRODUCTS**



**DCS692** 

<sup>\*</sup>Maximum initial battery voltage (measured without a workload) is 60 volts. Nominal voltage is 54.




Copyright ©2024 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool

An in the second second

DCE6820BSS



Gives steady water flow without having to be manually pressurized

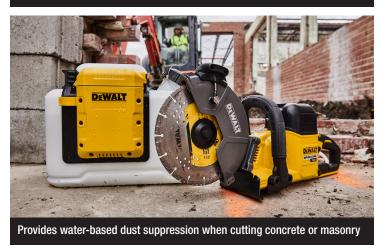

### **GUARANTEED TOUGH**.

**1-800-4-DEWALT** 

#### www.DeWALT.com