INSTRUCTION MANUAL

BATHROOM VANITY

Attach Your Receipt Here		
Model Number	Purchase Date	

Thank you for purchasing this quality product. Please carefully inspect all packing materials and check the carton for small parts that may have come loose during shipping.

For more installation instructions, please visit:

https://www.youtube.com/@tonabathroomfurniture 4063/playlists









Wall-mounted Bathroom Vanity



24V11-24, 24V11-30, 24V11-36, 24V11-42, 24V11-48, 24V11-60, 24V11-72 24V12-24, 24V12-30, 24V12-36, 24V12-42, 24V12-48, 24V12-60, 24V12-72 24V15-24, 24V15-30, 24V15-36, 24V15-48, 24V15-60, 24V15-72

Screw-mounted Bathroom Vanity



24V11-16

* Please verify the model on the package you received. Use the table above to confirm the product type of your item based on its model number. Different types correspond to different contents and installation methods.

TABLE OF CONTENTS

1. E	Before You Begin	.3
2. 5	Safety Warnings	.3
3. T	Fools Required (Not Supplied)	.3
4. lı	nstallation Instructions	4
4	1.1 Wall-Mounted Bathroom Vanity	.4
4	1.2 Screw-Mounted Bathroom Vanity	.7
5. F	Parts Replacement Guides	8
5	5.1 Side Panel Replacement	9
5	5.2 Drawer Panel Replacement	10
5	5.3 Door Panel Replacement	11
6. 0	Care & Maintenance	12
6	6.1 Scratches and Cracks Treatment	12
6	6.2 Daily Maintenance	12

1. BEFORE YOU BEGIN


- 1. Please read these instructions carefully to familiarize yourself with the required tools, materials, and installation sequences.
- 2. To avoid costly mistakes, please thoroughly follow the operating and safety instructions below.
- 3. All information in this manual is based on the latest product information available at the time of publication. We reserves the right to change product specifications, packaging, or availability at any time without notice.
- 4. Please carefully review the important care and cleaning guidelines at the end of this manual.
- 5. This product complies with GB 24977-2010.

2. SAFETY WARNINGS


Our products are precision-engineered to provide superior and safe performance, provided the following guidelines are met:

- 1. They are installed, commissioned, operated, and maintained according to the recommendations in this manual.
- 2. To keep the product in good working order, periodic maintenance is necessary. Carefully inspect the new fixture for any signs of damage. When installing the products, follow the manufacturer's guidelines for power tool safety.


3. TOOLS REQUIRED (NOT SUPPLIED)

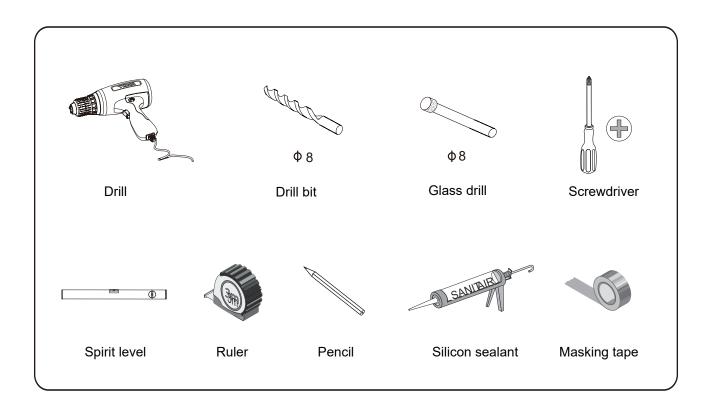

4.1 Wall-mounted Bathroom Vanity

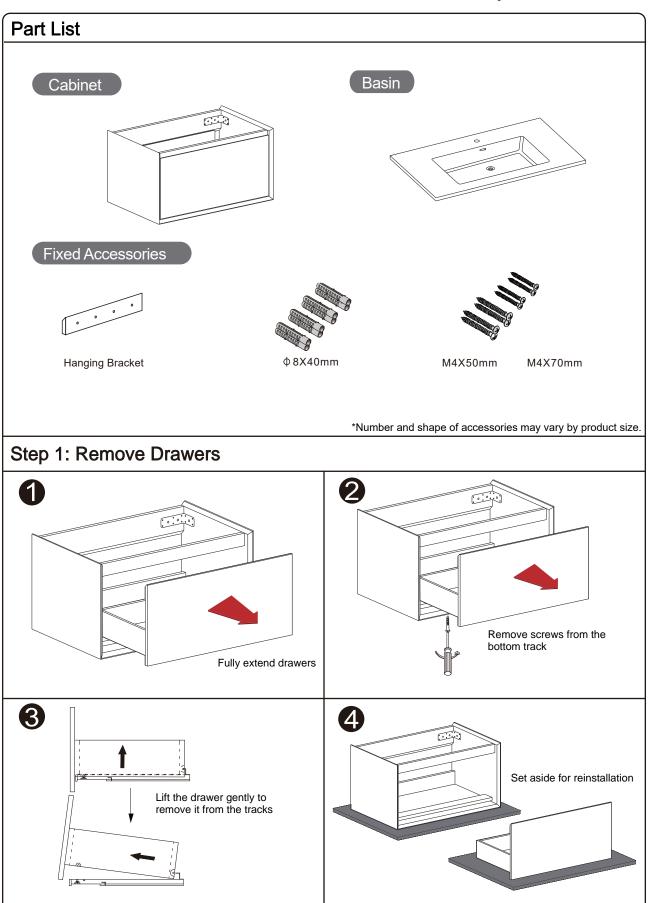

4. INSTALLATION INSTRUCTIONS

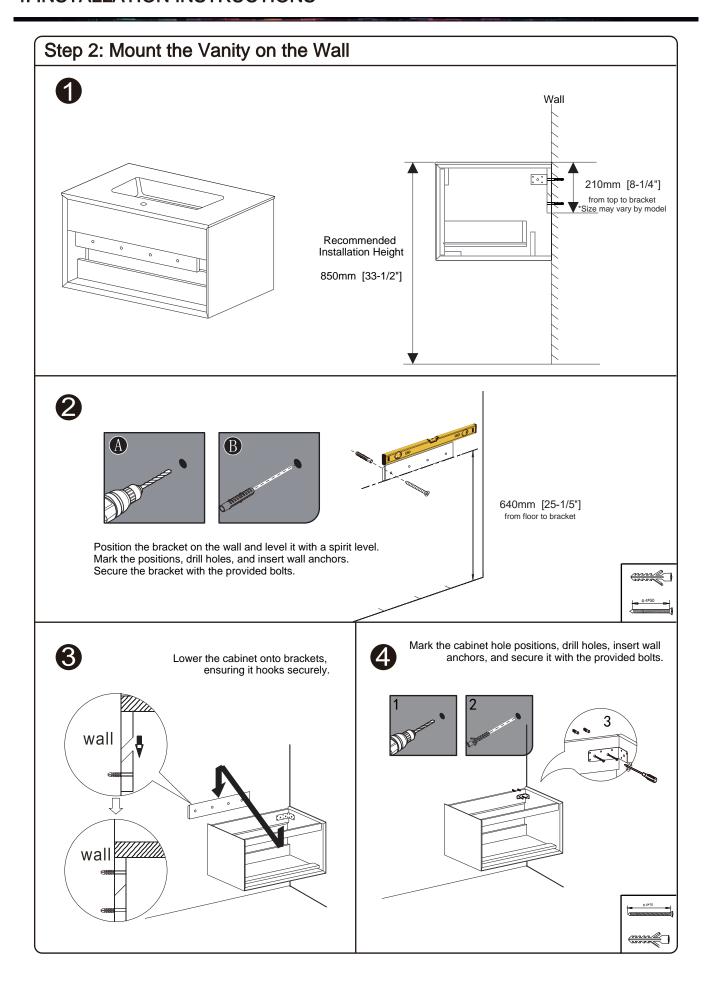

4. INSTALLATION INSTRUCTIONS

Step 3: Install the Countertop


1

Apply the silicone sealant in a continuous bead along the top edges of the cabinet




2


Install the faucet, water supply lines and drain assembly. Place the top on the cabinet. Allow to stand for 24 hours.




Step 4: Reinstall Drawers

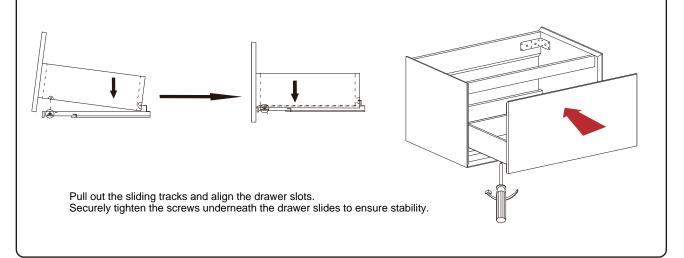

4.2 Screw-mounted Bathroom Vanity

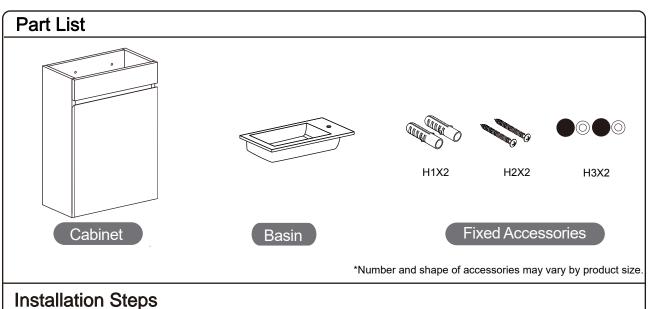


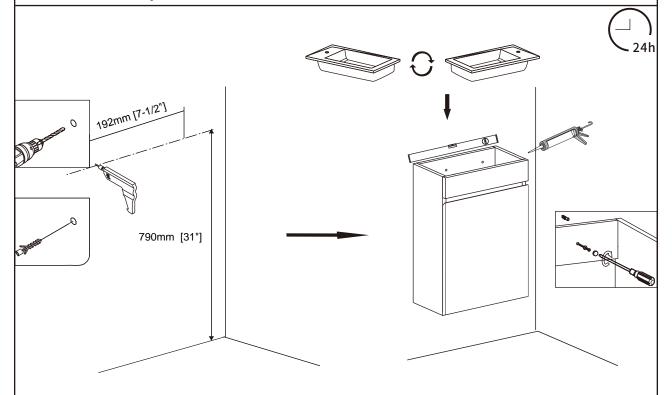


Step 1: Measure the length between the two holes on the vanity back panel which is predrilled before delivery. Normally 192mm /7-1/2" apart. The recommended installation height is 790mm/31" from floor. *Size may vary by models.

- Step 2: Mark these two points on the wall for bolts placement. Drill holes and insert wall anchors.
- Step 3: Lift the cabinet and align it with the installed anchors. Use bolts to secure.
- Step 4: Apply silicone sealant along the vanity top. Place the top on the vanity and let it dry for 24h.


Products are pre-assembled but may suffer minor damage in transit. Please contact customer service for free replacement parts if required. Please follow the instructions strictly when installing the parts.

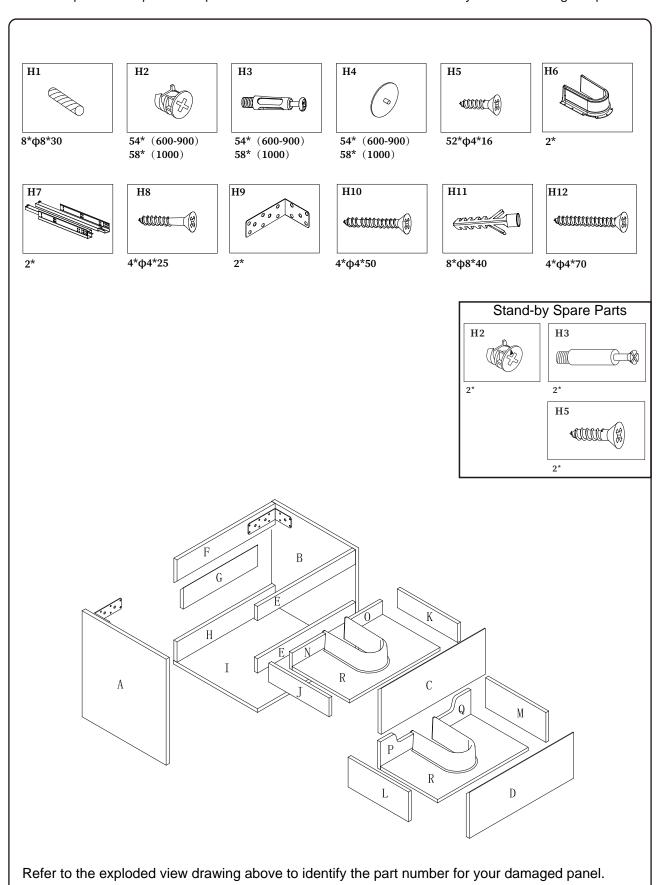


5.1 Side Panel Replacement

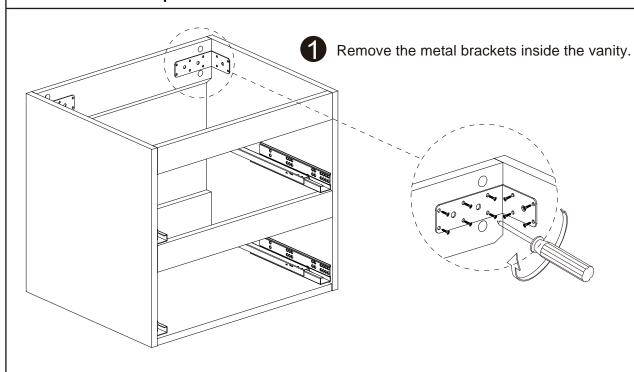

Remove the screws from the side panel as shown in the diagram below.

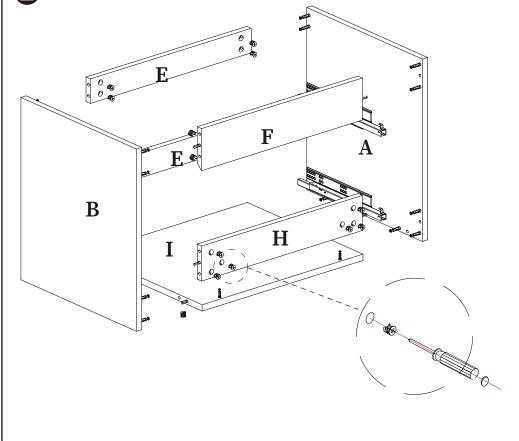


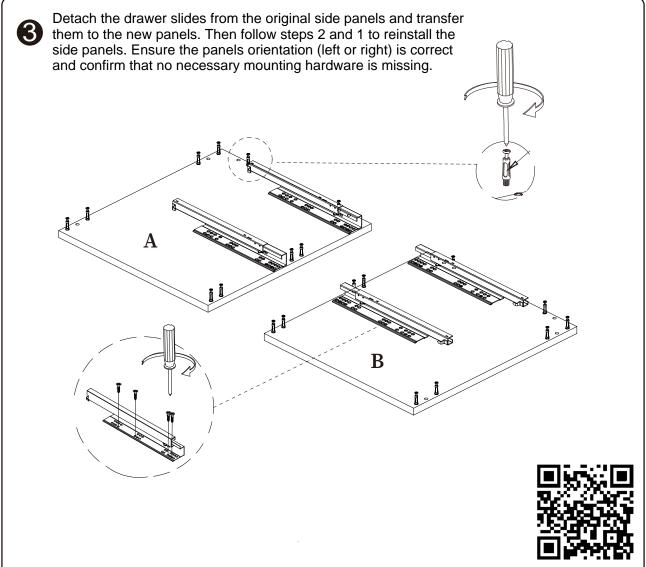

*Scan this QR code to view the side panel installation tutorial.


5.2 Drawers Panel Replacement

Remove the drawer panel screws as indicated in the diagram, detach the damaged panel, and then install the new panel.

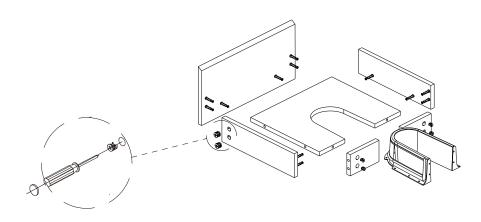


5.3 Door Panel Replacement

Unscrew the hinges to remove the broken doors. Align the hinges with the pre-drilled holes in the new door panel and fix in place.

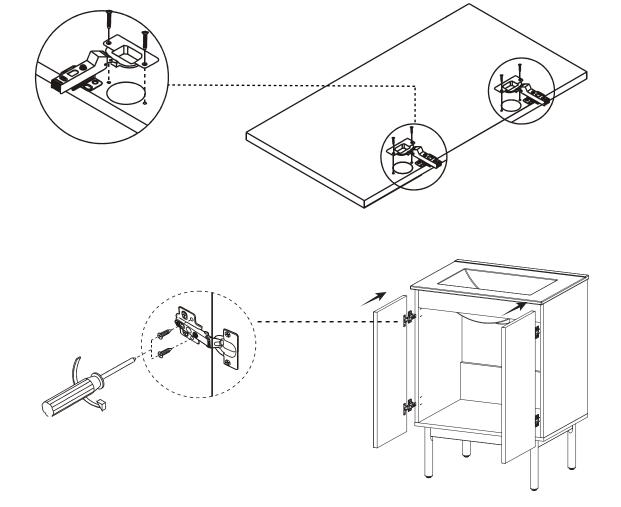

Remove the screws from the side panel as shown in the diagram below.

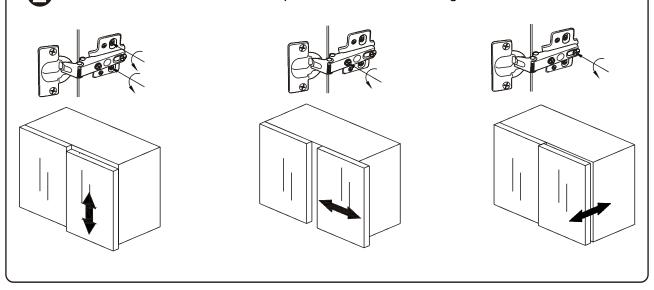


6.1 Scratches and Cracks Treatment

Scratches or cracks are rare with our products. However, if you do notice any minor scratches or cracks, we recommend using a professional Sink Fiberglass Tub Repair Kit designed to match your countertop' s color. Should you be uncertain about which kit to purchase, please contact our customer service team. We are here to assist you in selecting the right repair kit for a seamless and satisfactory fix.

How to Use the Repair Kit:

- Step 1: Thoroughly clean the surface of the area to be repaired.
- Step 2: Mix equal parts of A and B (1:1 ratio) according to the instructions provided.
- Step 3: Stir the mixture for 3-5 minutes until it is fully blended and even.
- Step 4: Apply the mixed product to the damaged area, spreading it evenly and smoothing it out.
- Step 5: Allow the repair adhesive to cure for at least 2-3 hours. Once cured, use sandpaper to smooth the surface.
- Step 6: After sanding, ensure that the surface is smooth and level.

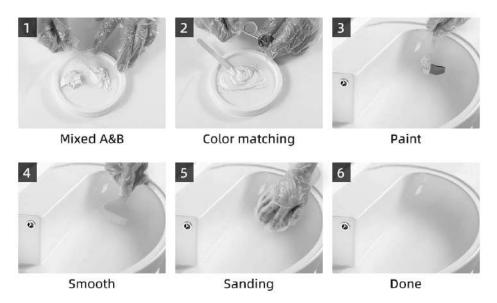

For substantial cracks or significant damage affecting usage, please contact our customer service team. We can offer a replacement based on the damage extent. Your satisfaction is our priority, and we are dedicated to providing excellent service.

6.2 Daily Maintenance

To extend the life of the product, please do the maintenance work every day. The following methods are for reference only.

- Please dry the cabinet immediately with clean, soft cloth when it encounters water.
- ** When the product is stained with dirt, wipe the cabinets clean with a soft, damp cloth, apply some cleaners, and dry immediately with another clean, soft cloth.
- The water supply pipes, the drainage pipes, and the connection parts are prone to water leakage under different circumstances. Please check these parts regularly to avoid accidents due to water leakage.
- * After the product is used for a period of time, dirt will remain on the drain plug, which will affect drainage, so the plug needs to be cleaned regularly.

KEEP CABINET AWAY FROM WATER, which will cause deformation and damage.







DO NOT put lit cigarettes on the counter or basin, which will cause discoloration.







DO NOT pour acid or alkaline solutions into the basin, which will cause discoloration, leak or damage.







AVOID DIRECT SUNLIGHT, which may cause deformation and discoloration.







AVOID HEAT, which will cause deformation and discoloration.









DO NOT pour hot water into the basin, which may cause damage.







AVOID nylon brush, toilet cleaner or hydrochloric acid cleaner, which will cause damage







AVOID dropping hard objects into the basin, which may cause damage.








For more installation instructions, please visit: https://www.youtube.com/@tonabathroomfurniture4063/playlists











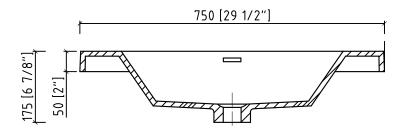

SECTION B-B

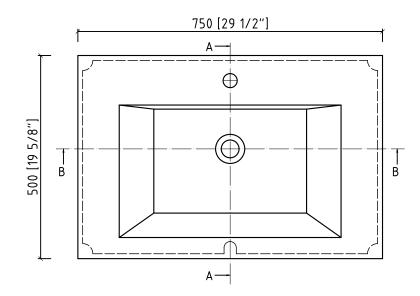



SECTION A-A

