



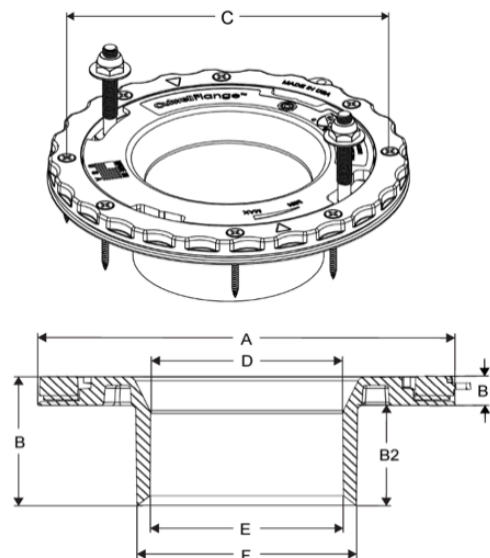


ALL DIMENSIONS ARE IN INCHES.		Model Nos.		
		A43	P43	PG43
<b>A</b>	Overall Diameter	7.56	7.56	7.56
<b>B</b>	Max. Overall Height*	2.53	2.53	2.53
<b>B1</b>	Flange Height Above Subfloor or Slab* (w/ 1 Sealing Gasket)	0.58	0.58	0.58
	Flange Height Above Subfloor or Slab* (w/ 2 Sealing Gaskets)	0.59	0.59	0.59
<b>B2</b>	Hub Depth	1.95	1.95	1.95
<b>C</b>	Screw Centers	6.76	6.76	6.76
<b>D</b>	Hub I.D. (Bottom Socket)	3.485 – 3.500	3.485 – 3.500	3.485 – 3.500
<b>E</b>	Hub I.D. (Socket Entrance)	3.511 – 3.525	3.515 – 3.529	3.515 – 3.529
<b>F</b>	Hub O.D. (Socket Entrance)	3.967	3.967	3.967



\*Max. Overall Height and Flange Height Above Subfloor or Slab dimensions do not include additional height attributed to the thickness of the selected floor-covering membrane. Flange height in relation to the finished floor will vary depending on the thickness of the membrane and tile used during installation.

**NOTE:** Dimensional data is subject to customary manufacturing tolerances.



Model No.	Item No.	Certifications	Description	UPC / GTIN	Ct.	Wt (lb.)
A43	758130		Culwell® Flange 4-in x 3-in Hub Glue-in Black ABS Plastic	861225000202	1	0.88
				10861225000209	6	7.527
P43	758132		Culwell® Flange 4-in x 3-in Hub Glue-in White PVC Plastic	861225000219	1	1.03
				10861225000216	6	8.397
PG43	N/A		Culwell® Flange 4-in x 3-in Hub Glue-in Light Grey PVC Plastic	861225000226	1	1.03
				861225000223	6	8.397

Individually packaged with 5/16-in closet bolts  
(Screws are not included)

## MATERIALS AND STANDARDS INFORMATION:

- All models referenced above meet the requirements of IAPMO IGC 285 and NSF/ANSI 14, and are listed with IAPMO R&T, Inc. under File No. 8073 for compliance with the Uniform Plumbing Code and International Plumbing Code. In addition, Models A43 & PG43 meet the requirements of CSA B181.1 and CSA B181.2, respectively, and are also listed with IAPMO R&T, Inc. for compliance with the National Plumbing Code of Canada.
- PVC flange bodies comply with the requirements of ASTM D2665.
- ABS flange bodies comply with the requirements of ASTM D2661.
- Clamping rings are made of nylon that has a flexural modulus of at least 2,000 MPa (290,076 psi), as specified in the Basic Property Table (Table PA) of ASTM D4066.