



**Underscore®**  
72" x 42" drop-in bath  
**K-1137**

**Features**

- Spacious design accommodates up to two bathers
- Integral lumbar support
- Slotted overflow allows for deep soaking

**Material**

- Acrylic

**Installation**

- Center drain
- Drop-in or undermount

**Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

**Recommended Products/Accessories**

K-592 Under-Mount Installation Kit

K-1601 Bath/whirlpool footstop, removable

K-23726 Drain treatment

**Codes/Standards**

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662


**KOHLER® Plastic Baths and Shower  
Bases Lifetime Limited Warranty**

See website for detailed warranty information.


**Available Colors/Finishes**

*Color tiles intended for reference only.*

| Color                                                                             | Code | Description  |
|-----------------------------------------------------------------------------------|------|--------------|
|  | 0    | White        |
|  | 96   | Biscuit      |
|  | 95   | Ice™ Grey    |
|  | 7    | Black Black™ |

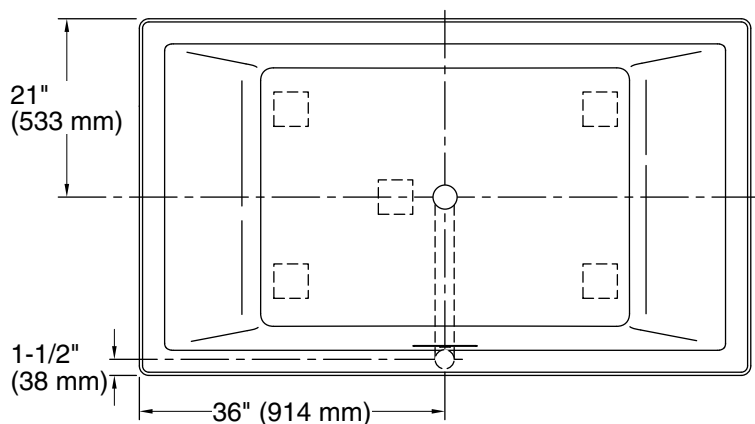

No change in measurements if connected with drain illustrated. (K-7272)

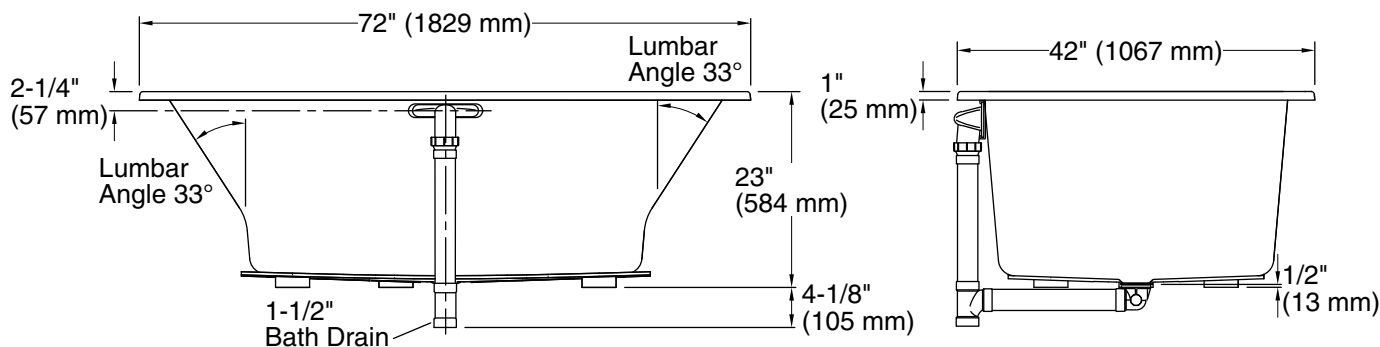

## Technical Information

All product dimensions are nominal.

|                        |                                                |
|------------------------|------------------------------------------------|
| Drain location:        | Center                                         |
| Basin area, bottom:    | 45-3/4" x 32" (1162 mm x 813 mm)               |
| Basin area, top:       | 66" x 36" (1676 mm x 914 mm)                   |
| Weight:                | 85 lbs (38.6 kg)                               |
| Minimum floor load:    | 60 lbs/ft² (292.9 kg/m²)                       |
| Water depth:           | 19" (483 mm)                                   |
| Water capacity:        | 139 gal (526.2 L)                              |
| Cutout:                | Drop-in, 70-1/2" x 40-1/2" (1791 mm x 1029 mm) |
| Minimum flat for door: | 2-7/16" (61 mm)                                |

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).