
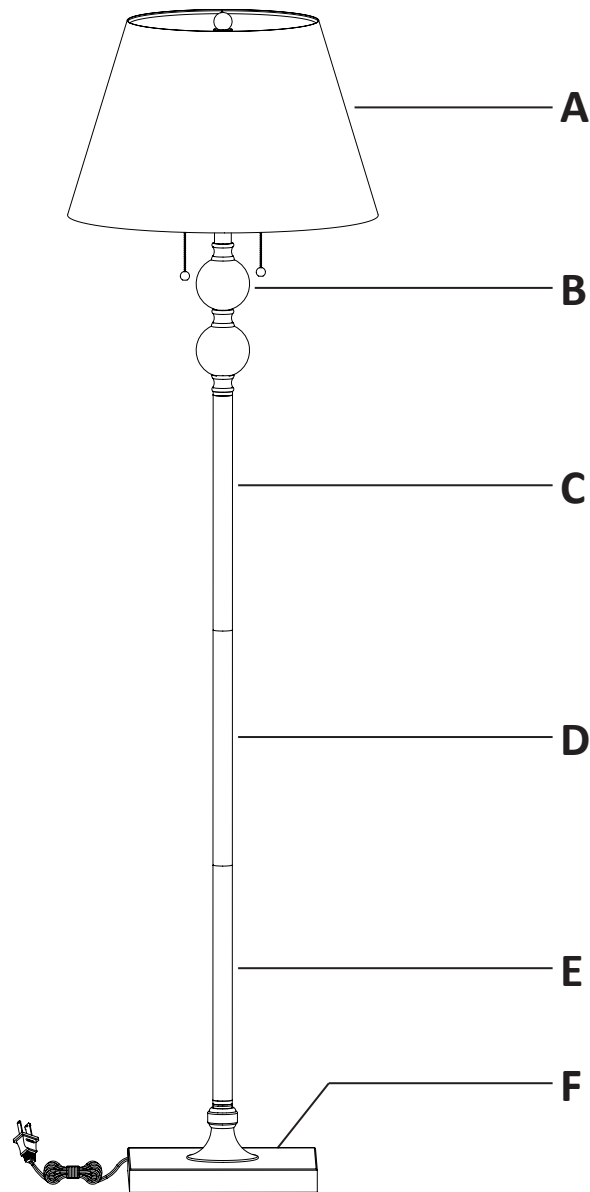




USE AND CARE MANUAL

FLOOR LAMP Model number: 21484



Hardware (Parts are not to scale)

H1 Finial (Pre-assembled to threaded pipe (H2)) 1 pc 	H2 Threaded pipe 1 pc 	H3 Tube (connecting to column (B)) 1 pc 	H4 Socket assembly (connecting to column (B)) 1 pc 
--	---	--	--

THIS MANUAL CONTAINS IMPORTANT SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.

IMPORTANT SAFETY INFORMATION

- This lamp is for indoor use only. The lamp should not be used near water. Never immerse the lamp in water or other liquids.
 - Never cover the lamp with any object including cloth or paper as this is a fire hazard.
 - Do not handle the bulb immediately after the light is turned off as it will be hot.
 - This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit into a polarized outlet only one way. If the plug does not fit fully into the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.
-

PREPARATION


- Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.
-

ASSEMBLY

1 Assembling the tubes to the base

- Pull the excess power cord through the base (F).
- Tighten the tube (E) onto the base (F).
- Tighten the tube (D) onto the tube (E).
- Tighten the tube (C) onto the tube (D).


NOTE: Do not twist the power cord.

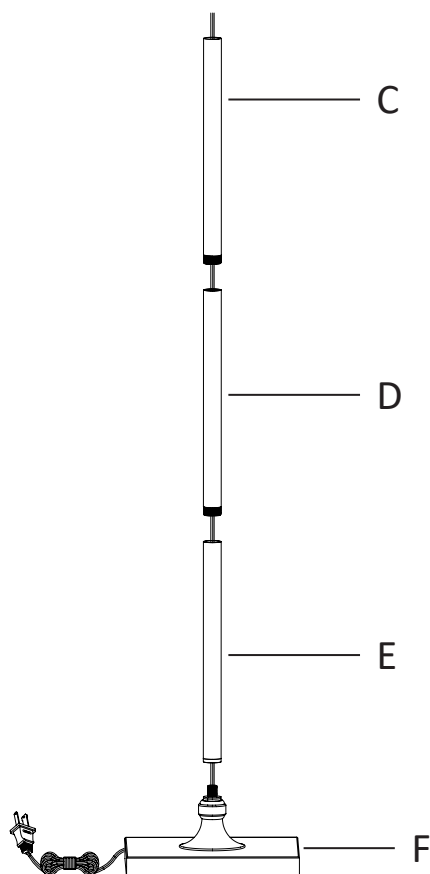

2 Assembling the socket assembly to the tube

- Pull the excess power cord through the base (F).
- Tighten the column (B) onto the tube (C).
- Tighten the tube (H3) onto the column (B).
- Tighten the socket assembly (H4) onto the tube (H3).
- Adjust the two socket chains of the socket assembly (H4) parallel to the base (F).


NOTE: Do not twist the power cord.

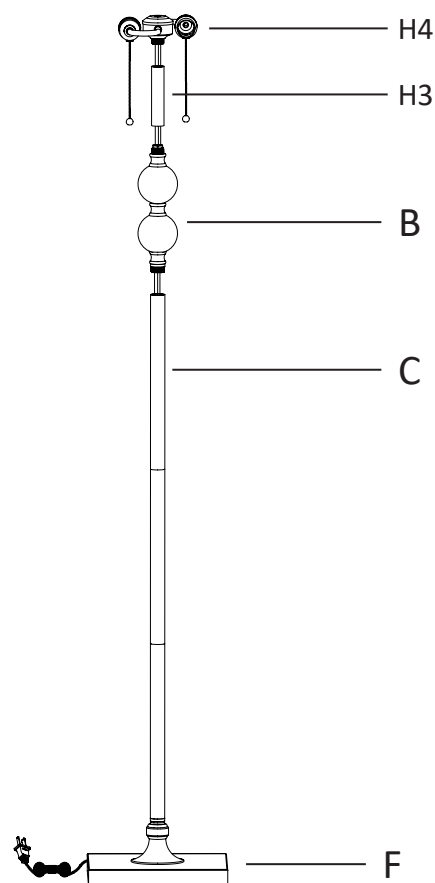

ASSEMBLY (continued)

3 Assembling the threaded pipe


- Tighten the threaded pipe (H2) into the top of the socket assembly (H4).

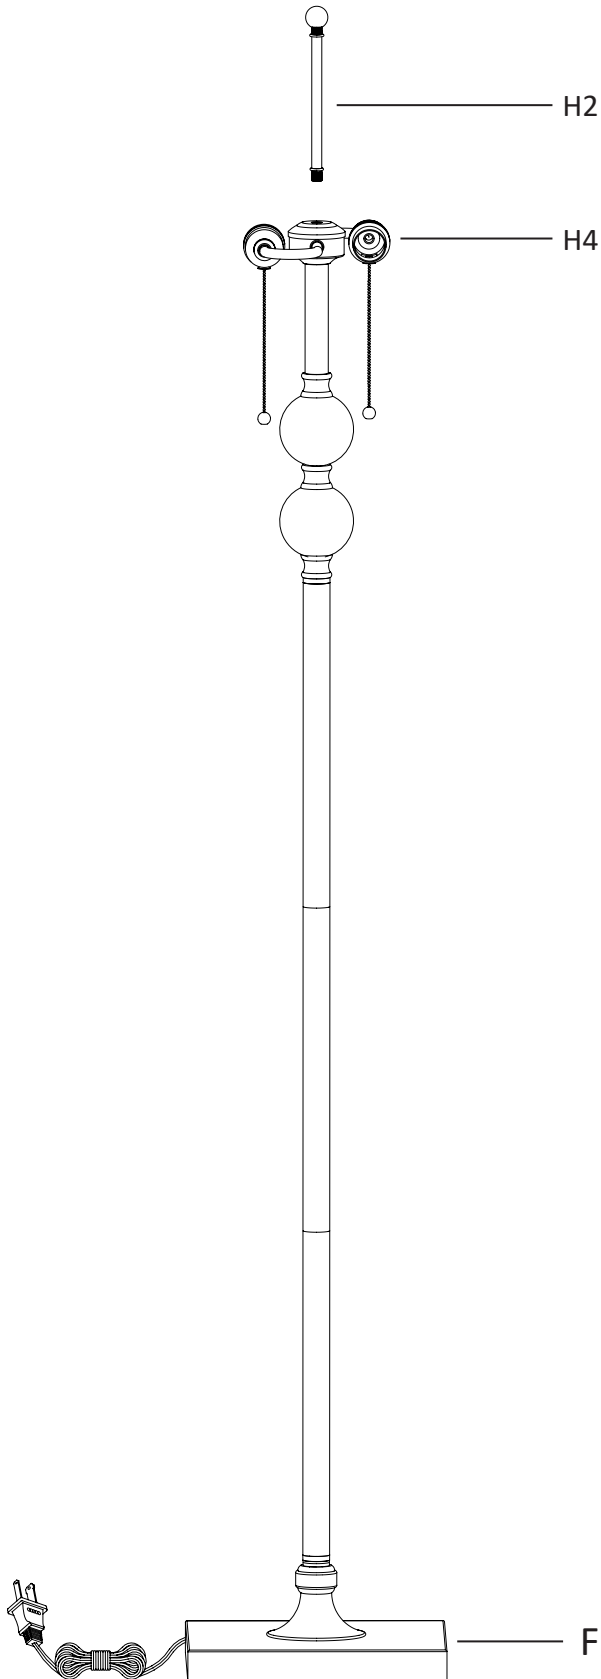

4 Installing the bulbs

- Install the light bulb (not provide) into the socket. Use two **MAX 60W medium base (E26) type "A"** bulbs (recommended).

NOTE: You can also use two **MAX 9W medium base (E26) self-ballasted LED** bulbs. Do not exceed the recommended wattage.

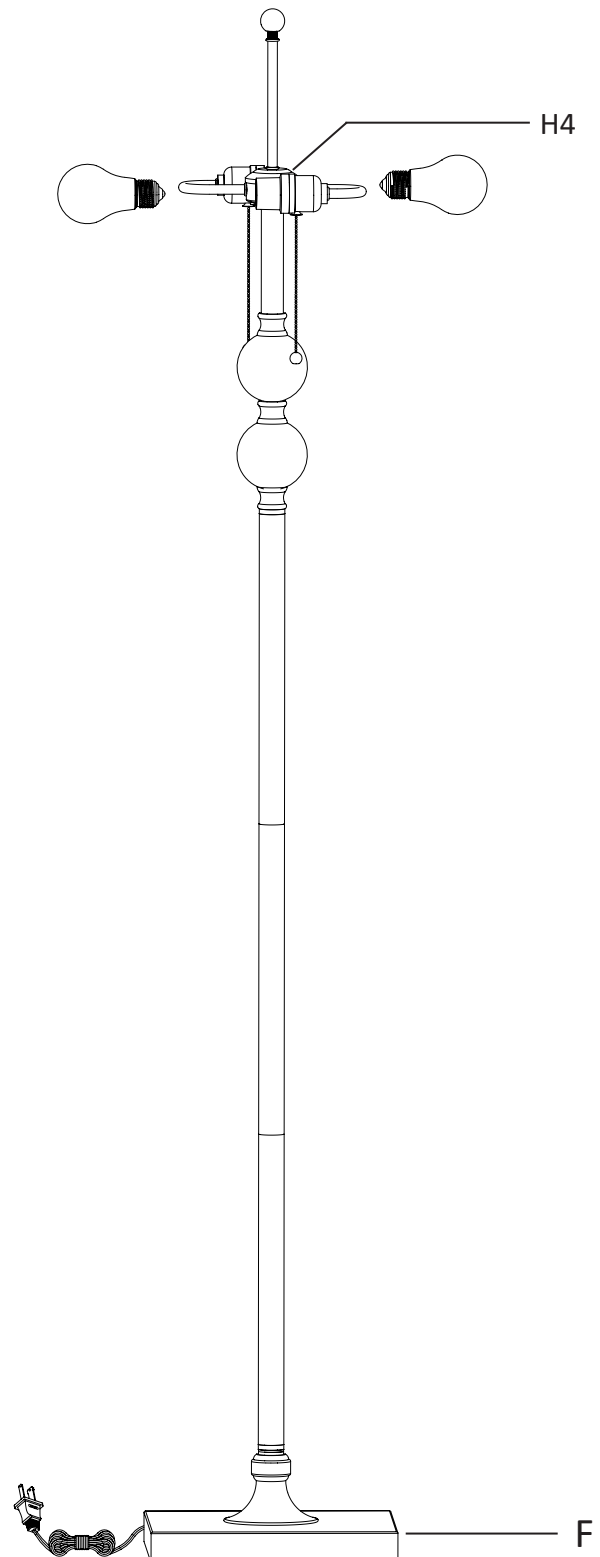


ASSEMBLY (continued)

5 Assembling the shade

- Unscrew the finial (H1) from the threaded pipe (H2).
- Place the shade (A) through the threaded pipe (H2) and secure with the finial (H1).
- Plug into the wall outlet, pull the pull chain of the socket assembly (H4) and enjoy.

NOTE: Remove the plastic cover from the shade before using.

Screw the short threaded end into the socket assembly. The threaded parts are different as illustration. If you found not able to secure the shade, please check the pipe and threaded end.

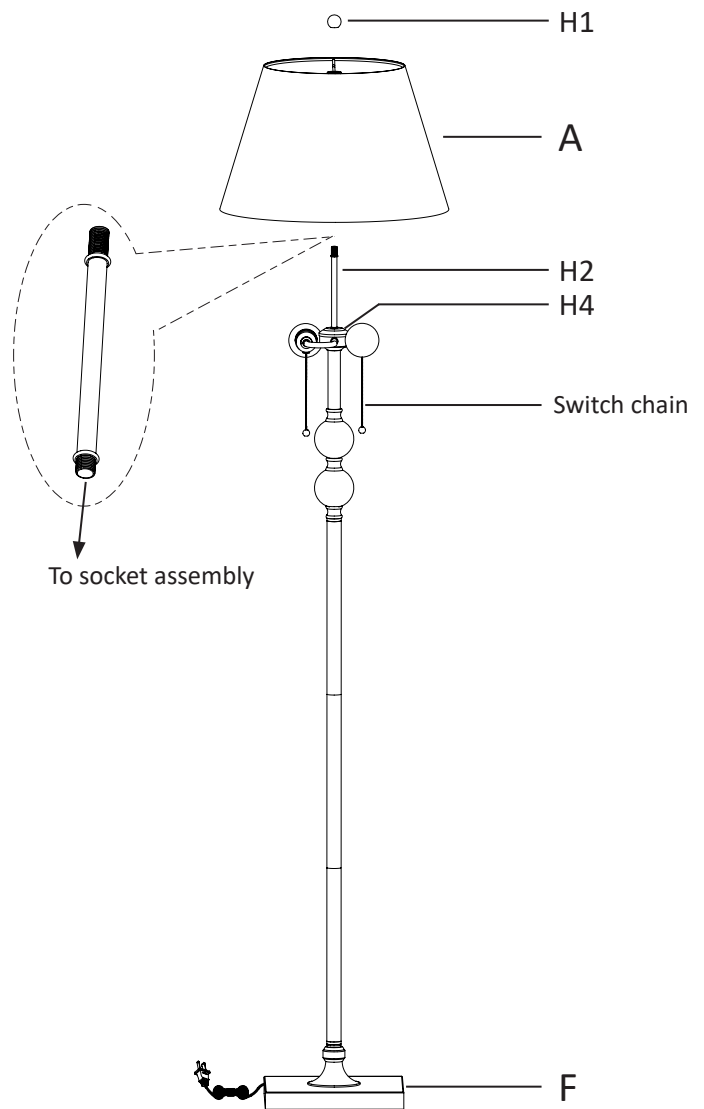

CLEANING

- Do not use any cleaners with chemicals, solvents, or harsh abrasives. Use only a dry, soft cloth to dust or wipe carefully.
- To clean the fixture, pull the plug from the wall outlet. Use a dry or slightly dampened, clean cloth to wipe the exterior surface of the fixture.

TROUBLESHOOTING

- The light does not come on at all:
 - a) Ensure whether the bulb is burned out.
 - b) Ensure the power supply is turned on.
 - c) Ensure the cord is plugged into an outlet.
 - d) Ensure the circuit breaker is set in the "ON" position.
- Fuse blows or circuit trips when light is turned on.
 - a) Check for crossed wires, ensure wiring is correct.

