


MEET YOUR TUSHY



YOUR TUSHY

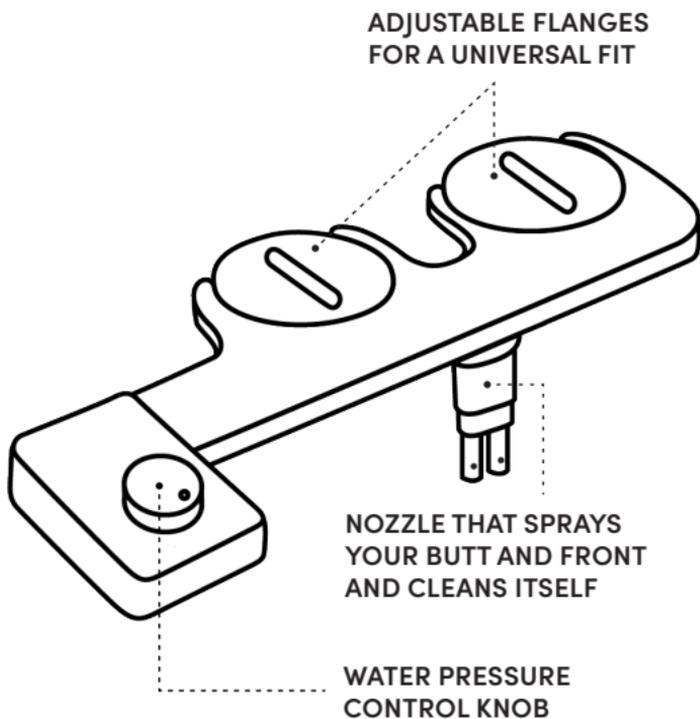

INCLUDED PARTS



Mega Adapter

(7/8" x 3/8" x 7/8" Compression)

Check that the black rubber gasket is present.



Flexible Hose

(2 Feet, 3/8" to 3/8" Compression)

TUSHY TIP:

Keep all of these parts (and this manual) just in case you need them in the future!

YOU MIGHT ALSO NEED



Flathead
Screwdriver



Phillips Head
Screwdriver



Towels

GETTING THIS POTTY STARTED

1.

TURN OFF WATER SUPPLY VALVE



Turn off the water valve beside the toilet by turning it clockwise.

TUSHY TIP:


If the valve is tight, there may be some mineral build up (white calcification). Slow and steady wins the race. If it's stuck, try twisting it in one direction and then the other, each time rotating a little further until it's free to turn all the way around.

2.

EMPTY THE TOILET TANK

Flush your toilet to drain the tank. Hold down that flusher until the tank empties nearly completely!


An inch of water at the bottom of the tank is okay, though.



3.

REMOVE THE TOILET SEAT

For most toilet seats, flip up the screw caps behind the seat with a flathead screwdriver to access the screws. Turn counterclockwise to loosen the screws. Remove the seat and set aside. You won't need the seat until Step 6.

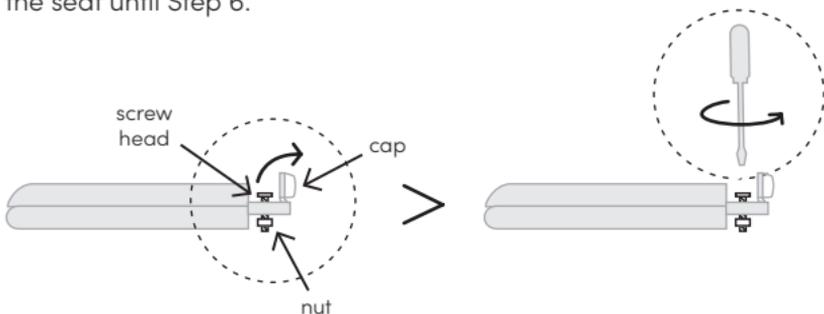

TUSHY TIP:

You may need to hold the nut on the underside of the screw with your other hand (using pliers or a towel) while unscrewing.

Dealing with a unique quick-release or mounted toilet seat?

There's a super easy fix. The quick-release mounts should be able to unscrew from the toilet. Just remove them and set them aside for now.

Check out [HELLOTUSHY.COM/MOUNTEDSEATS](https://www.hellotushy.com/mountedseats) for some video tips if you're having trouble.



TUSHY TIP:

If your toilet is dirty (hey, it happens!), it's the perfect time to clean it.