

A


CAUTION


- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED

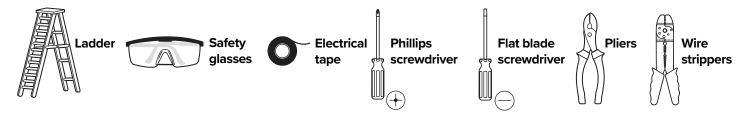

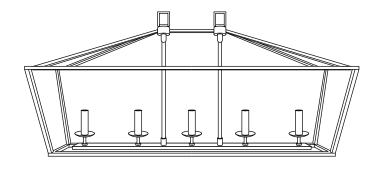





Fixture

Chains

Canopy



Mounting Unit



Mounting Screws



Wire Nuts




Cap Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


STEP 1

Secure the **chains** to the loops on the **canopy** and the loops on the **fixture**. Weave the branch wires through the **chain** and **canopy**.

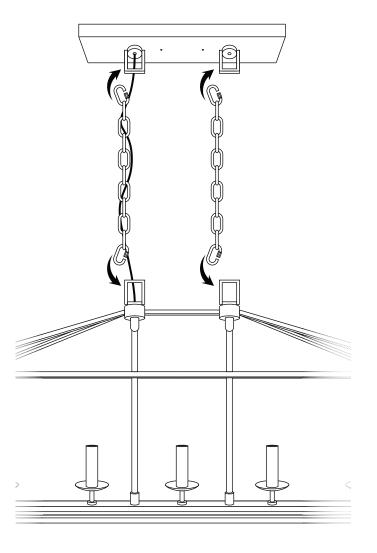

STEP 2

Use the $\mbox{\bf mounting screws}$ to attach the $\mbox{\bf mounting unit}$ to the junction box

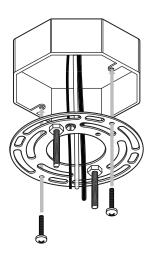

STEP 3


Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape


Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:


Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor




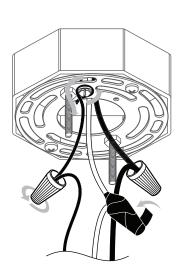

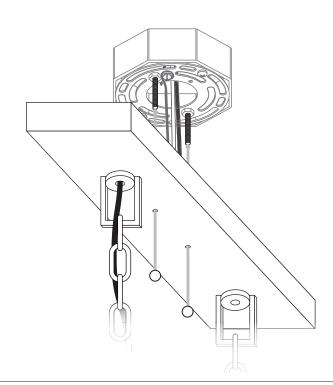

STEP 4

Place the **canopy** over the **mounting unit** and secure the **fixture** with the **cap nuts**.

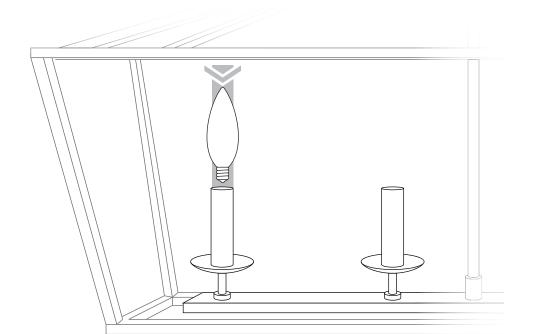

STEP 5
Install bulbs (not included)