



INSTALLATION INSTRUCTIONS


NO.7025

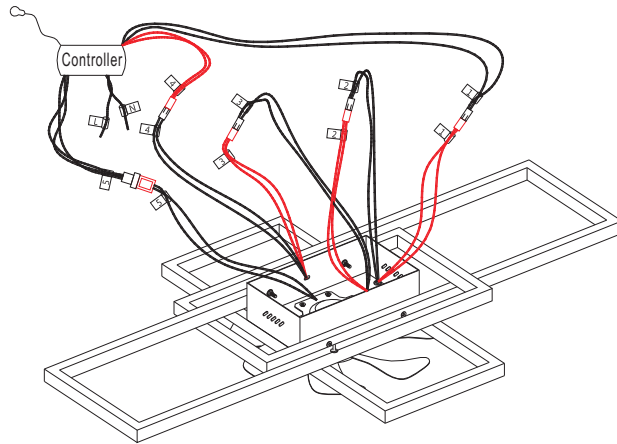


9. Connect and securely insert the No. 1, 2, 3, 4, 5 terminals on the controller to the corresponding output terminals of the lamp body.




10. Fix the mounting plate to the ceiling with special screws.

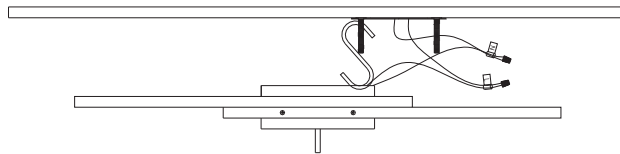


11. Hook the lamp body with the hook, and connect the controller to the main power lines L/N with power off.

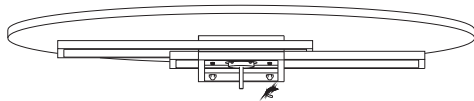



12. Align the lamp mounting plate holes with the ceiling plate holes, push flush to the ceiling, and tighten with M10 cap nuts.

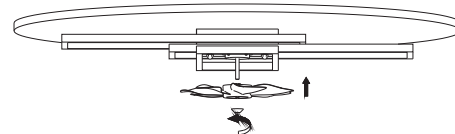

13. Install the fan blades and tighten the blade nut counterclockwise.



14. Lamp installation completed.

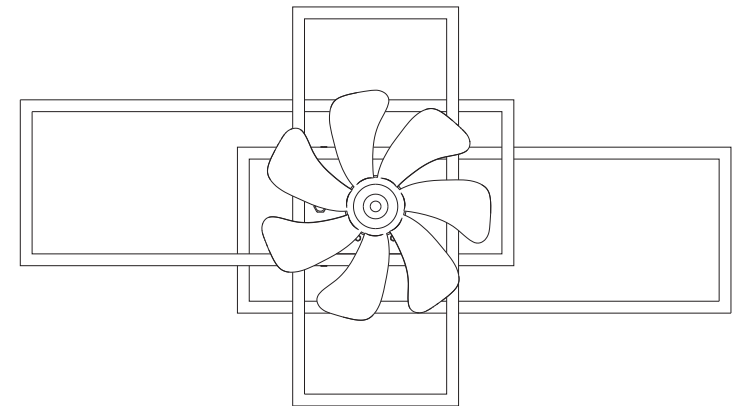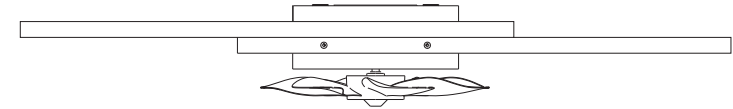

Please Scan the QR code to watch the installation video . If you have any questions, please feel free to contact us through the order page .








Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.



Warning!


1. Installation should be performed by a professional.
2. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3. This light fixture operates only within 110V-265V.
4. Do not install the light fixture in damp conditions.
5. Keep the light fixture away from acidic and corrosive materials.

Package Includes

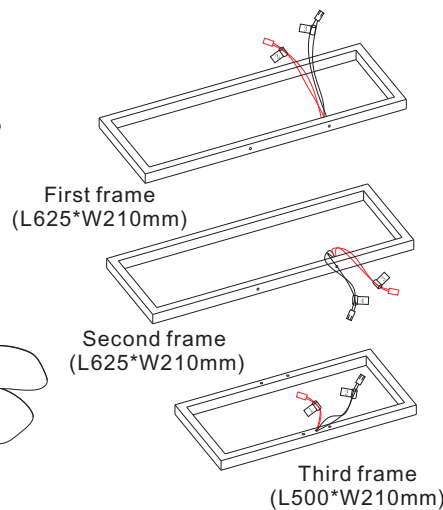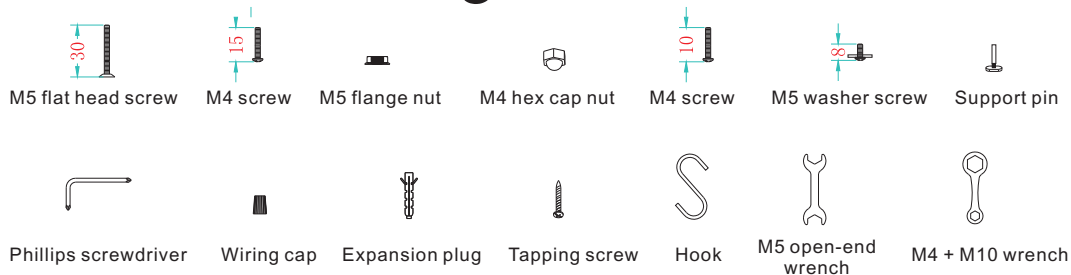


Installation Steps

1. Pass the lamp wire through the middle hole on the side of the ceiling plate, as shown in the diagram.

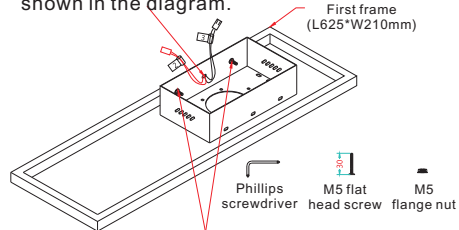


2. Fasten the first frame with M5*L30 screws + M5 flange nuts.

3. Pass the lamp wire through the bottom hole on the side of the ceiling plate, as shown in the diagram.

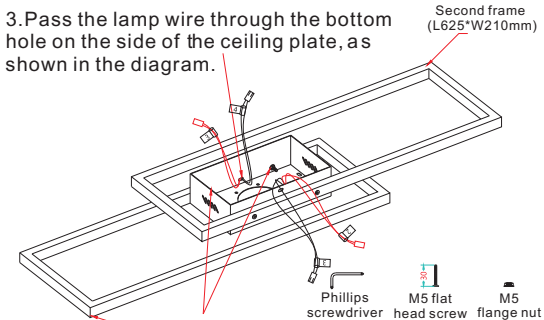


3. Fasten the second frame with M5*L30 screws + M5 flange nuts using a Phillips screwdriver.


5. Pass the lamp wire through the middle holes at both ends of the ceiling plate bottom, as shown in the diagram.

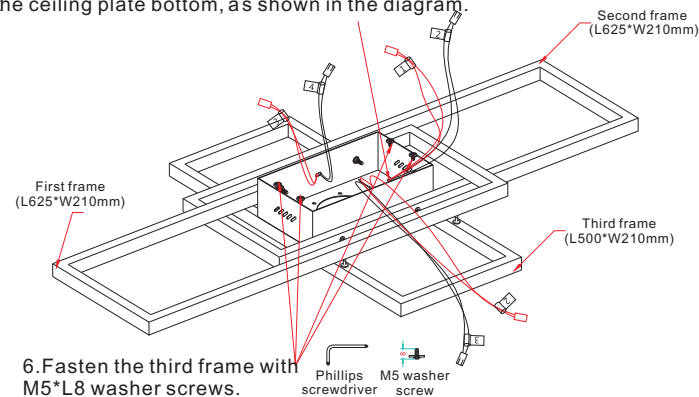

6. Fasten the third frame with M5*L8 washer screws.

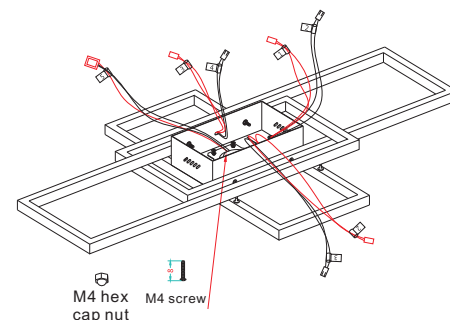

7. Fasten the fan motor to the ceiling plate with M4*L8 screws + M4 cap nuts.

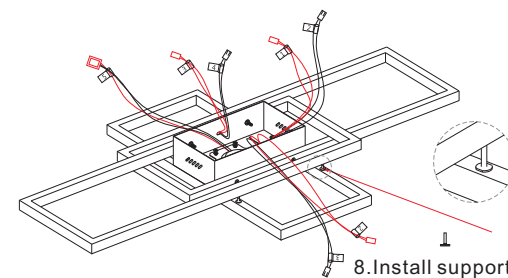

8. Install support pins between the first and third frames to prevent sagging.