


# L010008-D500-F1B

## —User Manual

Size:

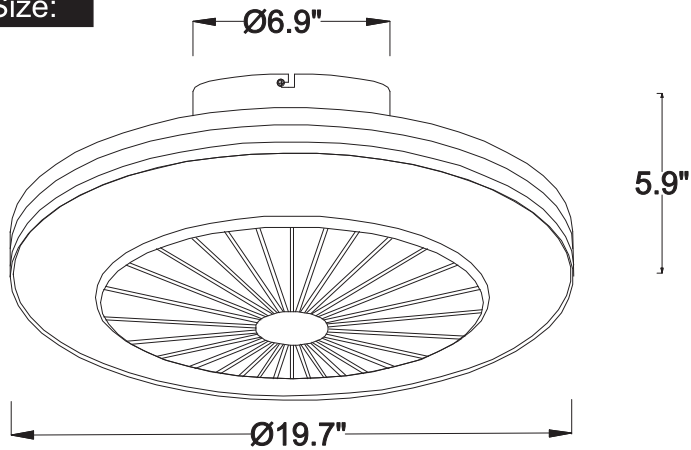

### Installation instructions:

1

Diagram of a circuit breaker panel. A switch is shown in the 'OFF' position. Labels 'A' and 'B' are present on the panel.

please confirm that the voltage matches the product, and turn off the power at the installation location to ensure safety.

2

Diagram showing a rectangular mounting plate being attached to a ceiling. Three screws are shown passing through the plate into the ceiling.

Securely attach the mounting plate to the ceiling.

3

Diagram of a lamp driver with two wires extending from it.

Connect the lamp driver input to the power source correctly and securely.

4

Diagram showing the lamp body being rotated to align the screws on the mounting plate with the holes on the leftmost hub.

Rotate the lamp body to align the screws on the mounting plate with the holes on the leftmost hub.

5

Diagram showing the lamp body being tightened to the mounting plate. Four screws are shown being tightened.

Tighten the four screws on the mounting plate to ensure the fixture is securely installed.

6

Diagram of a circuit breaker panel. A switch is shown in the 'ON' position. Label 'C' is present on the panel.

Turn on the power switch.


# 1.FanlampProAppInstructions


## 1.1.DownloadandinstallApp




## 1.2.Deviceconfigurationandcontrol


1.OpenyourPhoneBluetooth,thenopenFanlampProappadddevice'mylight'

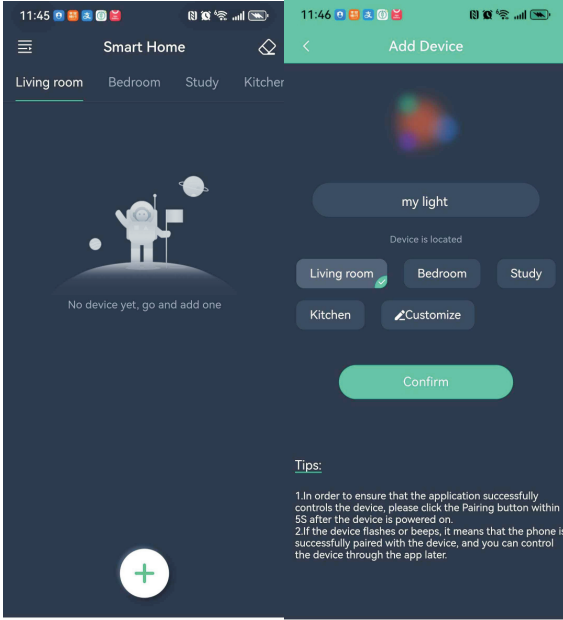

2.Turn onFanlight,thentap ,theFanlightflashes3timesquickly,thenletgo;

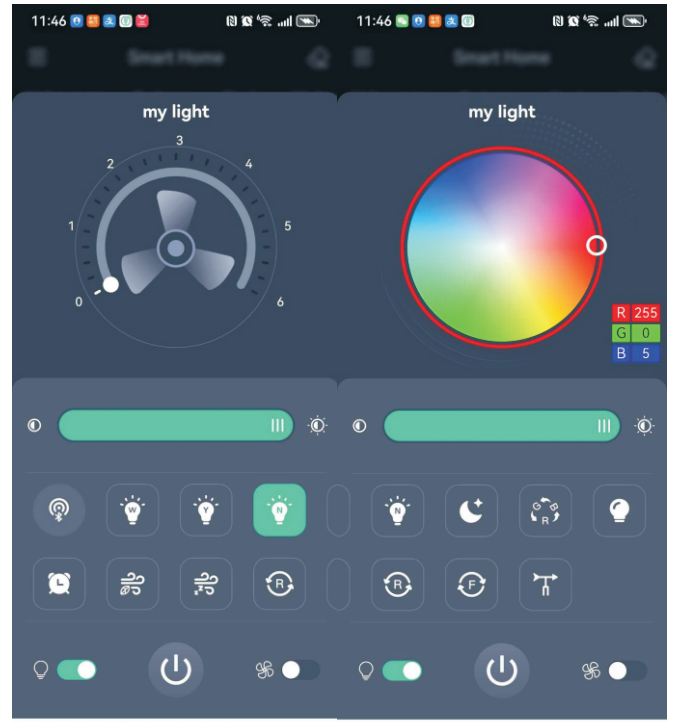

## 2.RemoteControlInstructions

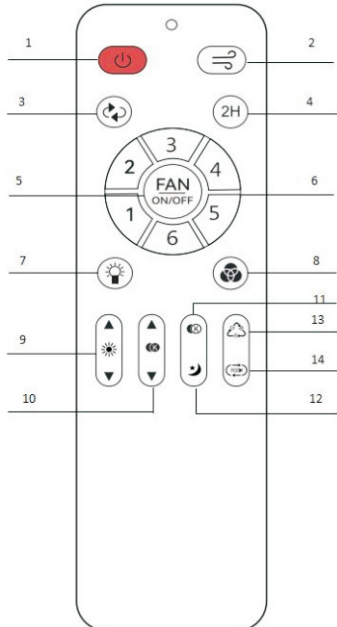

### 2.1.Pairc

Connectthedevice tothepowersupplyandconfirmthatthedevicecanworknormally(thelight turns onslowly);

Turnoffthepowerofthedevicefor5secondsandthenturnonthepoweragain;

LongpressButton1untilthedeviceflashes3timesquickly,thenletgo;

Thecodepairingoftheremotecontrolissuccessful.Atthistime,youcanpressthebuttonto controlthedevice.

### 2.2.Clearcode

Connectthedevice tothepowersupplyandconfirmthatthedevicecanworknormally(thelight turns onslowly);

Turnoffthepowerofthedevicefor5secondsandthenturnonthepoweragain;

LongpressButton2untilthedeviceflashes3timesquickly,thenletgo;

Theremotecontrolissuccessfullycleared.Atthistime,theremotecontrolcannolongercontrol thedeviceandneedstobere-pairedbeforeitcanbeused.

### 2.3.Control

- Button1:All off,shortpresstoturnoffthemainlight&colorlight&fan;
- Button2:Fanmode,shortpresstoswitchbetweennaturalandcomfortablewind;
- Button3:Fandirection,shortpresstoswitchbetweenforwardandreverse;
- Button4:2hourscountdowntimeroff,fan&whitelight&colorlightalloffatthesametime;
- Button5:Fanswitch,shortpresstoturnon/offthefan;
- Button6:Fanspeed,shortpresstoadjustthespeedof6levels;
- Button7:Whitelightswitch,shortpresstoturnon/offthewhitelight;
- Button8:Colorlightswitch,shortpresstoturnon/offcolorlight;
- Button9:Brightnessadditionandsubtraction,shortpresstoadjustthebrightnessof10levels, andlongpresstoadjustthebrightnesssteplessly;
- Button 10: Addition and subtraction of temperature, short press to adjust the 10-level temperature,longpresstoadjustthetemperaturesteplessly;
- Button11:switchdifferentColorTemperature:Warm white/White/Coolwhite;
- Button12:Nightlightmode;
- Button13:Colorstaticcycleswitching(red,yellow,green,blue,purple,white);
- Button14:Colordynamiccycleswitching.