

# **LED LIGHTED MIRROR**





x2








### **TOOLS REQUIRED**





1/4" Drill Bit











Model #59002, 59003

**SAFETY INSTRUCTIONS** 

Read instructions completely before installing the mirror.

#### **WARNING:**


- If the colors of the household supply wires are different than what is referred to in the instructions below, a professional electrician should determine proper wiring.
- An electrical mirror must be wired to a 20 amp GFCI (Ground Fault Circuit Interruptor) when used in a bathroom and all other locations required by the National Electrical Code.

#### **CAUTION:**


- Rated for damp locations. Not suitable for outdoor use.
- Be sure the outlet box is properly grounded or that a green or bare (ground) wire is present.
- You may need a second person to support the mirror during installation.

### **ASSEMBLY INSTRUCTIONS**


1. Turn off circuit breakers and wall switch to the mirror. **A DANGER:** Failure to disconnect power supply prior to installation may result in serious injury or death.




6. Use 4 screws from hardware bag to install the mounting bracket.




2. Determine the orientation of the mirror. The mirror can be mounted either direction--vertical or horizontal.




7. Secure all wire connections with wire connectors according to diagram and these steps:





• Connect the White wire from the fixture to the White (neutral) supply wire.

Note: If household supply wires are different colors than referred to above, it is recommended a professional electrician determines the proper wiring.




(not included) to mark the location of the pilot holes. Note: Use the longer mounting bracket for horizontal mount or use the shorter mounting bracket for vertical mount.

to drill the pilot holes for the drywall


anchors.

3. Use a mounting bracket and a level

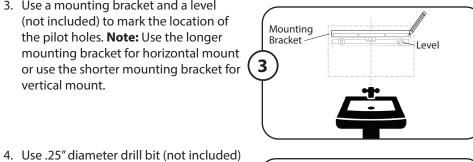


.25" Pilot Hole

8. Lift the mirror onto the mounting bracket. Note: Ensure the bracket preassembled to the back of the mirror interlocks with the mounting bracket on the wall.




5. Use a hammer (not included) to tap the

drywall anchors into the pilot holes.




9. Turn on power supply at the breaker box and wall switch to the mirror.



## **OPERATING INSTRUCTIONS**

Light Control - Tap button to turn off/on. Press and hold to dim. Note: When power is turned on, the light will come on at the last setting.

Anti-fog feature: The anti-fog will automatically activate when mirror light is turned on.



## **3-YEAR LIMITED WARRANTY**

To obtain service, please contact Customer Service: 1-877-706-3267, 8 a.m. - 5 p.m. Central Time, Monday - Friday.

The manufacturer warrants all of its mirrors against defects in materials and workmanship for three (3) years from the date of purchase. If within this period the product is found to be defective, take a copy of the bill of sale as a proof of purchase and the product in its original carton to the place of purchase. The manufacturer will, at its option, repair, replace or refund the purchase price to the consumer. All costs of installation and removal of the fixture is the responsibility of the consumer. This warranty does not cover fixtures becoming defective due to misuse, accidental damage or improper handling and/or installation and specifically excludes liability for direct, incidental or consequential damages. As some states do not allow exclusions of limitations on an implied warranty, the above exclusion and limitation may not apply. This warranty gives you specific rights and you may also have other rights which may vary from state to state.