

Sia 6636 WHIRLPOOL BATH

GM55 Sia 6636 Whirlpool Bath

- Center Drain Location
- Accessories / Hardware:

Rotary Drain 26-inch cable 8730 21-inch straight pillow EK91959

• Finishes Available:

(827) - Chrome

(898) - Brushed Chrome


(815) - Satin Nickel

(829) - Bright Brass

(805) - Platinum

(826) - Brushed Nickel

(845) - Oil Rubbed Bronze

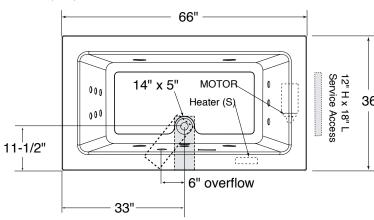

Product Shown: Sia 6636 Whirlpool Bath (GM55) Shown.

* Measurements inside unit represent cutout in floor to allow for drain/overflow.

Minimum Service Access dimensions given.

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS

66" L x 36" W x 24" H (1676 mm) L x (914 mm) W x (609 mm) H

DRAIN/OVERFLOW

A: 17-3/4" (451 mm) B: 11-1/2" (292 mm)

CUTOUT

Template provided Part Number GU50000 (undermount) 64" x 34" (1626 mm x 864 mm)

TOTAL WEIGHT

1080 lb (4453 kg) / 66 lb/sq. ft. (322 kg/m²)

36" OPERATING GALLONAGE

Min. - 67 U.S. Gal. (254 Liters) Max. - 76 U.S. Gal. (288 Liters)

PRODUCT WEIGHT

150 lb (68 kg)

SKIRT MOUNTING

Not Available

ELECTRICAL SPECIFICATIONS

Requires a dedicated GFCI protected separate circuit.

Motor/Pump: 120 VAC, 20 AMP, 60 Hz. RapidHeat™ Heater: 120 VAC, 15 AMP, 60 Hz.

HEATER (Standard)

Requires a dedicated GFCI protected separate circuit RapidHeat™ #S750000

