





see what Delta can do™

TUB AND SHOWER FAUCET TRIM

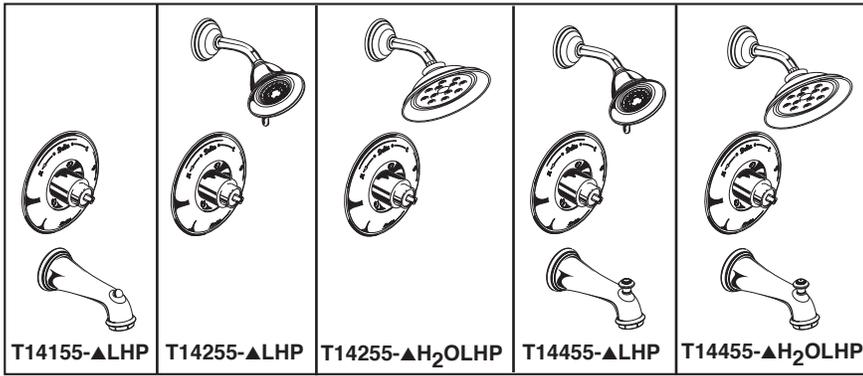

Submitted Model No.: _____

Specific Features:

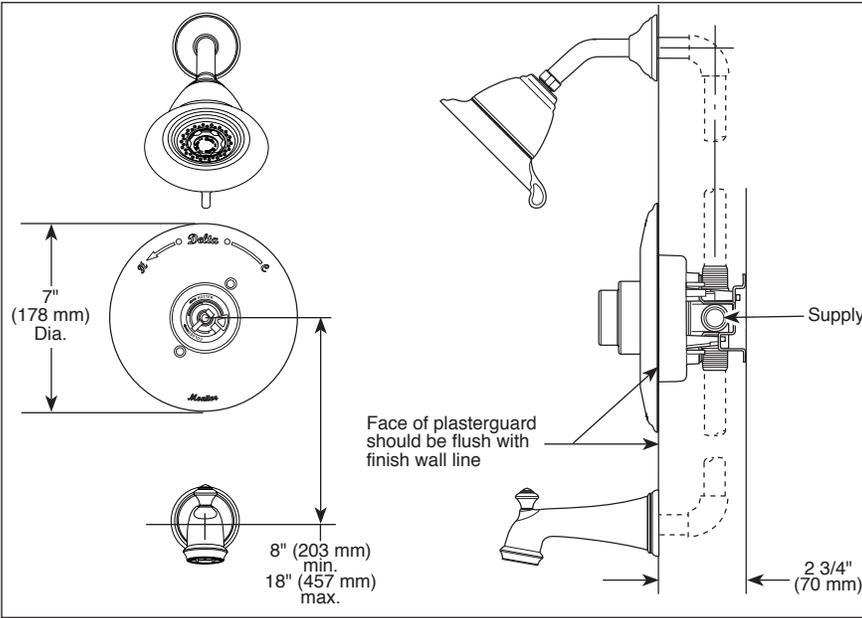

<p>RP34357▲ (Pull-Up Diverter)</p> <p>3 1/8" (79 mm) 6 1/2" (165 mm)</p>	<p>H716▲</p> <p>3" (76 mm)</p>	<p>RP34355▲ 2.5 GPM Dual Spray Touch-Clean® Shower Head</p> <p>4 1/4" (108 mm) 5 1/2" (140 mm)</p> <p>Full Spray Massage Spray</p>
<p>RP43028▲ (Non-Diverter)</p> <p>3 1/8" (79 mm) 6 1/2" (165 mm)</p>	<p>H712▲</p> <p>2 3/8" (60 mm)</p>	<p>RP70172▲ 1.75 GPM H₂O Shower Head</p> <p>3 13/32" (86 mm) 7 29/32" (201 mm)</p> <p>Full Spray</p>
<p>RP34359▲</p> <p>8 5/8" (218.4 mm) 7 3/4" (197 mm)</p>		<p>RP77991 Available Extension Kit</p>

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T14155-LHP Rev. I

FEATURES:

- Monitor® 14 Series pressure balanced bath mixing valve trim
- "-H2O" models include H₂O Kinetic® Technology shower head

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Back-to-back installation capability
- Solid brass forged body
- Temperature only controlled with handle
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- 2.5 gpm @ 80 psi for standard models and 1.75 gpm @ 80 psi for models with -H2O suffix
- Tub port maximum flow rate 6.0 gpm @ 60 psi with R10000-UNBX
- Shower arm overall horizontal length = 5 1/2" (138 mm), including threaded ends
- Decorative trim ring available as RP34359
- LHP - less handle program - see recommended handles below
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness. RP77991 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- EPA WaterSense® - Applies to T14255-H2OLHP, T14455-H2OLHP, & RP70172 only

Delta Faucet Company

55 E 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2018 Delta Faucet Company