# **Composed®**

# KOHLER Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm

K-73060-4

#### **Features**

- Two Lever handles offer separate control of hot and cold
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- 5-15/16" (151 mm) spout reach
- UltraGlide® valves with dry-stem technology are designed to eliminate common leak paths and provide smooth, effortless control
- Includes pop-up drain with 1-1/4" (32 mm) tailpiece
- Coordinates with Composed faucets, accessories, and showering components to complete your bathroom

#### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

### Installation

- For 8" 16" (203 406 mm) centers
- Handles are preassembled on valves to simplify installation
- Quick-connect fittings make installation easy

### Recommended Products/Accessories

K-23726 Drain treatment

K-73141 18" Towel Bar

K-73142 24" Towel Bar

K-73144 24" Double Towel Bar

K-73145 towel arm

K-73146 Double Robe Hook

K-73147 Pivoting toilet paper holder

K-73148 Vertical toilet paper holder





### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA

ICC/ANSI A117.1 CSA B651

OBC

## **KOHLER® Faucet Lifetime Limited** Warrantv

See website for detailed warranty information.

### Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	AF	Vibrant® French Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass



# **Composed®**

# KOHLER Faucets Widespread bathroom sink faucet with Lever handles, 1.2 gpm K-73060-4

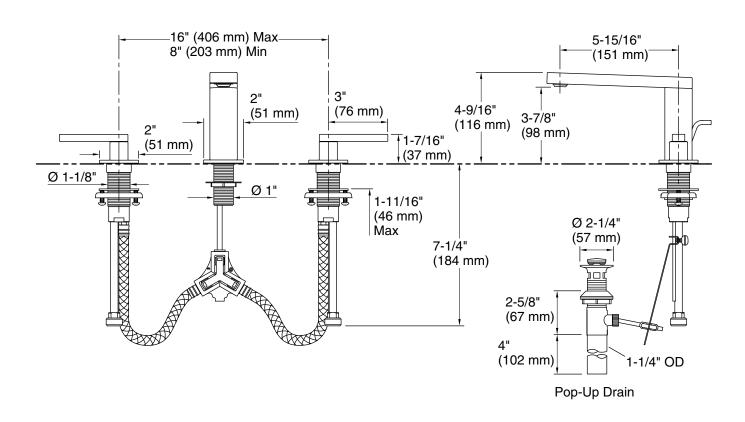

### **Technical Information**

All product dimensions are nominal.

1.2 gal/min (4.5 l/min) Faucet flow rate:

Drain included: Yes Drain with overflow: Yes Drain tailpiece Yes

included:

Spout:

Spout reach: 5-15/16" (151 mm)

#### **Notes**

Install this product according to the installation guide.

ADA compliant for handles only. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

