


LF-049-ADCC Finish(CC) ☐

LF-049-ADGS Finish(GS) ☐

LF-049-ADYY Finish(YY) ☐

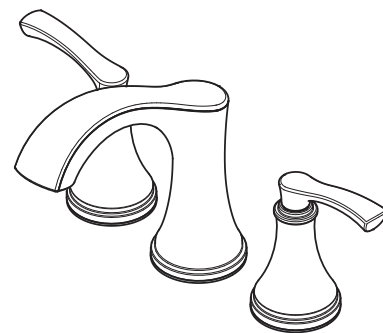

Specifications

Features

- 1.2 GPM Flow Rate
- Spot Defense Finish Resists Spots and Fingerprints (GS Finish Only)
- Adjustable 3-Hole Installation
- Fixed Hubs
- Quick Install Tool Included
- Pfaster Connect™ Adapters
- TiteSeal™ Technology
- Push & Seal™ Pop-Up
- Pforever Seal™ Ceramic Disc Valves
- Limited Lifetime Warranty



Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- EPA WaterSense Certified
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

