


## LP8333\*\* 52" Ceiling Fan

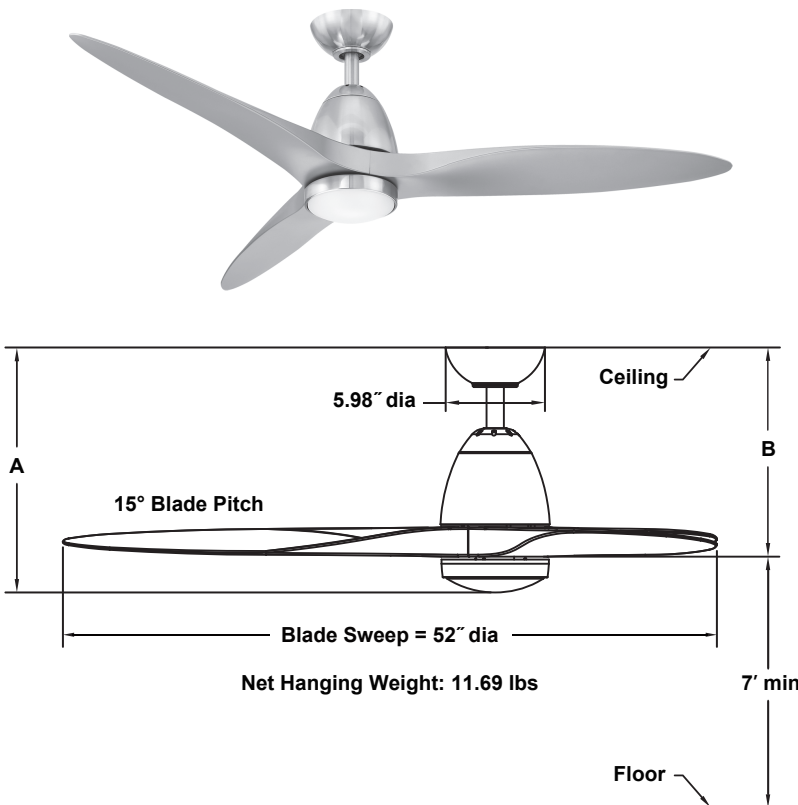

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

DC125-20NS sensorless DC motor is designed for optimal performance with this fan.

### BLADE SET:

A set of three 25" composite blades is included.

### CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

### LIGHTING OPTIONS:

One 18-watt CCT LED (3000K/4000K/5000K) included.

### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 12" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.

	A	B
Fan w/4.5" downrod	14.81"	12.67"
Fan w/12" downrod	22.31"	20.17"
Fan w/18" downrod	28.31"	26.17"
Fan w/24" downrod	34.31"	32.17"
Fan w/36" downrod	46.31"	44.17"
Fan w/48" downrod	58.31"	56.17"
Fan w/60" downrod	70.31"	68.17"
Fan w/72" downrod	82.31"	80.17"

### Available Finishes

LBN	Brushed Nickel with Gray Blades and Opal Frosted Shade
LBS	Brushed Satin Brass with Matte White Blades and Opal Frosted Shade

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	174	4560	203	0.31	22
Med (9 <sup>th</sup> )	116	2977	408	0.12	7
Low (1 <sup>th</sup> )	49	1153	501	0.05	2

### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
16	2965	5	181

### Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1600	3000/4000/5000	90%