



5022 Joanne Kearney Blvd.
Tampa, FL 33619

Phone: 813.349.1900
Fax: 813.349.1907

Version: A
Release Date:
2017-04-20

MAINTENANCE AND CARE:

Disconnect the product from the power supply before cleaning or maintenance.

Installation Instructions for Karpo Single Spot




Safety Information

1. This luminaire must be installed in accordance with the National Electrical Code and local electrical and construction regulations. To assure full compliance with local code and regulations, check with your local electrical inspector before installation.
2. To prevent electrical shock, turn off electrical breaker and branch circuit switch.
3. Do not exceed specified luminaire voltage. Use of any other source will void warranty.
4. Do not install if luminaire, parts, or connectors are damaged.
5. Product must be installed with provided drivers and housings only. Use of other manufactures components will void warranty.

Warning:

This product contains chemicals known to the state of California to cause cancer, birth defects, and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

INSTALLATION STEPS

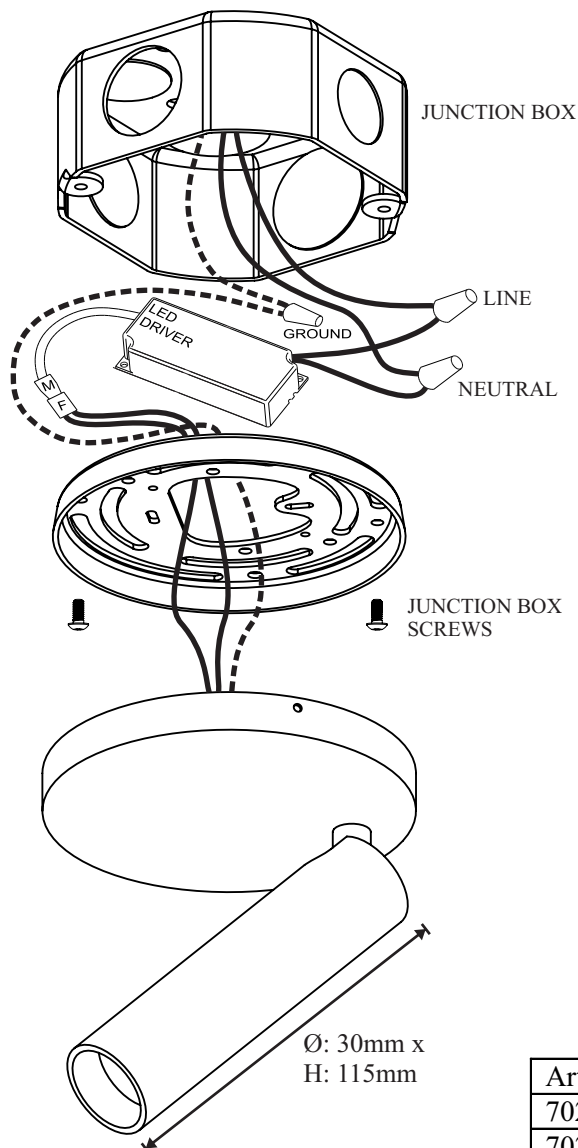

- 1) Locate the LED driver and prepare for remote installation within the junction box.
- 2) Using UL recognized wire nuts connect the building power wires to the LED driver.
- 3) Place LED driver into the Junction Box. 4 inch octagon box only.
- 4) Locate the mounting plate and LED module. Feed the LED module connector and ground wire through the mounting plate center hole.
- 5) Connect the LED driver (male connector) to the LED module (female connector.)
 - a. IMPORTANT - DO NOT connect fixture to a driver that is energized/powering on. Connect LED driver to the fixture before powering on the LED driver.
- 6) Use UL recognized wire nuts to secure LED module Ground to building Ground (Earth).
- 7) Secure mounting plate to junction box with (2) junction box screws.
- 8) Secure LED module to mounting plate with (2) allen wrench set screws.

Article Number	CCT	Canopy Dimensions
702250U/51U/52U/53U	3000K	Ø:108mm x H:13mm
702254U/55U/56U/57U	4000K	