



60" x 30" alcove bath, right drain K-1121-R

#### **Features**

- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation

# Material

Acrylic

#### Installation

- Right drain
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately)
- Alcove

# **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

# **Recommended Products/Accessories**

K-1491 Bath/Whirlpool Pillow K-1601 Bath/whirlpool footstop, removable K-23726 Drain treatment

# ADA

# Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 ADA ICC/ANSI A117.1

# **KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty**

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	95	Ice™ Grey
	7	Black Black™





**Underscore®** 

60" x 30" alcove bath, right drain K-1121-R

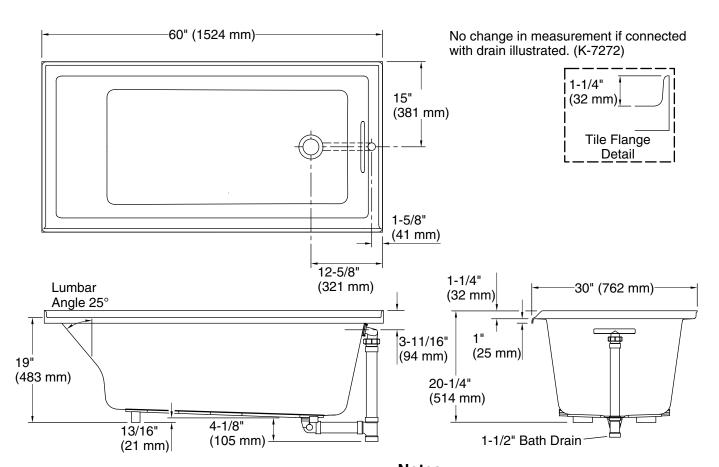

# **Technical Information**

**KOHLER** 

All product dimensions are nominal.

Drain location: Right

Basin area, bottom: 42-7/16" x 20" (1078 mm x 508 mm)

Basin area, top: 54-5/16" x 24-1/4" (1380 mm x 616 mm)

Weight: 75 lbs (34 kg)

Minimum floor load: 42 lbs/ft<sup>2</sup> (205.1 kg/m<sup>2</sup>)

Water depth: 15-1/8" (384 mm)
Water capacity: 59.8 gal (226.4 L)
Minimum flat for 1-15/16" (49 mm)

door:

# **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific

requirements of these regulations.

