
## **Instruction Manual**

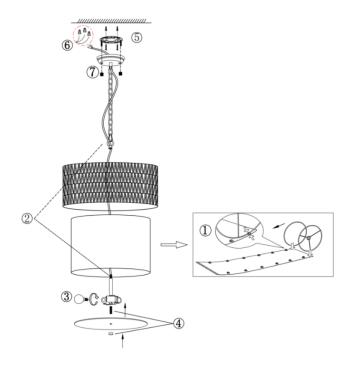

## **INFORMATION AND PACKAGE**

Specification		
Voltage	110-120V	
Bulb Socket	E26	
Wattage	40W	
Bulb Type	Incandescent, Halogen Bulb	
Certification	Incandescent/LED/Halogen (Not Included)	
Warranty	2 Years	

Package List	
ceiling tray and hanging chain	1
paper rattan shade	1
cloth cover	1
lamp holder	1
Soft light plate	1
Instructions and accessories	1
Circular iron ring	2

## A LETTER TO MY PRECIOUS CUSTOMER

Dear Customer.

Thanks for choosing this light! If you have any issue when you receive it, please contact us directly through "Contact Seller". We will offer a proper solution ASAP once receive your message. Basically, we provide online customer service during PDT 6:00pm~9:00pm (EDT 9:00pm~00:00am) from Monday to Friday. So, do not hesitate to contact us during this time frame, we will reply to you in 30 mins!

- Customer Support Team

## **INSTALLATION STEPS**

- (1) Fix the circular iron ring on the buckles at the top and bottom of the cloth cover, Cloth covers surround the iron frame to form a cloth cover.
- (2) Pass the wires on the lamp holder through the cloth sleeve and the paper rattan sleeve in turn, fix the cloth sleeve, the paper rattan sleeve and the lamp holder with iron rings, and then re-tie the hanging chain on the iron rings after fixing.
- (3) Install E26 bulbs.
- (4) Remove the nut from the screw, Install the threaded rod under the lamp holder, tear off the films on both sides of the acrylic plate, and then install it at the lower end of the lamp cap with nuts.
- (5) Use the screws to mount the bracket on the junction box. (If you don't have a junction box, you can drill two holes in the wall and put in two expansion pellets, and finally fix the bracket with self-tapping screws)
- (6) Connect the "L" wire to your "live" wire through the orange terminal caps and the "N" w ire toyour "neutral" wire, the copper wire needs to be wrapped around the green screw on the iron plate.
- (7) Use the matching nut to fix the ceiling tray on the junction box.