


TL-SLM4-CCT5-90WH

4" THINLED PRO, CCT Selectable

TRENTZTM
LIGHTING

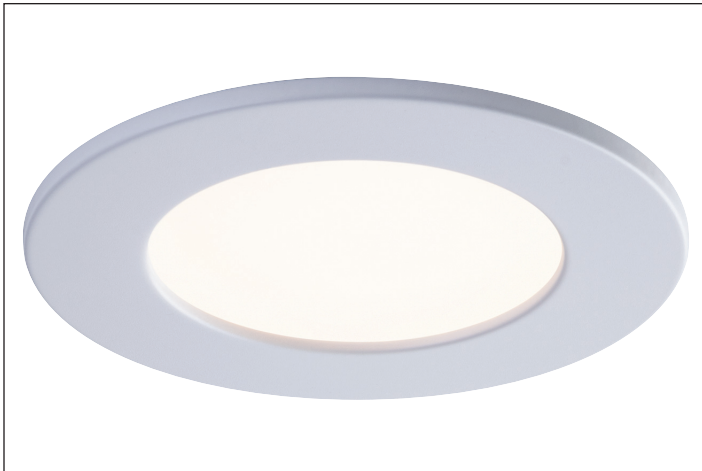

Description

4" Slim profile light fixture for recess retrofit applications in wet locations. It is a high performance, easy to install residential grade downlight solution that offers good light output, energy-efficient and streamlined design with interchangeable color trims and CCT selecting switch. Suitable for wet locations.

TECHNICAL DATA	
Application	Ceiling Recess Mount
Approved Location	Wet / Insulated Ceiling
Beam Angle	110°
CCT	2700 K / 3000 K / 3500 K / 4000 K / 5000 K (via CCT switch)
Certification	cETLus
Class II	Yes
Color	White (other accessory colors available)
CRI	90
Dimming	Yes
Dimming Technology	Forward/Reverse phase / TRIAC / ELV
Input	100-135V AC, 60 Hz
Lumens	Up to 750
Lumens per Watt	Up to 67
Power Factor	>0.9
Projected Lumen Maintenance	70% @ 50,000 hours
Warranty	Lifetime
Wattage	12W

Notes: Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Features

Body

Durable airtight aluminum body with UV stable paint and white PMMA diffuser lens for low glare. Includes silicone gasket for wet location applications. Interchangeable magnetic trim.

LED Characteristics

This general application light fixture features a 12 watt LED module that maintains intensity producing up to 750 lumens; with a typical CRI of 90. Available with 5 step CCT switch (2700 K, 3000 K, 3500 K, 4000 K, 5000 K).

Dimming

100%-10% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers (contact factory for listing of compatible dimmers).

Beam Spread

The fixture lens provides 110° beam spread.

Mounting

Includes two spring loaded clips to attach to any ceiling material. The slim profile allows to be mounted under joists or duct work.

LED Driver

Extruded aluminum hardwire box with 300mA dimmable class II electronic LED driver with 100-135V AC input. Includes an 18" wire with DC 2.1 connector from driver to fixture.

Quick Connect Push-in Terminals


Three "Quick Connect" push-in terminals for fast and easy wiring.

Operating Temperature

-30°C~40°C (-22°F~104°F).

Environment

Suitable for wet locations. Suitable for insulated ceiling applications.

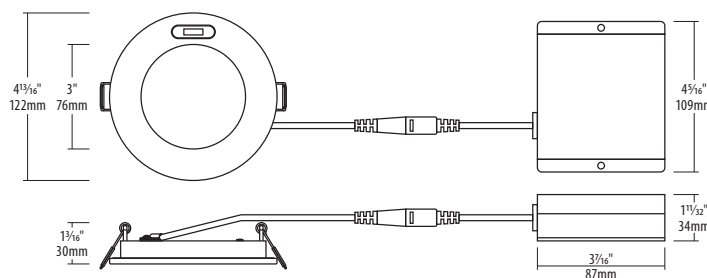

Accessories



TL-SLM4-RT-BK
Black round faceplate.



TL-SLM4-RT-BN
Brushed Nickel round faceplate.



TL-SLM4-RT-OB
Oil Rubbed Bronze round faceplate.



A division of
Une division de

LITELINE CORPORATION
P 416-996-1856 | 1-866-730-7704
F 905-709-5255 | 1-888-738-9736

Copyright © 2020, Liteline Corporation. All rights reserved.