

## INNOVATIVE SOLUTIONS FOR CERAMIC AND STONE TILE

### SHOWER DRAINS FOR BONDED WATERPROOF MEMBRANES


Schluter®-KERDI-DRAIN, Schluter®-KERDI-DRAIN-H, Schluter®-KERDI-LINE, and Schluter®-KERDI-LINE-VARIO shower drains provide a simple and secure connection to bonded waterproof membranes at the top of the assembly via an integrated bonding flange. Thus, the membrane is applied entirely at the surface, with all water directed into the top of the drain.

#### Application and Function


Schluter®-KERDI-DRAIN, Schluter®-KERDI-DRAIN-H, Schluter®-KERDI-LINE, and Schluter®-KERDI-LINE-VARIO are specifically designed for use in bonded waterproofing assemblies, such as showers, steam rooms, wet rooms, and other applications that require waterproofing and drainage.

**8.2 Schluter®-KERDI-DRAIN** is a shower drain specifically designed to allow connections to Schluter®-KERDI or other load-bearing, bonded waterproof membranes. The membrane is adhered to the large integrated bonding flange to form a waterproof connection at the top of the drain assembly. KERDI-DRAIN consists of a drain casing and fully adjustable grate assembly or covering support to which tile is applied. The grate assembly accommodates a wide range of tile thicknesses and allows lateral and tilt adjustment as well. The covering support is placed flush with the top of the bonding flange and can therefore accommodate any thickness tile covering.


The standard KERDI-DRAIN is attached directly to the waste line. The drain casing is available in ABS, PVC, or stainless steel. The plastic drain casings feature a fleece-covered bonding flange. They are available with standard 2" (50 mm) and 3" (75 mm) outlets and attached to the pipe using an appropriate solvent cement. The stainless steel drain casings are available with standard 2" (50 mm) and 3" (75 mm) no-hub outlets and 2" (50 mm) threaded outlet. The no-hub outlets are attached to the pipe using an appropriate mechanical (e.g., flexible or no-hub) coupling. The threaded outlets are attached to the pipe using thread sealing.

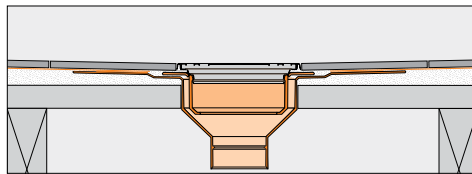


**8.2 Schluter®-KERDI-DRAIN**

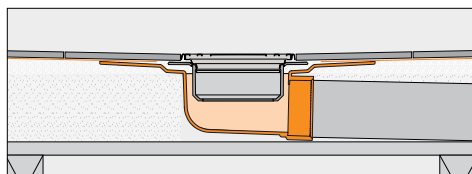


**8.2 Schluter®-KERDI-DRAIN-H**

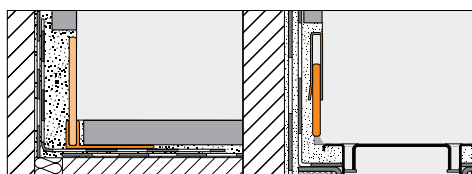

**8.2 Schluter®-SHOWERPROFILE-S/-R**

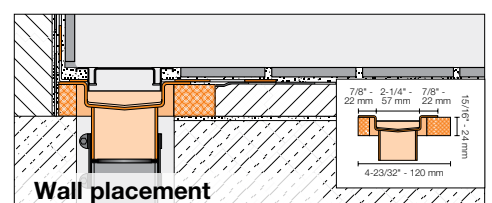


**Wall placement**

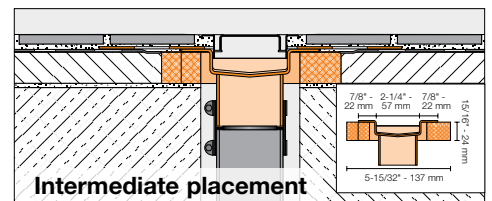

**Intermediate placement**

**8.7 Schluter®-KERDI-LINE**

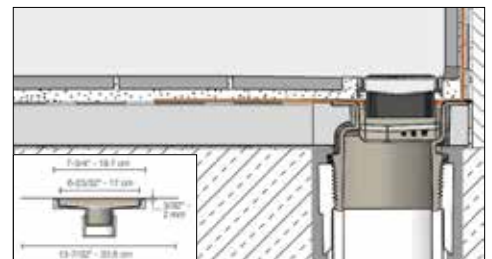

**8.8 Schluter®-KERDI-LINE-VARIO**



compound or tape. The simple connection to standard drain outlets makes KERDI-DRAIN suitable for new construction and renovation.

The KERDI-DRAIN-A adaptor kit is designed to convert clamping ring drains by equipping them with an integrated bonding flange. The adaptor kit includes a steel adaptor ring with an over-molded rubber gasket and a variety of perforated hole patterns that align with most common clamping ring shower drains. The adaptor ring replaces the clamping ring and is attached to the drain body using the clamping ring bolts. This connection is made watertight via the rubber gasket and Schluter®-KERDI-FIX adhesive/sealant. The integrated bonding flange slides into the adaptor ring, with the over-molded rubber gasket ensuring a watertight seal. KERDI-DRAIN-A adaptor kits, available in 5-1/2" (139.7 mm) and 7-1/2" (191 mm) diameter sizes, are used to convert traditional clamping ring drains to integrated bonding flange drains when removal of the clamping ring drain is not practical (e.g., when they are set in concrete slabs). Adaptor kits are suitable for both mortar beds and KERDI-SHOWER-T/-TS/-TT shower tray applications.

The KERDI-DRAIN grate assembly consists of a frame, which can be seamlessly adjusted to the thickness and layout of the ceramic tile or stone covering via the height adjustment collar and lateral adjustment ring and grates or cleanout covers that are placed within the frame. The 4" (100 mm) standard grate assembly frame features an approximately 1/8" (3 mm) wide reveal after installation and grate/frame combinations are available in stainless steel in CLASSIC design or anodized aluminum in CONTOUR design, both available in a variety of finishes. The 4" (100 mm) KERDI-DRAIN-STYLE grate assembly frame features a minimal reveal after installation. It is made of brushed stainless steel and can be combined with one of three grate design options: FLORAL (E), CURVE (F), or PURE (G). Various metallic and color-coated finishes are available. The 4" (100 mm) TILE grate is a square stainless steel plate with KERDI laminated on the surface to allow for bonding of ceramic or stone tile, which creates a virtually invisible drainage line. The 6" (150 mm) square and round stainless steel grate assembly frames feature an approximately 3/16" (5 mm) wide reveal after installation and can be combined with stainless steel grates in CLASSIC design or a square cleanout cover. Please note that 6" (150 mm) grate assemblies and grate assemblies used with the 5-1/2" (139.7 mm) adaptor kits only allow vertical and tilt adjustment (no lateral adjustment).

**Schluter®-KERDI-DRAIN-H** is a shower drain with an integrated bonding flange that

provides as large contact area for a secure connection to Schluter®-KERDI waterproofing membrane at the top of the assembly. KERDI-DRAIN-H is appropriate for both mortar bed and Schluter®-KERDI-SHOWER-T/-TS/-TT shower tray applications. The bonding flange is sloped to simplify installation of the mortar bed. KERDI-DRAIN-H provides a horizontal connection to the drain pipe and is available in ABS or PVC with a 2" (50 mm) outlet. It is ideal for applications where the use of a vertical connection to the drain pipe is not possible or practical (e.g., suspended or post-tension concrete floors, basement slabs, or wood floor installations where relocating the hole in the floor is not practical). The horizontal outlet allows the positioning of the drain in the desired area regardless of drain pipe location. A compensation board is available for use with KERDI-DRAIN-H in conjunction with the KERDISHOWER-T/-TS/-TT shower trays. KERDI-DRAIN-H is compatible with the standard KERDI-DRAIN grate options. Please refer to the previous section on KERDI-DRAIN for details.

**8.7 Schluter®-KERDI-LINE** is a low profile linear shower drain specifically designed for bonded waterproofing assemblies. KERDI-LINE can be installed adjacent to walls or at intermediate locations. The shower floor can be sloped on a single plane to KERDI-LINE, which enables the use of large-format tiles and creates interesting design opportunities.

KERDI-LINE consists of a formed stainless steel channel body and grate assembly or covering support to which tile is applied.

The channel body features a standard 2" (50 mm) no-hub outlet and is attached to the pipe using an appropriate mechanical (e.g., flexible or no-hub) coupling. The simple connection to standard drain outlets makes KERDI-LINE suitable for new construction and renovation. KERDI-LINE is available with both center and off-set outlets. The off-set outlet is located 8" (20.3 cm) from the edge of the channel body and provides flexibility when obstacles (e.g., floor joists) are encountered during installation. KERDI-LINE includes a corresponding polystyrene foam channel support to set the drain elevation to the corresponding KERDI-SHOWER-LT/-LTS shower trays. The perimeter of the channel body consists of a bonding flange laminated with a collar made of KERDI. It ensures a simple and secure connection to the bonded waterproofing assembly, both in the floor area and on adjacent walls. KERDI-LINE is available in channel lengths from 20" to 72" (50 cm to 180 cm) in 4" (10 cm) increments. The bonding flange extends approximately 1" (2.5 cm) beyond the channel on all sides.

The KERDI-LINE-A adaptor kit is designed to convert clamping ring drains to accommodate the KERDI-LINE channel body when removal of the clamping ring drain is not practical (e.g., when they are set in concrete slabs). The adaptor kit includes a steel adaptor ring, available in 5-1/2" (139.7 mm) diameter, with an over-molded rubber gasket and a variety of perforated hole patterns that align with most common clamping ring shower drains. The adaptor ring replaces the clamping ring and is attached to the drain body using the clamping ring bolts. This connection is made watertight via the rubber gasket and Schluter®-KERDI-FIX adhesive/sealant. The KERDI-LINE channel body outlet slides into the adaptor ring, with the over-molded rubber gasket ensuring a watertight seal. Adaptor kits are suitable for both mortar beds and KERDI-SHOWER-LT/-LTS shower tray applications.

The KERDI-LINE grate assembly consists of a stainless steel frame that can be seamlessly adjusted to the thickness of the ceramic tile or stone covering – 1/8" to 1" (3 mm to 25 mm) for standard grate assemblies and 1/4" to 23/32" (6 mm to 18 mm) for KERDI-LINE-STYLE grate assemblies – and stainless steel grates that are placed within the frame. The standard grate assembly frame features a 3/8" (10 mm) wide reveal after installation and can be combined with one of two grate options: SOLID (A) or SQUARE (B). Each standard assembly is available in a brushed, chrome, or textured color-coated finish. The SQUARE (B) option is also available with a locking mechanism (brushed stainless steel, 3/4" – 19 mm frame only) for applications where tamper resistance is desired or required (e.g., healthcare and education facilities, etc.). The KERDI-LINE-STYLE grate assembly frame features a minimal reveal after installation and can be combined with one of three grate options: FLORAL (E), CURVE (F), or PURE (G). Each STYLE assembly is available in a brushed finish. The TILE grate (D) consists of a frameless, tileable covering support that is placed flush with the top of the channel body and can therefore accommodate any thickness tile covering. If KERDI-LINE is placed at shower entrance, it is recommended that the SOLID (A), PURE (G), or TILE (D) grate is chosen and that the drainage openings span the maximum width of the entrance to limit potential overflow; secondary drainage (e.g., KERDI-DRAIN-F) may be required in the drying area.

**8.8 Schluter®-KERDI-LINE-VARIO** is a low-profile, variable length linear shower drain specifically designed for bonded waterproofing assemblies. KERDI-LINE-VARIO can be initially cut to size onsite to fit the specific dimensions of the shower. The floor can be sloped on



a single plane to KERDI-LINE-VARIO, which enables the use of large-format tiles and creates interesting design opportunities. KERDI-LINE-VARIO is best suited for placement against the wall but can also be installed in the center of the shower. For drain placement at the entrance of the shower, please refer to the 8.7 KERDI-LINE linear drain.

KERDI-LINE-VARIO consists of a polypropylene flange, a formed stainless steel channel, a stainless steel grate, and stainless steel end caps for applications involving trimmed lengths.

The KERDI-LINE-VARIO flange comprises an injection molded polypropylene drain body featuring a standard 2" (50 mm) NPT outlet, which attaches to a standard, threaded, mechanical coupling to allow for an adhesive chemical bond to the drainpipe. KERDI-LINE-VARIO is supplied with PVC and ABS couplings. The simple connection makes KERDI-LINE-VARIO suitable for new construction and renovations. The perimeter of the polypropylene flange consists of a bonding flange laminated with a collar made of KERDI. This ensures a simple and secure connection to the bonded waterproofing assembly, both in the floor area and on adjacent walls. The KERDI-LINE-VARIO flange kit contains corresponding polystyrene foam supports to set the drain elevation to the corresponding KERDI-SHOWER-LT/-LTS shower trays.

The KERDI-LINE-VARIO channel features a formed stainless steel design 1-11/16" wide by 3/8" high (43 mm wide by 10 mm high) with a drainage opening cut in the center. The channel comes in lengths of 48" and 96" (122 cm and 244 cm) and is designed to be trimmed to length to ensure a proper fit in custom applications. The flange outlet may be positioned anywhere within the overall trimmed length of the channel to avoid obstacles encountered during construction (e.g., floor joists).

The KERDI-LINE-VARIO grate is a formed stainless steel design that nests into the corresponding channel. The overall length of the grate must be trimmed to the same length as the channel. If the grate is trimmed, the supplied end caps should be used to provide a clean finished look. The KERDI-LINE-VARIO grate assembly features a minimal reveal after installation and is available in four designs: SQUARE, FLORAL, HERRINGBONE, and SLANT; in brushed stainless steel or color-coated finishes.

KERDI-LINE-VARIO drains are designed to meet the International Plumbing Code (IPC) guideline for a single standard showerhead with a maximum flow of 2.5 gpm (9.5 L/m).

KERDI-LINE is recommended for showers that exceed the International Plumbing Code (IPC) guideline for a single standard showerhead with a maximum flow rate of 2.5 gpm (9.5 L/m). Perfect for showers that include multiple shower heads, body sprays, hand wands, etc., KERDI-LINE features a wider and deeper design to accommodate higher input water flow.

#### Notes:

- The shortest allowable length to cut the channel and grate is 10" (25.4 cm)
- The minimum recommended tile thickness to use with the KERDI-LINE-VARIO channel is 3/8" (10 mm).

**Schluter®-KERDI-LINE-FC** is a stainless steel cover plate for use with KERDI-LINE to create a seamless look in applications where multiple drains are installed end-to-end. KERDI-LINE-FC is available in a brushed, chrome, or textured color-coated finish and is designed for use with either the SOLID (A) or SQUARE (B) grates.

**14.1 Schluter®-SHOWERPROFILE-S/-R** system profiles represent an elegant solution for finishing the area between the floor and the first course of wall tile in a way that eliminates cutting wedges of tile and ensures a consistent elevation of the first course of wall tile in KERDI-LINE applications. SHOWERPROFILE-S consists of a trapezoid-perforated anchoring leg with a groove, which accepts a tapered brushed stainless steel profile that matches the slope of the KERDI-SHOWER-LTS shower tray. The profile is adjusted to cover the exposed wall area and forms the visible surface. SHOWERPROFILE-R consists of a brushed stainless steel profile and corresponding channel. The profile is adjusted to fit the space between the KERDI-LINE and the wall tile and forms the visible surface in applications where the KERDI-LINE is placed adjacent to a wall.

### Material Properties and Areas of Application

KERDI-DRAIN, KERDI-DRAIN-H, KERDI-LINE and KERDI-LINE-VARIO are suitable for use in residential and commercial applications, including areas subject to foot and wheelchair traffic, such as showers and wet rooms in homes, hotels, schools, healthcare facilities, etc.

Various configurations of KERDI-DRAIN, KERDI-DRAIN-H, KERDI-LINE, and KERDI-LINE-VARIO are listed by UPC®, CSA, and ICC-ES PMG. Relevant industry standard guidelines for shower drains with integrated bonding flange include methods B422, B422C,

SR613 and SR614 in the Tile Council of North America's (TCNA) Handbook for Ceramic Tile Installation and Method 326DR in the Terrazzo, Tile and Marble Association of Canada (TTMAC) Specification Guide 093000 Tile Installation Manual. See the Product Listings and Certifications table on page 22 for specific information.

KERDI-DRAIN flanges are formed using ABS, PVC, or stainless steel 304 (1.4301 = V2A). KERDI-DRAIN-H flanges are formed using ABS or PVC. Plastic drain flanges feature a polypropylene fleece webbing on the surface of the bonding flange to accept a bond to thin-set mortar. The KERDI-DRAIN-A adaptor kits feature steel adaptor rings with thermoplastic rubber gaskets and adaptor flanges made of ABS. Drain grates are available in plain and coated stainless steel 304 (1.4301 = V2A) and anodized aluminum. The covering support is stainless steel 304 (1.4301 = V2A) with KERDI laminated on the surface.

The KERDI-LINE channel body is formed using stainless steel 316 L (1.4404 = V4A) and features a bonding flange with a KERDI collar laminated on the surface. KERDI is a bonded waterproof membrane with a modified polyethylene (PEVA) with non-woven polypropylene fleece on both sides to anchor the membrane in the thin-set mortar. The frame and grates are made of stainless steel 316 L (1.4404 = V4A). The channel support is made of pressure-resistant, expanded polystyrene (EPS). The KERDI-LINE-FC cover plate is roll-formed using stainless steel 316 L (1.4404 = V4A). The SHOWERPROFILE-S anchoring leg is made of recycled, rigid PVC. The SHOWERPROFILE-S/-R profiles are made of stainless steel 316 (1.4404 = V4A) with KERDI laminated on the backside.

The KERDI-LINE-VARIO channel, grates, and grate end caps are formed using stainless steel 316 (1.4404 = V4A).

The KERDI-LINE-VARIO flange comprises an injection molded polypropylene drain body featuring a 2" (50 mm) NPT outlet, which attaches a standard, threaded, mechanical coupling to allow for an adhesive chemical bond to the drain pipe.

The flange features a bonding flange with a KERDI collar laminated on the surface. KERDI is a bonded waterproof membrane with a modified polyethylene (PEVA) with non-woven polypropylene fleece on both sides to anchor the membrane in the thin-set mortar.

The foam support channel is made of pressure-resistant, expanded polystyrene (EPS).





KERDI-LINE-VARIO drains are designed to meet the International Plumbing Code (IPC) guideline for a single standard showerhead with a maximum flow of 2.5 gpm (9.5 L/m).

KERDI-LINE is recommended for showers that exceed the International Plumbing Code (IPC) guideline for a single standard showerhead with a maximum flow rate of 2.5 gpm (9.5 L/m). Perfect for showers that include multiple shower heads, body sprays, hand wands, etc., KERDI-LINE features a wider and deeper design to accommodate higher input water flow.

Schluter®-Systems drain grates are resistant to most chemicals encountered in tiled environments. In special cases, the suitability of a proposed type of material must be verified based on the anticipated chemical, mechanical, and/or other stresses. In general, grates should be protected against abrasion or scratching. Exceptions and special considerations are listed below

**Stainless steel** can sustain high mechanical stresses and is particularly well suited for applications requiring resistance against chemicals and acids. For more severe chemical exposure, such as de-icing salts and chemicals used in swimming pools, we recommend the use of stainless steel 316 L, which offers even higher corrosion resistance than the 304. Even stainless steel cannot withstand all chemical exposures, such as hydrochloric acid, hydrofluoric acid or certain chlorine, chloride and brine concentrations.

**Metallic-coated** grates are stainless steel 304 with a metallic coating created using physical vapor deposition (PVD). The resulting metallic film is very hard and corrosion-resistant.

**Textured color-coated** grates are stainless steel with a powder coat.

**Anodized aluminum** grates feature an anodized layer that retains a uniform appearance during normal use. The surface may be damaged by grout or setting material. Therefore, these materials must be removed immediately.

## Installation

For complete installation guidelines and warranty criteria for shower applications, please contact Schluter®-Systems at 800-472-4588 (USA) or 800-667-8746 (Canada) to receive a copy of the Schluter®-Shower System Installation Handbook and a step-by-step installation video. To download a PDF version of the Handbook or to view the installation video online, please visit [schluter.com](http://schluter.com).

## Maintenance

KERDI-DRAIN, KERDI-DRAIN-H, KERDI-LINE, KERDI-LINE-VARIO, and SHOWERPROFILE-S/-R require no special maintenance and are resistant to mold and fungi. The grate may be removed to clean the drain housing and the drain pipes.

Clean the grates and profiles using pH neutral cleaners. Avoid the use of strong acids (e.g., hydrochloric, hydrofluoric) and bases/alkaline cleaners (e.g., bleach, ammonia, chlorides). Do not use abrasive cleaning agents and tools. Even stainless steel requires periodic cleaning, which will maintain a neat appearance and reduce the risk of corrosion. Stainless steel surfaces develop a sheen when treated with a chrome-polishing agent.

## Product Item Numbers

## 8.2 Schluter®-KERDI-DRAIN



## 4" Grate Options

Tileable Covering Support

Anodized Aluminum



**TILE (ECS)**  
Patent pending



**CONTOUR**

Available in the following colors and finishes:

Brushed  
Nickel  
(ATGB)

Brushed  
Copper  
(AKGB)

Brushed  
Brass  
(AMGB)

Stainless Steel



**CLASSIC**

Available in the following colors and finishes:

Stainless  
Steel  
(E)

Nickel  
(ET)

Chrome  
(EP)

Vintage Gold  
(EVG)

Oil-rubbed  
Bronze  
(EOB)

Classic Gold  
(ECG)



**PURE**



**CURVE**



**FLORAL**

Available in the following colors and finishes:

Brushed  
Stainless Steel  
(EB)

Brushed  
Nickel  
(EBT)

Brushed  
Vintage Gold  
(EBVG)

Brushed  
Classic Gold  
(EBCG)

Matte White  
(MBW)

Ivory  
(TSI)

Greige  
(TSBG)

Cream  
(TSC)

Bronze  
(TSOB)

Stone Grey  
(TSSG)

Pewter  
(TSG)

Dark  
Anthracite  
(TSDA)

Matte Black  
(MGS)

## 6" Grate Options

Stainless Steel

Stainless Steel Cover for Cleanout Applications



**CLASSIC  
(6E)**



**CLASSIC  
ROUND  
(6E)**



**(6CE)**

## Flange Options

ABS - 2" or 3" Outlet

PVC - 2" or 3" Outlet





Stainless Steel - 2" or 3"  
No-hub OutletStainless Steel - 2"  
Threaded Outlet

**Note:** Product listings and certifications can be referenced on page 23.




Schluter®-KERDI-DRAIN

**ABS or PVC FLANGE — 2" or 3" OUTLET**

2" (50 mm) drain outlet		3" (75 mm) drain outlet	
Material	Item No.	Material	Item No.
 ABS	KD2 FLK ABS	 ABS	KD3 FLK ABS
 PVC	KD2 FLK PVC	 PVC	KD3 FLK PVC

Additional components included					
	<b>4x</b> Inside corners		<b>2x</b> Outside corners		<b>1x</b> Pipe seal (3/4" - 20 mm)
					<b>1x</b> Mixing valve seal (4-1/2" - 114 mm)

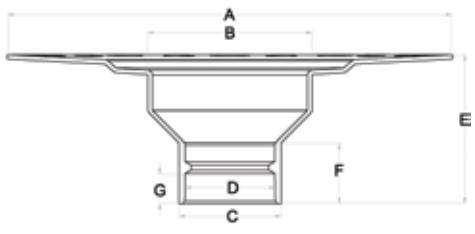Flange measurements			
ABS or PVC			
		2" (50 mm) drain outlet	3" (75 mm) drain outlet
	A	11-13/16" - 300 mm	11-13/16" - 300 mm
	B	4-17/32" - 115.2 mm	4-17/32" - 115.2 mm
	C	2-45/64" - 68.6 mm	3-15/16" - 100 mm
	D	2-3/8" - 60.5 mm	3-1/2" - 88.8 mm
	E	3-15/16" - 100 mm	3-15/16" - 100 mm
	F	1-39/64" - 40.6 mm	2" - 50.8 mm
	G	7/8" - 22.5 mm	1-1/2" - 38.1 mm






When using a flange with 3" outlet, a 6" grate is recommended.




Schluter®-KERDI-DRAIN

STAINLESS STEEL FLANGE — 2" or 3" OUTLET

2" (50 mm) drain outlet	
Material	Item No.
 No-hub	KD2 FLK E
 Threaded	KD2 FLK ETH


3" (75 mm) drain outlet	
Material	Item No.
 No-hub	KD3 FLK E

Additional components included



Flange measurements

Stainless steel

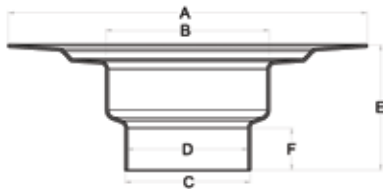


	2" (50 mm) no-hub outlet	3" (75 mm) no-hub outlet
A	9-27/32" - 250 mm	9-27/32" - 250 mm
B	4-1/2" - 115.4 mm	4-1/2" - 114 mm
C	2-13/32" - 61.3 mm	3-7/16" - 87.4 mm
D	2-13/32" - 60.6 mm	3-5/16" - 84.2 mm
E	3-11/32" - 85 mm	3-7/16" - 87.4 mm
F	53/64" - 21 mm	1-5/32" - 29.4 mm



When using a flange with 3" outlet, a 6" grate is recommended.


**Schluter®-KERDI-DRAIN-H****ABS or PVC FLANGE — 2" OUTLET HORIZONTAL****2" (50 mm) drain outlet**

Material	Item No.
 ABS	KDH2 FLK ABS
 PVC	KDH2 FLK PVC

**Additional components included**


 <b>4x</b> Inside corners	 <b>2x</b> Outside corners	 <b>1x</b> Pipe seal (3/4" - 20 mm)	 <b>1x</b> Mixing valve seal (4-1/2" - 114 mm)
---	---	---	--

**Flange measurements****ABS or PVC**

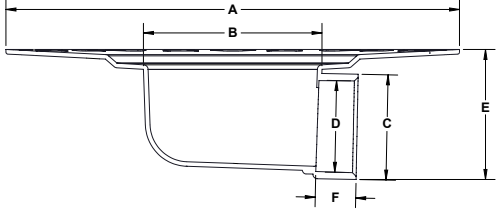	2" (50 mm) horizontal drain outlet	
	A	11-13/16" - 300 mm
	B	4-21/32" - 118.3 mm
	C	2-47/64" - 69.5 mm
	D	2-3/8" - 60.5 mm
	E	3-3/8" - 85.7 mm
	F	1-1/16" - 27 mm

**Schluter®-KERDI-SHOWER-CB**

**Schluter®-KERDI-SHOWER-CB** is a height compensation board made of lightweight expanded polystyrene used to accommodate the drain body and waste pipe height, when installing the Schluter®-KERDI-DRAIN-H in conjunction with the Schluter®-KERDI-SHOWER -T/TS/TT shower trays. The compensation board can easily be cut to size to fit around the drain and waste pipe, and multiple boards can be used to fit the size and shape of the shower.

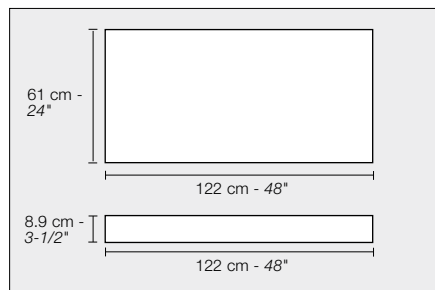**Schluter®-KERDI-SHOWER-CB****Compensation board**


Item No.	Dimensions
KSCB 90 610 1220	122 cm x 61 cm x 8.9 cm (48" x 24" x 3-1/2")




## Schluter®-KERDI-DRAIN-A


## ADAPTOR KIT — 5-1/2" or 7-1/2" ADAPTOR RING


**Schluter®-KERDI-DRAIN-A ADAPTOR KITS** are used to convert traditional clamping ring drains to integrated bonding flange drains when removal of the clamping ring drain is not practical. A steel adaptor ring with an overmolded rubber gasket replaces the clamping ring and is sealed to the existing drain body using Schluter®-KERDI-FIX. The bonding flange then slides into the adaptor ring and seals against the rubber gasket. Adaptor kits are suitable for both mortar bed and Schluter®-KERDI-SHOWER-T/-TS/-TT shower tray applications.


5-1/2" (139.7 mm) adaptor ring	
Flange and ring	Item No.
 <p>5-1/2"</p> <p><b>Also included:</b> Height adjustment collar for KERDI-DRAIN grate</p>	KDAM5 FLK ABS

7-1/2" (191 mm) adaptor ring	
Flange and ring	Item No.
 <p>7-1/2"</p> <p><b>Also included:</b> Lateral adjustment ring for KERDI-DRAIN grate</p>	KDA7 FLK ABS

## Additional components included

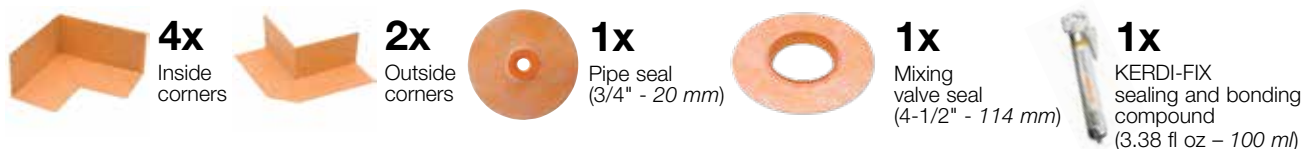

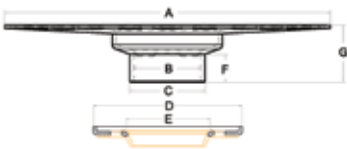Flange and adaptor ring measurements		
ABS		
	5-1/2"	
	A	11-13/16" - 300 mm
	B	2-5/16" - 58.7 mm
	C	2-17/32" - 64.1 mm
	D	5-1/2" - 139.7 mm
	E	2-11/16" - 68.2 mm
	F	1" - 25.2 mm
	G	2-9/32" - 57.8 mm

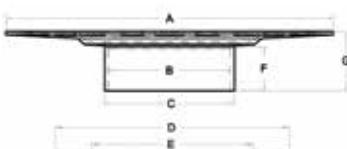
Flange and adaptor ring measurements		
ABS		
	7-1/2"	
	A	11-13/16" - 300 mm
	B	4-13/32" - 111.8 mm
	C	4-11/16" - 118.9 mm
	D	7-1/2" - 191 mm
	E	5-7/64" - 130 mm
	F	3-1/16" - 77.8 mm
	G	3-41/64" - 92.4 mm

i

The 6" round/square grates are **NOT** compatible with the 5-1/2" ring flange.

**Schluter®-KERDI-SHOWER-CB**

**Schluter®-KERDI-SHOWER-CB** is a height compensation board made of lightweight expanded polystyrene used to accommodate the adaptor ring height when installing the Schluter®-KERDI-DRAIN-A in conjunction with the Schluter®-KERDI-SHOWER-T/-TS/-TT shower trays. The compensation board can easily be cut to size to fit around the adaptor ring and multiple boards can be used to fit the size and shape of the shower.

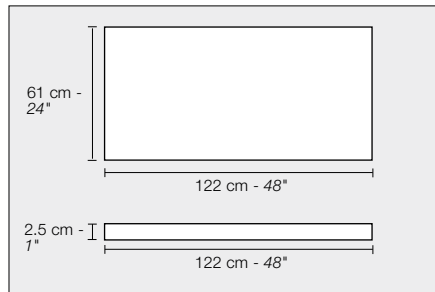

Schluter®-KERDI-SHOWER-CB	
Compensation board	
Item No.	Dimensions
KSCB 25 610 1220	122 cm x 61 cm x 2.5 cm (48" x 24" x 1")



## Schluter®-KERDI-DRAIN-STYLE

## GRATES FOR USE WITH FLANGES WITH 2" OUTLET

## 4" (100 mm) Grate

## Stainless Steel

## PURE

Grate finish	Item No.
Brushed stainless steel (EB)	KDIF4 GRK EB D8
Brushed nickel (EBT)	KDIF4 GRK EBT D8
Brushed vintage gold (EBVG)	KDIF4 GRK EBVG D8
Brushed classic gold (EBCG)	KDIF4 GRK EBCG D8



EB



EBT



EBVG



EBCG

## CURVE

Grate finish	Item No.
Brushed stainless steel (EB)	KDIF4 GRK EB D6
Brushed nickel (EBT)	KDIF4 GRK EBT D6
Brushed vintage gold (EBVG)	KDIF4 GRK EBVG D6
Brushed classic gold (EBCG)	KDIF4 GRK EBCG D6



EB



EBT



EBVG



EBCG

## FLORAL

Grate finish	Item No.
Brushed stainless steel (EB)	KDIF4 GRK EB D5
Brushed nickel (EBT)	KDIF4 GRK EBT D5
Brushed vintage gold (EBVG)	KDIF4 GRK EBVG D5
Brushed classic gold (EBCG)	KDIF4 GRK EBCG D5



EB



EBT



EBVG



EBCG

## Contents

**1x**

Grate and frame

**1x**

Height adjustment collar

**1x**

Lateral adjustment ring




## Schluter®-KERDI-DRAIN-STYLE

## GRATES FOR USE WITH FLANGES WITH 2" OUTLET

## 4" (100 mm) Grate

## TRENDLINE


PURE	
Grate finish	Item No.
Matte white (MBW)	KDIF4 GRK MBW D8
Ivory (TSI)	KDIF4 GRK TSI D8
Greige (TSBG)	KDIF4 GRK TSBG D8
Cream (TSC)	KDIF4 GRK TSC D8
Bronze (TSOB)	KDIF4 GRK TSOB D8
Stone grey (TSSG)	KDIF4 GRK TSSG D8
Pewter (TSG)	KDIF4 GRK TSG D8
Dark anthracite (TSDA)	KDIF4 GRK TSDA D8
Matte black (MGS)	KDIF4 GRK MGS D8

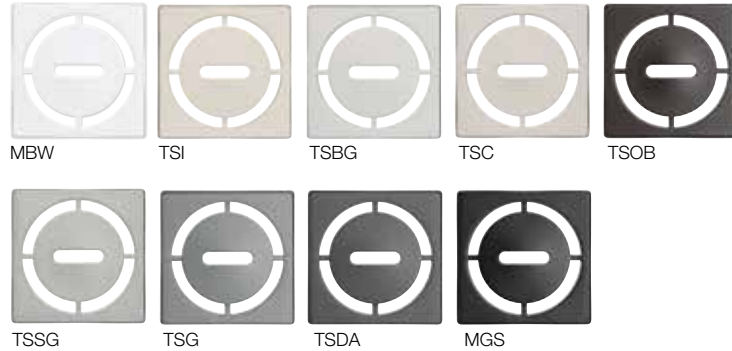

CURVE	
Grate finish	Item No.
Matte white (MBW)	KDIF4 GRK MBW D6
Ivory (TSI)	KDIF4 GRK TSI D6
Greige (TSBG)	KDIF4 GRK TSBG D6
Cream (TSC)	KDIF4 GRK TSC D6
Bronze (TSOB)	KDIF4 GRK TSOB D6
Stone grey (TSSG)	KDIF4 GRK TSSG D6
Pewter (TSG)	KDIF4 GRK TSG D6
Dark anthracite (TSDA)	KDIF4 GRK TSDA D6
Matte black (MGS)	KDIF4 GRK MGS D6



FLORAL	
Grate finish	Item No.
Matte white (MBW)	KDIF4 GRK MBW D5
Ivory (TSI)	KDIF4 GRK TSI D5
Greige (TSBG)	KDIF4 GRK TSBG D5
Cream (TSC)	KDIF4 GRK TSC D5
Bronze (TSOB)	KDIF4 GRK TSOB D5
Stone grey (TSSG)	KDIF4 GRK TSSG D5
Pewter (TSG)	KDIF4 GRK TSG D5
Dark anthracite (TSDA)	KDIF4 GRK TSDA D5
Matte black (MGS)	KDIF4 GRK MGS D5

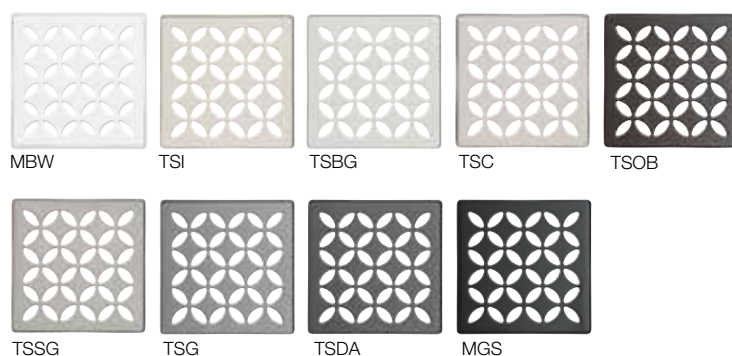

## Contents



**1x**  
Grate and frame



**1x**  
Height adjustment collar



**1x**  
Lateral adjustment ring



## Schluter®-KERDI-DRAIN

## GRATES FOR USE WITH FLANGES WITH 2" OUTLET

## 4" (100 mm) Grate

## Stainless steel - CLASSIC

CLASSIC	
Grate finish	Item No.
Stainless steel (E)	KD4 GRK E
Chrome (EP)	KD4 GRK EP
Oil-rubbed bronze (EOB)	KD4 GRK EOB
Nickel (ET)	KD4 GRK ET
Vintage gold (EVG)	KD4 GRK EVG
Classic gold (ECG)	KD4 GRK ECG



## Anodized aluminum - CONTOUR

CONTOUR	
Grate finish	Item No.
Brushed nickel (ATGB)	KD4 GRK ATGB
Brushed copper (AKGB)	KD4 GRK AKGB
Brushed brass (AMGB)	KD4 GRK AMGB



## Contents



**1x**  
Grate and frame



**1x**  
Height adjustment  
collar



**1x**  
Lateral adjustment  
ring



**Schluter®-KERDI-DRAIN****GRATES FOR USE WITH FLANGES WITH 2" OUTLET****4" (100 mm) Grate****TILE**


TILE	
Grate finish	Item No.
TILE	KD4 GRK ECS



The tileable grate is not suitable for use with the KERDI-DRAIN-F flange.

**Contents**

**1x**  
Tileable  
covering  
support



**1x**  
Spacer



**1x**  
Lateral  
adjustment  
ring

**GRATES FOR USE WITH FLANGES WITH 2" or 3" OUTLET****6" (150 mm) Grate****Stainless steel - CLASSIC**

CLASSIC SQUARE	
Grate finish	Item No.
Stainless steel (E)	KD6 GRK E



CLASSIC ROUND	
Grate finish	Item No.
Stainless steel (E)	KD6 GRK RE

**Contents**

**1x**  
Grate and frame  
with integrated height  
adjustment collar



**1x**  
Lateral  
adjustment ring



The 6" (150 mm) grates are not suitable for use with the KERDI-DRAIN-F flange and the KERDI-DRAIN-A flange with 5-1/2" (139.7 mm) adaptor ring.

**Schluter®-KERDI-DRAIN****DRAIN KITS — ABS or PVC FLANGE - 2" OUTLET - STAINLESS STEEL GRATE**

Schluter®-KERDI-DRAIN		
	ABS - 2" (50 mm)	PVC - 2" (50 mm)
4" (100 mm) square grate		
Stainless steel	KD2/ABS/E	KD2/PVC/E

**Contents****1x**  
Flange**1x**  
Grate and  
frame**1x**  
Height adjustment  
collar**1x**  
Lateral  
adjustment  
ring**4x**  
Inside  
corners**2x**  
Outside  
corners**1x**  
Pipe seal  
(3/4" - 20 mm)**1x**  
Mixing valve seal  
(4-1/2" - 114 mm)**ADAPTOR KIT — 5-1/2" ADAPTOR RING - 4" STAINLESS STEEL GRATE**



5-1/2" (139.7 mm) adaptor ring	
	ABS
4" (100 mm) square grate	
Stainless steel	KDAM5ABSE



**Contents****1x**  
Flange**1x**  
Grate and  
frame**1x**  
Height  
adjustment  
collar**1x**  
Adaptor  
ring**4x**  
Inside  
corners**2x**  
Outside  
corners**1x**  
Pipe seal  
(3/4" - 20 mm)**1x**  
Mixing  
valve seal  
(4-1/2" - 114 mm)**1x**  
KERDI-FIX  
sealing and bonding compound  
(3.38 fl oz - 100 ml)





## Schluter®-KERDI-DRAIN

## ABS or PVC FLANGE — 2" or 3" OUTLET - WITHOUT SEALS AND CORNERS



2" (50 mm) drain outlet	
Material	Item No.
 ABS	KD2/ABS/FL
 PVC	KD2/PVC/FL

3" (75 mm) drain outlet	
Material	Item No.
 ABS	KD3/ABS/FL
 PVC	KD3/PVC/FL

ABS or PVC **HORIZONTAL** FLANGE — 2" OUTLET - WITHOUT SEALS AND CORNERS

2" (50 mm) drain outlet	
Material	Item No.
 ABS	KDH2/ABS/FL
 PVC	KDH2/PVC/FL

## STAINLESS STEEL FLANGE — 2" or 3" OUTLET - WITHOUT SEALS AND CORNERS

2" (50 mm) drain outlet	
Material	Item No.
 No-hub	KD2/E/FL
 Threaded	KD2/ETH/FL

3" (75 mm) drain outlet	
Material	Item No.
 No-hub	KD3/E/FL

## Also included with stainless steel flanges



**1x**KERDI-FIX  
sealing and bonding compound  
(3.38 fl oz – 100 ml)**i**

When using a flange with 3" outlet, a 6" grate is recommended.




## Schluter®-KERDI-DRAIN

## 10 PACKS — ABS OR PVC FLANGE - 2" OUTLET


2" (50 mm) drain outlet	
Material	Item No.
 ABS	KD2 FLK ABS 10
 PVC	KD2 FLK PVC 10

**Note:** 10 packs are packaged in bulk, not individually boxed.

## Additional components included

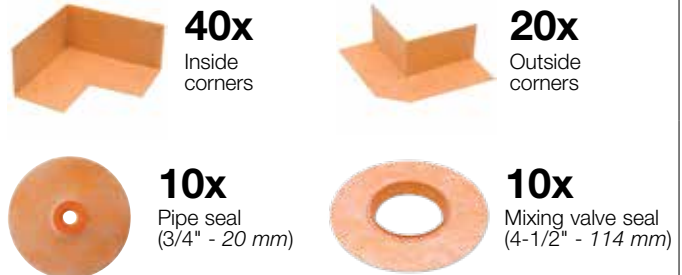

## 10 PACKS — ABS FLANGE - 5-1/2" ADAPTOR RING


5-1/2" (139.7 mm) adaptor ring	
Flange and ring	Item No.
 5-1/2" <b>Also included:</b> Height adjustment collar for KERDI-DRAIN grate	KDAM5 FLK ABS 10

**Note:** 10 packs are packaged in bulk, not individually boxed.

i

The 6" round/square grates are **NOT** compatible with the 5-1/2" ring flange.

## Additional components included

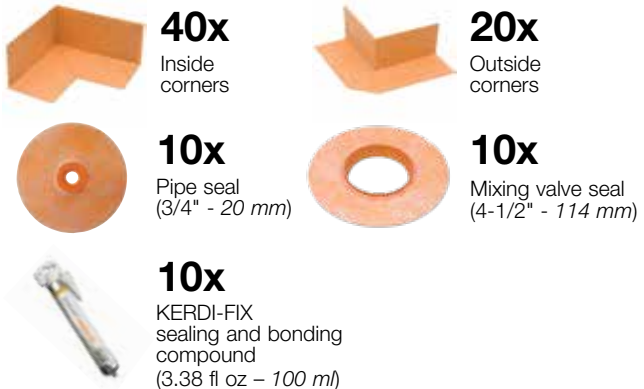

## 10 PACKS — 4" GRATE - STAINLESS STEEL

## Stainless steel - CLASSIC



Stainless steel
Item No.
KD4 GRK E 10

**Note:** 10 packs are packaged in bulk, not individually boxed.

## Contents



**Schluter®-KERDI-DRAIN****6" SQUARE CLEAN OUT COVER**

The **Schluter®-KERDI-DRAIN Clean Out Cover** is a 6" stainless steel cover available for installations where the KERDI-DRAIN bonding flange is to be used in a cleanout application.



Clean out cover 6"	
Item No.	Finish
KD-GR6C-E	Stainless steel

**TAMPER PROOF SCREWS**

**Schluter®-KERDI-DRAIN Tamper Proof Screws** are designed as a high security accessory for the KERDI-DRAIN. Ideal for loss prevention and anti-theft, these tamper proof screws are used in environments where tamper resistance is desired or required (e.g., healthcare or education facilities, etc.). Phillips head screws are included with the KERDI-DRAIN. The tamper-proof screws as well as the driver bit must be purchased separately.



Tamper proof screw and driver bit	
Item No.	Description
KD/TPSCRW	Tamper proof screw
KD/TPWRCH	Driver bit

**STRAINER**


The **Schluter®-KERDI-DRAIN Strainer** is a hair catcher customized to fit inside the KERDI-DRAIN flange to trap and collect hair. Simple to remove and clean, the hair catcher fits discreetly into the drain to prevent hair clogs that can lead to blocked pipes.

**Note:** The KERDI-DRAIN strainer is only suitable for use with flanges with 2" (50 mm) vertical outlets (ABS, PVC, and stainless steel with no-hub or threaded outlet).



Strainer for KERDI-DRAIN	
Item No.	Description
KD-STR	Strainer





**Note:** There are multiple selections to be made for this product. Begin by selecting the appropriate channel body length then proceed to grate selection accordingly, keeping in mind there two frame height options for the SOLID (A) and SQUARE (B) grates.

## Schluter®-KERDI-LINE

### CHANNEL BODY

#### Contents



**1x**  
Channel body

**1x**  
Channel support

**1x**  
No-hub coupling



**4x**  
Inside corners



**1x**  
Pipe seal  
(3/4" - 20 mm)




**2x**  
Outside corners



**1x**  
Mixing valve seal  
(4-1/2" - 114 mm)

Channel body center outlet




#### Schluter®-KERDI-LINE

##### Channel body - stainless steel - center outlet

L = in. - cm	L <sub>1</sub> = in. - cm	Item No.
19-11/16 - 50	21-11/16 - 55	KL1V 60 E 50
23-5/8 - 60	25-5/8 - 65	KL1V 60 E 60
27-9/16 - 70	29-9/16 - 75	KL1V 60 E 70
31-1/2 - 80	33-1/2 - 85	KL1V 60 E 80
35-7/16 - 90	37-7/16 - 95	KL1V 60 E 90
39-3/8 - 100	41-3/8 - 105	KL1V 60 E 100
43-5/16 - 110	45-5/16 - 115	KL1V 60 E 110
47-1/4 - 120	49-1/4 - 125	KL1V 60 E 120
51-3/16 - 130	53-3/16 - 135	KL1V 60 E 130
55-1/8 - 140	57-1/8 - 145	KL1V 60 E 140
59-1/16 - 150	61-1/16 - 155	KL1V 60 E 150
62-15/16 - 160	64-15/16 - 165	KL1V 60 E 160
66-7/8 - 170	68-7/8 - 175	KL1V 60 E 170
70-13/16 - 180	72-13/16 - 185	KL1V 60 E 180

Channel body off-set outlet




##### Channel body - stainless steel - off-set outlet

L = in. - cm	L <sub>1</sub> = in. - cm	Item No.
27-9/16 - 70	29-9/16 - 75	KL1VO 60 E 70
31-1/2 - 80	33-1/2 - 85	KL1VO 60 E 80
35-7/16 - 90	37-7/16 - 95	KL1VO 60 E 90
39-3/8 - 100	41-3/8 - 105	KL1VO 60 E 100
43-5/16 - 110	45-5/16 - 115	KL1VO 60 E 110
47-1/4 - 120	49-1/4 - 125	KL1VO 60 E 120

**LINEAR DRAIN ADAPTOR KIT — 5-1/2" (139.7 mm)****Schluter®-KERDI-LINE-A**

**Schluter®-KERDI-LINE-A** adaptor kits are designed to convert clamping ring drains to KERDI-LINE linear drains when removal of the clamping ring drain is not practical (e.g., when they are set in concrete slabs). The adaptor kit includes a steel adaptor ring, available in 5-1/2" (139.7 mm) diameter, with an over-molded rubber gasket and a variety of perforated hole patterns that align with most common clamping ring drains.



Linear drain adaptor kit (139.7 mm - 5-1/2")	
1 UNIT	10-PACK*
Item No.	Item No.
KLAM 5K	KLAM 5K 10

**\*Note:**


10-packs are packaged in bulk, not individually boxed.

**Additional component included****1x**KERDI-FIX  
sealing and bonding compound  
(100 ml - 3.38 fl oz)**Adaptor ring measurements**

	A	139.7 mm - 5-1/2"
	B	64.6 mm - 2-9/16"

**Schluter®-KERDI-SHOWER-CB**

**Schluter®-KERDI-SHOWER-CB** is a height compensation board made of lightweight expanded polystyrene used to accommodate the adaptor ring height when installing the Schluter®-KERDI-LINE-A in conjunction with the Schluter®-KERDI-SHOWER-LT/-LTS shower trays. The compensation board can easily be cut to size to fit around the adaptor ring and multiple boards can be used to fit the size and shape of the shower.

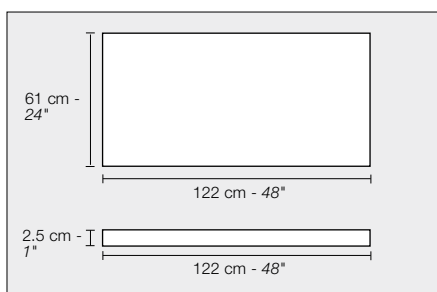**Schluter®-KERDI-SHOWER-CB****Compensation board**


Item No.	Dimensions
KSCB 25 610 1220	122 cm x 61 cm x 2.5 cm (48" x 24" x 1")



Schluter®-KERDI-LINE

## GRATE ASSEMBLY - BRUSHED STAINLESS STEEL


### CONTENTS

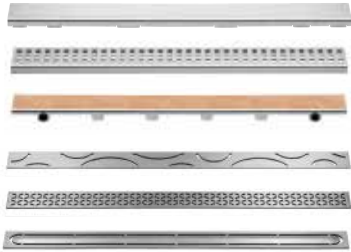

**1x**

Grate  
6 design options:

- SOLID
- SQUARE
- TILE
- CURVE
- FLORAL
- PURE




**1x**


Grate frame with height adjustment spacers.  
See product tables for frame height options (not included with TILE grate).



**SOLID (A)**



**SQUARE (B)**



### Grate assemblies - Brushed stainless steel



3/4" (19 mm) frame height for  
1/8" to 9/16" (3 mm to 15 mm) -thick coverings

Length = in. - cm	SOLID (A)	SQUARE (B)
	Item No.	Item No.
19-11/16 - 50	KL1AR 19 EB 50	KL1B 19 EB 50
23-5/8 - 60	KL1AR 19 EB 60	KL1B 19 EB 60
27-9/16 - 70	KL1AR 19 EB 70	KL1B 19 EB 70
31-1/2 - 80	KL1AR 19 EB 80	KL1B 19 EB 80
35-7/16 - 90	KL1AR 19 EB 90	KL1B 19 EB 90
39-3/8 - 100	KL1AR 19 EB 100	KL1B 19 EB 100
43-5/16 - 110	KL1AR 19 EB 110	KL1B 19 EB 110
47-1/4 - 120	KL1AR 19 EB 120	KL1B 19 EB 120
51-3/16 - 130	KL1AR 19 EB 130	KL1B 19 EB 130
55-1/8 - 140	KL1AR 19 EB 140	KL1B 19 EB 140
59-1/16 - 150	KL1AR 19 EB 150	KL1B 19 EB 150
62-15/16 - 160	KL1AR 19 EB 160	KL1B 19 EB 160
66-7/8 - 170	KL1AR 19 EB 170	KL1B 19 EB 170
70-13/16 - 180	KL1AR 19 EB 180	KL1B 19 EB 180





1-1/8" (30 mm) frame height for  
1/2" to 1" (13 mm to 25 mm) -thick coverings

Length = in. - cm	SOLID (A)	SQUARE (B)
	Item No.	Item No.
19-11/16 - 50	KL1AR 30 EB 50	KL1B 30 EB 50
23-5/8 - 60	KL1AR 30 EB 60	KL1B 30 EB 60
27-9/16 - 70	KL1AR 30 EB 70	KL1B 30 EB 70
31-1/2 - 80	KL1AR 30 EB 80	KL1B 30 EB 80
35-7/16 - 90	KL1AR 30 EB 90	KL1B 30 EB 90
39-3/8 - 100	KL1AR 30 EB 100	KL1B 30 EB 100
43-5/16 - 110	KL1AR 30 EB 110	KL1B 30 EB 110
47-1/4 - 120	KL1AR 30 EB 120	KL1B 30 EB 120




## Schluter®-KERDI-LINE

## GRATE ASSEMBLY - CHROME

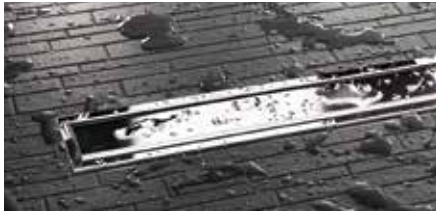


SOLID (A)




SQUARE (B)



## Grate assemblies - Chrome

 3/4" (19 mm) frame height for 1/8" to 9/16" (3 mm to 15 mm) -thick coverings			
Length = in. - cm	SOLID (A)		SQUARE (B)
	Item No.		Item No.
19-11/16 - 50	KL1AR 19 EP 50		KL1B 19 EP 50
23-5/8 - 60	KL1AR 19 EP 60		KL1B 19 EP 60
27-9/16 - 70	KL1AR 19 EP 70		KL1B 19 EP 70
31-1/2 - 80	KL1AR 19 EP 80		KL1B 19 EP 80
35-7/16 - 90	KL1AR 19 EP 90		KL1B 19 EP 90
39-3/8 - 100	KL1AR 19 EP 100		KL1B 19 EP 100
43-5/16 - 110	KL1AR 19 EP 110		KL1B 19 EP 110
47-1/4 - 120	KL1AR 19 EP 120		KL1B 19 EP 120

## GRATE ASSEMBLY - TRENDLINE COLORS




SOLID (A)

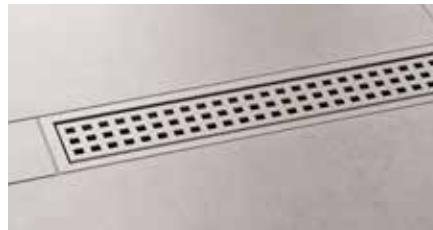

SQUARE (B)

## Grate assemblies - Textured color-coated stainless steel

 19 mm - 3/4" frame height for 3 mm to 15 mm - 1/8" to 9/16" -thick coverings			
Length = cm - in.	SOLID (A)		SQUARE (B)
	Item No.		Item No.
50 - 19-11/16	KL1AR 19 + color* 50		KL1B 19 + color* 50
60 - 23-5/8	KL1AR 19 + color* 60		KL1B 19 + color* 60
70 - 27-9/16	KL1AR 19 + color* 70		KL1B 19 + color* 70
80 - 31-1/2	KL1AR 19 + color* 80		KL1B 19 + color* 80
90 - 35-7/16	KL1AR 19 + color* 90		KL1B 19 + color* 90
100 - 39-3/8	KL1AR 19 + color* 100		KL1B 19 + color* 100
110 - 43-5/16	KL1AR 19 + color* 110		KL1B 19 + color* 110
120 - 47-1/4	KL1AR 19 + color* 120		KL1B 19 + color* 120
130 - 51-3/16	KL1AR 19 + color* 130		KL1B 19 + color* 130
140 - 55-1/8	KL1AR 19 + color* 140		KL1B 19 + color* 140
150 - 59-1/16	KL1AR 19 + color* 150		KL1B 19 + color* 150
160 - 62-15/16	KL1AR 19 + color* 160		KL1B 19 + color* 160
170 - 66-7/8	KL1AR 19 + color* 170		KL1B 19 + color* 170
180 - 70-13/16	KL1AR 19 + color* 180		KL1B 19 + color* 180

## \*Color Codes



\* To complete the item number, add the color code (e.g., KL1B 19 **TSI** 50).








TILE (D)


2" - 50 mm



Grate assemblies - Frameless tileable			
Length = in. - <i>cm</i>	Item No.		
	TILE (D)		
	For use with center outlet channel body	For use with off-set outlet channel body	
19-11/16 - 50	KL1DRE 50	-	
23-5/8 - 60	KL1DRE 60	-	
27-9/16 - 70	KL1DRE 70	KL1DRO E 70	
31-1/2 - 80	KL1DRE 80	KL1DRO E 80	
35-7/16 - 90	KL1DRE 90	KL1DRO E 90	
39-3/8 - 100	KL1DRE 100	KL1DRO E 100	
43-5/16 - 110	KL1DRE 110	KL1DRO E 110	
47-1/4 - 120	KL1DRE 120	KL1DRO E 120	
51-3/16 - 130	KL1DRE 130	-	
55-1/8 - 140	KL1DRE 140	-	
59-1/16 - 150	KL1DRE 150	-	
62-15/16 - 160	KL1DRE 160	-	
66-7/8 - 170	KL1DRE 170	-	
70-13/16 - 180	KL1DRE 180	-	

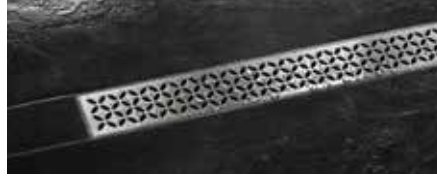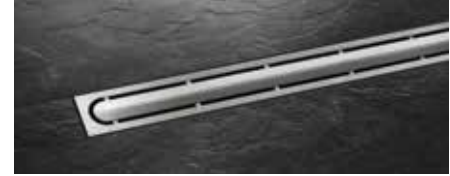

**Schluter®-KERDI-LINE-STYLE****GRATE ASSEMBLY - BRUSHED STAINLESS STEEL STYLE DESIGNS****CURVE****FLORAL****PURE****Grate assemblies - Brushed stainless steel**

 29/32" - 23 mm frame height for 1/4" - 11/16" (6 - 18 mm) -thick coverings			
Length = in. - cm	CURVE	FLORAL	PURE
	Item No.	Item No.	Item No.
19-11/16 - 50	KL1IFF 23 EB 50	KL1IFE 23 EB 50	KL1IFG 23 EB 50
23-5/8 - 60	KL1IFF 23 EB 60	KL1IFE 23 EB 60	KL1IFG 23 EB 60
27-9/16 - 70	KL1IFF 23 EB 70	KL1IFE 23 EB 70	KL1IFG 23 EB 70
31-1/2 - 80	KL1IFF 23 EB 80	KL1IFE 23 EB 80	KL1IFG 23 EB 80
35-7/16 - 90	KL1IFF 23 EB 90	KL1IFE 23 EB 90	KL1IFG 23 EB 90
39-3/8 - 100	KL1IFF 23 EB 100	KL1IFE 23 EB 100	KL1IFG 23 EB 100
43-5/16 - 110	KL1IFF 23 EB 110	KL1IFE 23 EB 110	KL1IFG 23 EB 110
47-1/4 - 120	KL1IFF 23 EB 120	KL1IFE 23 EB 120	KL1IFG 23 EB 120

**Schluter®-KERDI-LINE****PERFORATED GRATE WITH LOCKING MECHANISM**

The **Schluter®-KERDI-LINE** SQUARE grate assembly (B) with 3/4" (19 mm) frame height is available with a locking mechanism for applications where tamper resistance is required.

**SQUARE grate assembly with locking mechanism**



Length = in. - cm	Item No.
19-11/16 - 50	KL1BL 19 EB 50
23-5/8 - 60	KL1BL 19 EB 60
27-9/16 - 70	KL1BL 19 EB 70
31-1/2 - 80	KL1BL 19 EB 80
35-7/16 - 90	KL1BL 19 EB 90
39-3/8 - 100	KL1BL 19 EB 100
43-5/16 - 110	KL1BL 19 EB 110
47-1/4 - 120	KL1BL 19 EB 120
51-3/16 - 130	KL1BL 19 EB 130
55-1/8 - 140	KL1BL 19 EB 140
59-1/16 - 150	KL1BL 19 EB 150
62-15/16 - 160	KL1BL 19 EB 160
66-7/8 - 170	KL1BL 19 EB 170
70-13/16 - 180	KL1BL 19 EB 180

**Note:** Driver bit for tamper-proof screws sold separately. Please see page 16.

## COVER PLATE

**Schluter®-KERDI-LINE-FC**

**Schluter®-KERDI-LINE-FC** is a stainless steel cover plate for use with the Schluter®-KERDI-LINE linear shower drain to create a seamless look in applications where multiple drains are installed end to end. KERDI-LINE-FC is designed for use with either the SOLID or SQUARE grates.

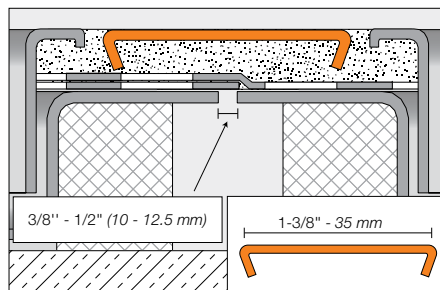**Schluter®-KERDI-LINE-FC Cover Plate**

Brushed stainless steel	Chrome	Textured color-coated
Item No.	Item No.	Item No.
V / KLEB 35	V / KLEP 35	V / KL + color* 35

**\*Color Codes**

TSI Ivory	TSBG Greige	TSSG Stone grey	TSC Cream	TSOB Bronze
TSG Pewter	TSDA Dark anthracite	MBW Matte white	MGS Matte black	

\* To complete the item number, add the color code (e.g., V / KL TSI 35).

## STRAINER

The **Schluter®-KERDI-LINE Strainer** is a hair catcher customized to fit inside the KERDI-LINE channel body to trap and collect hair. Simple to remove and clean, the hair catcher fits discreetly into the drain to prevent hair clogs that can lead to blocked pipes.

**Note:** The tabs of the drain strainer must be installed into the KERDI-LINE channel body v-grooves to ensure proper drainage.

**Strainer for KERDI-LINE**

Item No.	Description
KL VZ SF	Strainer



## Schluter®-KERDI-LINE-VARIO



### FLANGE KIT

#### Contents



**1x**  
Flange



**1x**  
Downspout



**1x**  
Flange support



**1x** ABS coupling  
**1x** PVC coupling



**4x**  
Inside  
corners



**1x**  
Pipe seal  
(20 mm - 3/4")



**1x**  
Cleaning brush



**2x**  
Outside  
corners



**1x**  
Mixing valve seal  
(114 mm - 4-1/2")



**1x**  
Grate removal  
tool



**1x**  
Construction cover



Flange kit
Item No.
KL VR 2 FLK


**Note:** Select the grate and channel assembly on the next page.



Schluter®-KERDI-LINE-VARIO

## GRATE AND CHANNEL KIT

### Contents

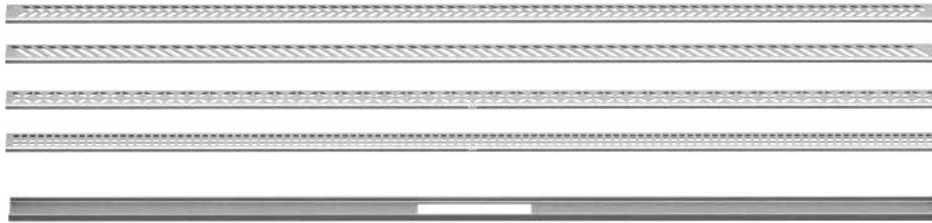

**1x** Grate

4 options:

- HERRINGBONE
- SLANT
- FLORAL
- SQUARE



**2x**

End caps

**1x** Channel




HERRINGBONE




SLANT



FLORAL



SQUARE




### Grate and Channel Kit – Brushed stainless steel

Length = cm - in.	HERRINGBONE	SLANT	FLORAL	SQUARE
	Item No.	Item No.	Item No.	Item No.
122 - 48	KL VRI D13 EB 122	KL VRI D14 EB 122	KL VRI D5 EB 122	KL VRI D3 EB 122
244 - 96	KL VRI D13 EB 244	KL VRI D14 EB 244	KL VRI D5 EB 244	KL VRI D3 EB 244

### Grate and Channel Kit – Textured color-coated stainless steel

Length = cm - in.	HERRINGBONE	SLANT	FLORAL	SQUARE
	Item No.	Item No.	Item No.	Item No.
122 - 48	KL VRI D13 + color* 122	KL VRI D14 + color* 122	KL VRI D5 + color* 122	KL VRI D3 + color* 122
244 - 96	KL VRI D13 + color* 244	KL VRI D14 + color* 244	KL VRI D5 + color* 244	KL VRI D3 + color* 244

### \*Color Codes



\* To complete the item number, add the color code (e.g., KL VRI D3 TSI 122).



## Product Listings and Certifications Table

Schluter®-KERDI-DRAIN - Listings and Certifications								
Grates  Flanges	Grate - 4" (100 mm)					Grate - 6" (150 mm)		
	CLASSIC Stainless steel (All finishes except EOB)	CLASSIC Stainless steel EOB	CONTOUR Anodized aluminum (All finishes)	TILE	STYLE PURE, CURVE and FLORAL Stainless steel (All finishes)	Stainless steel		
						Square 6E	Round 6RE	Cover 6CE
2" (50 mm) PVC	1	-	1	1	1	1	1	2
2" (50 mm) ABS	1	-	1	1	1	1	1	2
2" (50 mm) PVC Horizontal	1	-	1	1	1	1	1	2
2" (50 mm) ABS Horizontal	1	-	1	1	1	1	1	2
2" (50 mm) Stainless steel	1	-	1	1	1	1	1	2
2" (50 mm) Stainless steel Threaded	1	-	1	1	1	1	1	2
3" (75 mm) PVC	-	-	-	-	-	1	1	2
3" (75 mm) ABS	-	-	-	-	-	1	1	2
3" (75 mm) Stainless steel	-	-	-	-	-	1	1	2
5-1/2" (139.7 mm) Adaptor	3	-	3	3	3	-	-	-
7-1/2" (191 mm) Adaptor	-	-	-	-	-	3	3	-

Various configurations of KERDI-DRAIN are listed by ICC-ES (Report No. PMG-1204), UPC® and CSA as shown in the table above.

- 1 - Listed by ICC-ES (Report No. PMG-1204), UPC® and CSA.
- 2 - Listed by CSA
- 3 - Listed by ICC-ES (Report No. PMG-1204) and UPC®.

For copies of these documents, please contact Schluter®-Systems at 800-472-4588 or by email at [info@schluter.com](mailto:info@schluter.com). Links to the documents can also be accessed at [schluter.com](http://schluter.com).



# WARRANTIES

Schluter-Systems products and systems are covered under our warranty program, as applicable. For details and to access Schluter Systems' warranty documents:

Visit [www.schluter.com/warranties](http://www.schluter.com/warranties)

Or scan here



To obtain hard copies, please contact Customer Service at: 800-472-4588 (USA) or 800-667-8746 (Canada).

