


Item Number: C0006

WARNING (To reduce the risk of fire, electric shock, or injury to persons):


1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “**OFF**” position. B). Place the wall switch in the “**OFF**” position.
4. The Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing the bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.
10. Do not touch the bulb or lamp shade during the lighting fixture working.
11. An individual grounding conductor of a chain-and-canopy suspended luminaire shall be interwoven through the chain from the luminaire to the canopy

Image for the finished product:

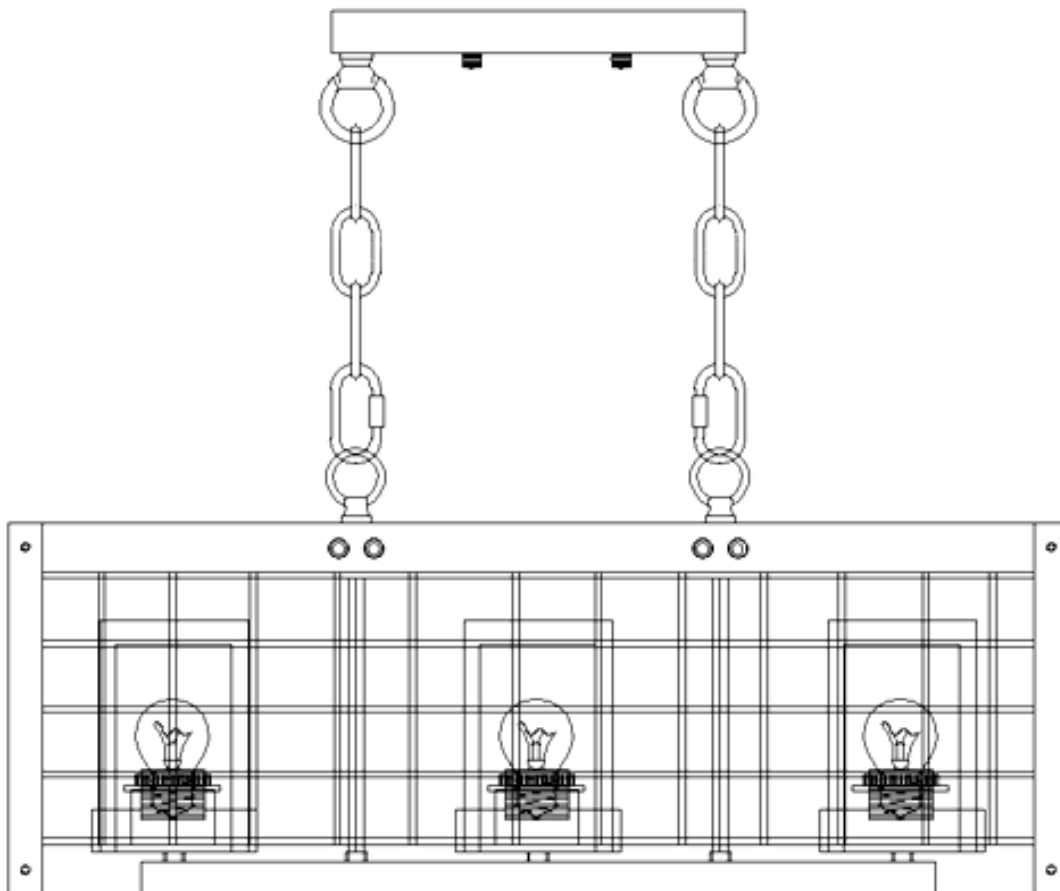


Installation Procedures:

1. Open the package and take out all the parts or accessories, then place them on a clean flat place.
2. Turn off power at the circuit box to avoid possible electric shock.
3. Assemble the light fixture as below procedure:
4. Connect two straight tubes 2 to part 1 on the fixture.
5. Fix tube 2 with the part 3 on the fixture, then fix it tightly with ring 4.
6. Connect hanging chain 5 to the ring 4 with the locking hook.
7. Fix the hanging chain 5 to the canopy 7 with the locking hooks 6.
8. Fix Mounting Plate 8 to the Outlet Box in the ceiling by screw 9.
9. Connect wires from lamp to the Outlet Box by wire connectors 10, more details as below:

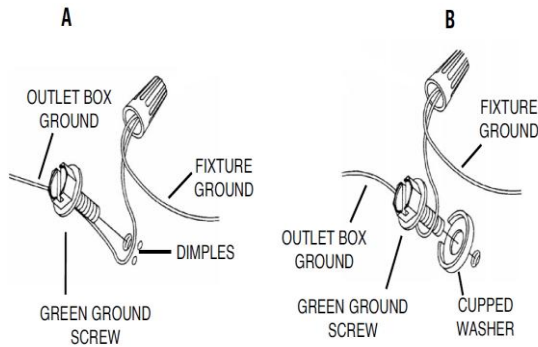

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



10. Push canopy 7 upward to the outlet box and secure it with the screw nuts 11 until snug.
11. Fix the glass shade 12 and the cover ring 13 to the lamp base. Then install bulb 14 (Bulb not included).
12. Check everything installed correctly, then you can turn on the light.

