

PARLOS®





Installation Guide

If you have any question or need help,
please visit **PARLOS®** website
<http://www.parlos.com>



Single Hole Application

3-Hole Application

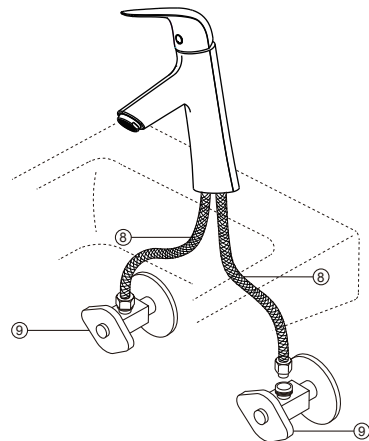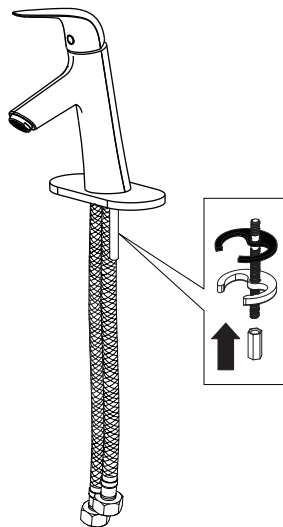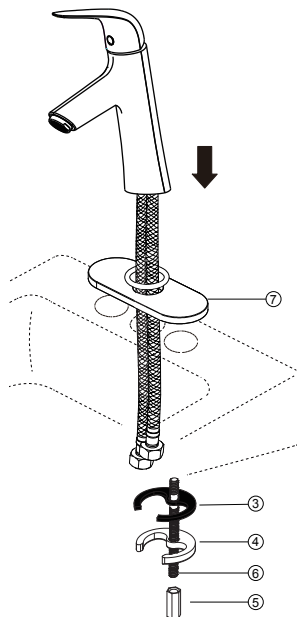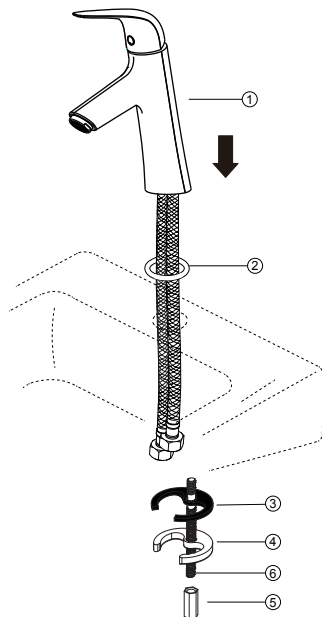

1. Install Gasket (2) onto Faucet Body (1).
Slide single hole faucet through the sink mounting hole.
Note: Escutcheon (7) is included for 3-Hole applications.


2. Place Stainless Steel Washer (4) and Rubber Washer (3) onto Mounting Studs (6) under the sink, and tighten the Mounting Nuts (5) securely as shown.

3. Connect and screw on the Supply Hoses (8) to Valves (9).
4. Turn on faucet to check for leaks.




NOTES:


- Fits for sink WITH overflow hole.
- Clean the sink hole, make sure to remove debris.
- Please avoid using plumber's putty. The seal on top is leak-free. Plumber's putty might cause damage.
- Silicone and plumbing tape can be used for sealing requirement.




1 Unscrew components A & B to the seal.

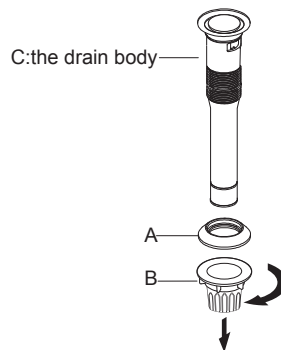


2 Slide the drain body C through the hole in the sink.



3 Screw components A & B back on as shown.



4 Connect the rear end of the drain to the Drain Pipe.



5 Push to activate.

