




验 货 报 告

结果根据下列检验要求和发现的问题判定；
检验要求：
1、采用的检验标准:参考 GB4706/UL507/EN60335
2、采用的抽样标准:参考 ANSI/ASQC Z1.4/GB2828
3、常规检验的单次抽样方法
4、总检验标准 S-4： 严重：0 重要：1.0 次要：4.0

P0资料								
P0#	HE20220228-1			外箱毛重	/KG			
工厂	零点科技	客户/品牌	Geek Chef		单台毛重	5.23KG		
型号	GT010PB	外箱尺寸 (mm)	/		裸机重量	4.39KG		
国家	跨境	彩盒尺寸 (mm)	334*330*330		订单数量	1880PCS		
品类	空气烤箱	产品尺寸 (mm)	300*315*290		台/外箱	1PCS		
颜色	黑色	工厂联系人	陈工		已生产数量	1880PCS		
工厂地址	勒流				已包装数量	1880PCS		
测试/检验类型：		总体检验结果：		抽样数量（PCS）	判定类别	严重	重要	轻微
抽检检验		合格		125	允许缺陷数量	0	3	10
检验员	周兆桐	检验日期	2022. 4. 30		发现的数量	0	2	0

发现:							
序号	检验过程中发现的问题			问题图片	问题类别	问题数量	
1、	计时器旋钮脱落				重要	2	
2、							
3、							
4、							
5、							

测试项目:				
检测项	测试数量 (pcs)	测试参数	结论	
			通过	不通过
1、耐压测试:	125	金属外壳1500V/3mA/2S	√	
	/	定频1250V/10mA/60S	N/A	
	/	变频1250V/30mA/60S	N/A	
	/	塑料外壳3750V/5mA/60S	N/A	
2、接地测试	/	25A /R≤100mΩ /10S	N/A	
3、泄露电流	/	额度电压X1.06倍≥0.75MA	N/A	
4、绝缘电阻	/	500VDC/R≥2MΩ /60S	N/A	
5、输入功率电流	125	实测电流≥额定电流*1.1	√	
		实测功率≥额定功率的上限+5%下限-10%	√	
		标称功率: 1400W, 实测功率: 1368W	√	
6、稳定性测试	/	10度倾斜测试机器不倾倒	N/A	
	1	15度倾斜测试机器不倾倒	√	
7、电源线拉力测试	/	100N/25次, 软线位移不超2mm	N/A	
	1	156N/1分钟, 软线位移不超2mm	√	
8、跌落测试	1	按ISTA 3A 跌落	√	
	/	610MM/一角三边六面	N/A	
	/	/一角三边六面	N/A	
9、承压测试	1	按照重量*3, 标称重量: 300g, 承压重量1000g	√	
10、干烧保护	4	保护器动作以及能正常复位	√	
11、温升测试	1	按认证要求或工厂提供测试报告	√	
12、保护功能验证	1	能正常启动保护以及复位	√	
13、功能测试	5	食物色均匀、不能出现严重焦或者不熟现象	√	




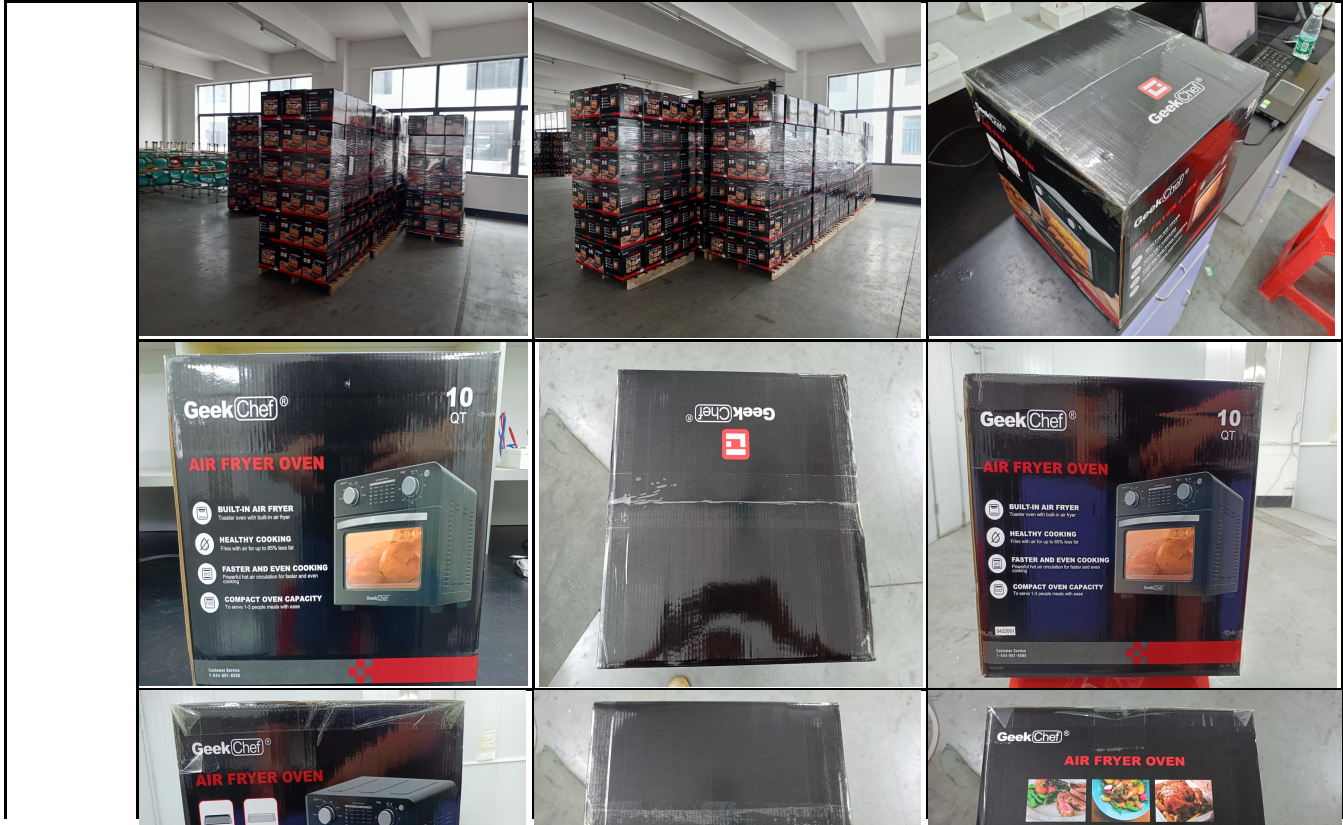


包装










外观









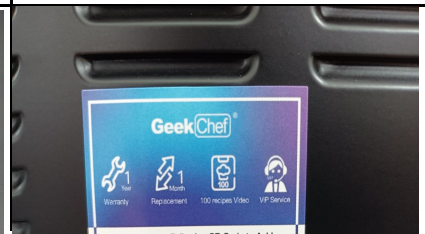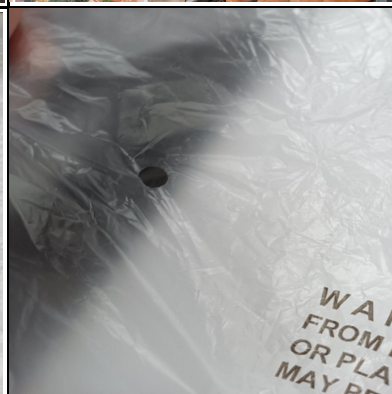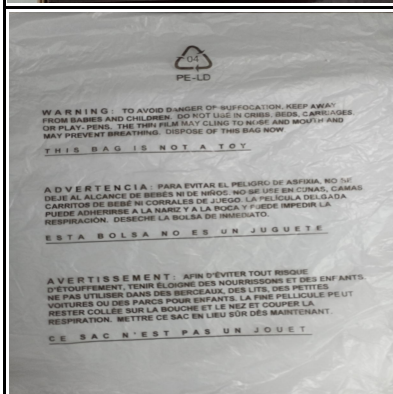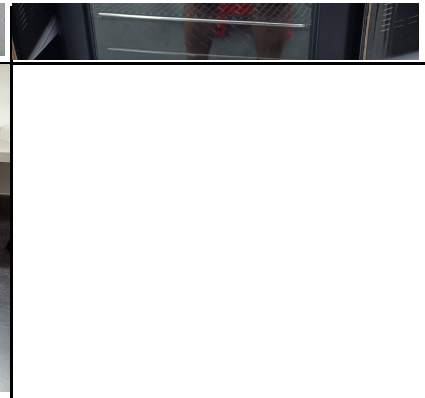



标贴附件

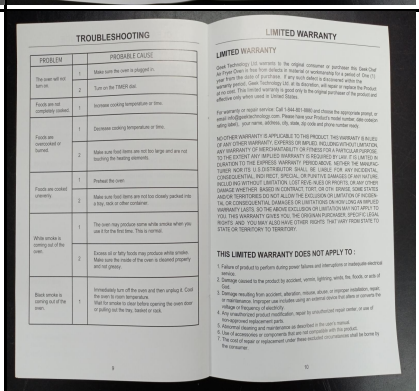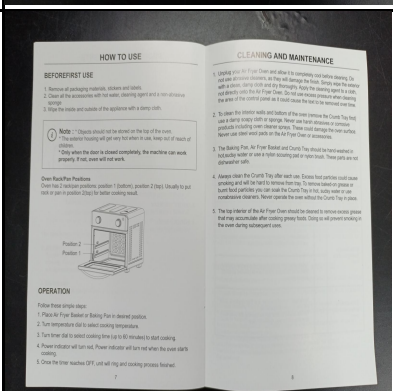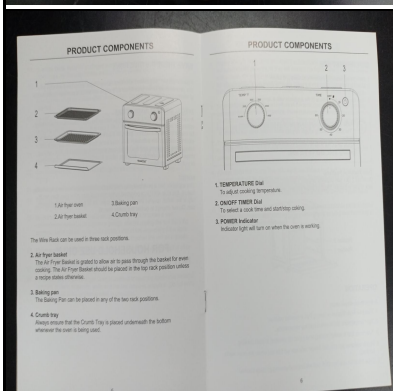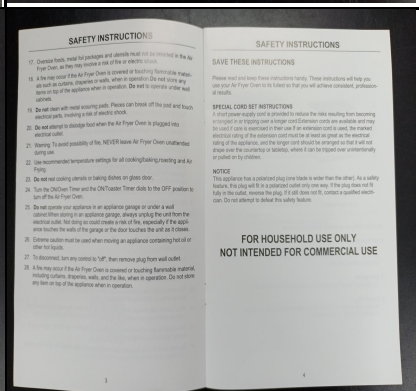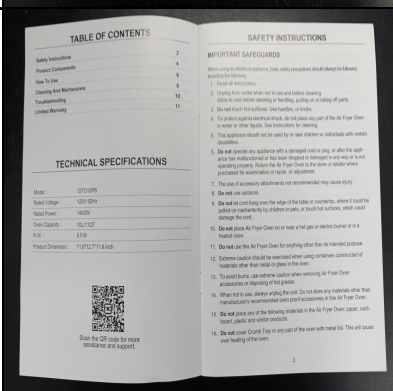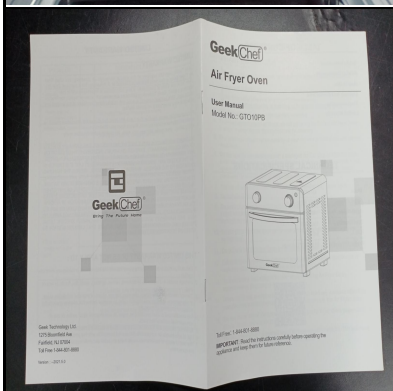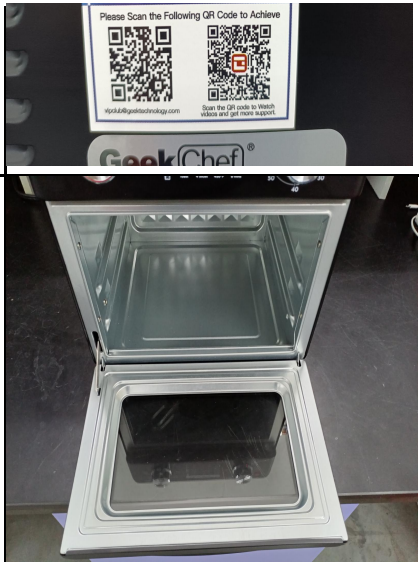


性能测试

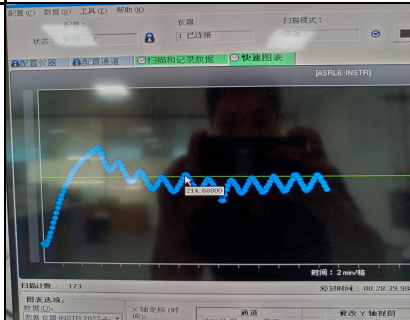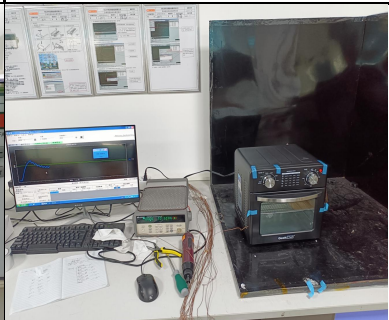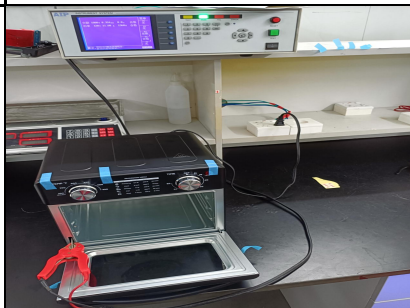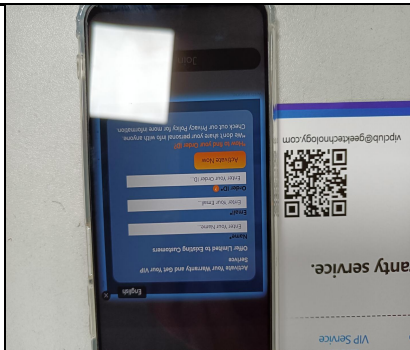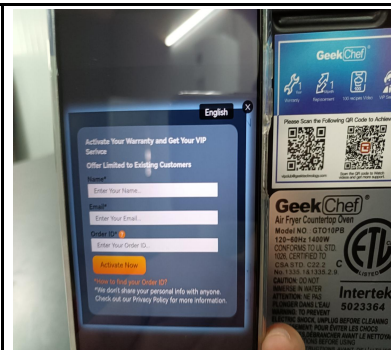

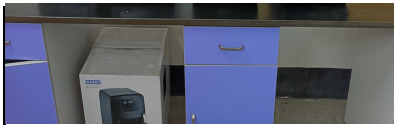

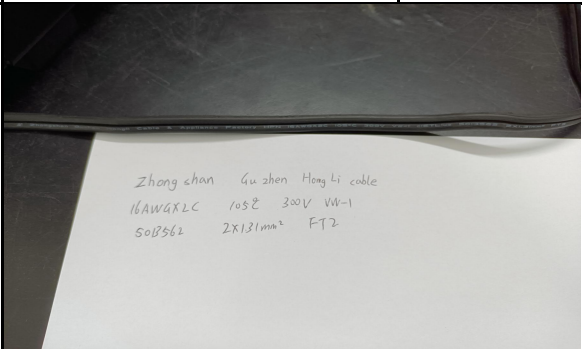	Power Supply Cord Set	Various	HPN	Rated 300V, 105°C, VW-1, 2 x 16AWG, cord length range 0.6 - 2.1m, flexible cord terminal with a recognized 2-wire polarized plug, 1-15P.
	Timer	JIANGSU SHALONG MECHANICAL & ELECTRICAL TECHNOLOGY CO LTD (E210866)	SL-15 SL-30 SL-30B SL-60C SL-120 SL-90 SL-180	Rated 120Vac, 60Hz, Max. 15A resistive.
	Thermostat	FO SHAN AI GE APPLIANCES CO LTD (E253918)	K	Rated 125V, 15A, max. Ts-p=250° C, endurance 30,000 Cycles.
	Motor	Foshan Longbao Motor Electrical Appliance Co Ltd (E498272)	LB-6113	Rated 120Vac, 60Hz, class H insulation system.
	Heating Element	HUACHANG ELEECTRIC HEATING	G	Sheathed type heating element. Rated 120V, 1400W, consisted of OCR25AL5 resistance wire, 9.8ohm, overall Φ0.42mm, embedded in MgO compound insulation, and encased in a 0.5mm thick SUS304 sheath with 6.6mm outside diameter, Each ending ending sealed by a cemarc cap. Resistance wire mechanically secured to the Φ2mm cold pin.

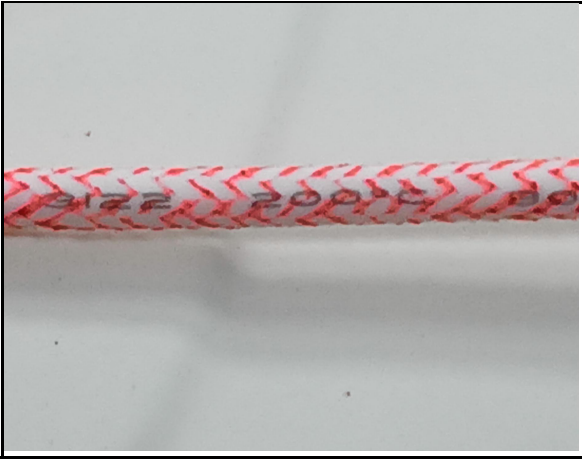	Internal Wire	Various	3122	Rated 300V, 200°C. Min. 18AWG, for connection between heater, motor, lamp, thermostat and timer. Min. 22AWG, for connection of indicated lamp.
--	---------------	---------	------	---