



KTEB-220-1-TP-EMI /G	
Ballast Type	Electronic
Starting Method	Rapid Start
Lamp Connection	Parallel
Input Voltage	120Vac $\pm$ 10%
Input Frequency	60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F20T8	2	34	0.50	0.57	1.52	0.88	2.59	130
F20T12	2	34	0.50	0.57	1.52	0.88	2.59	130
F18T8	2	34	0.49	0.57	1.54	0.94	2.76	130
F17T8	2	36	0.52	0.58	1.52	1.00	2.78	130
F15T8	2	31	0.46	0.56	1.57	1.00	3.23	130
F15T12	2	31	0.46	0.56	1.57	1.00	3.23	130
F14T8	2	27	0.41	0.54	1.60	0.88	3.26	130
F14T12	2	27	0.41	0.54	1.60	0.88	3.26	130

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected
- Meets FCC Part 18 (Class B) Consumer Limits
- 3-Year Warranty


APPROVALS:

- UL, cUL 935 listed
- Energy Star V1.1


PHYSICAL DIMENSIONS:

Length (L): 6.46"
Width (W): 1.37"
Height (H): 1.00"
Mounting (M): 6.00"

Lead Length:
White, Black 13" x 13"
Blue 18" x 18", 8" x 8"
Red 18" x 18", 8" x 8"

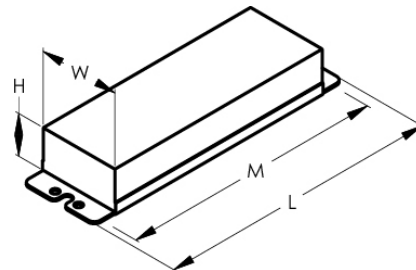

WIRING DIAGRAM:

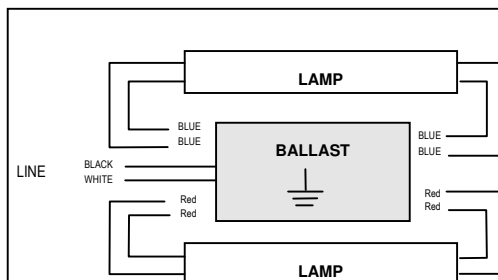

HOT SPOT LOCATION:

